

## AMA BIANCO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039667</b> | 40X120    | 10,90          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## CONTRACT BIANCO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039668</b> | 40X120    | 10,60          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## SHAPE BIANCO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039681</b> | 40X120    | 11,20          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## AMA GRIGIO RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039070</b> | 60x120    | 9,50           | PC BIA GL |

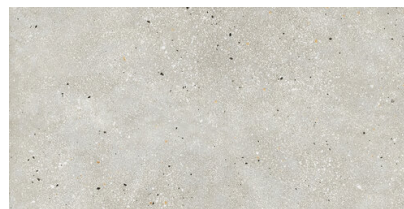

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## RICETTA GRIGIO RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039095</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## AMA GRIGIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039046</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## ANTI-SLIP AMA GRIGIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039059</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)  | EN 16165-B     | R11     |

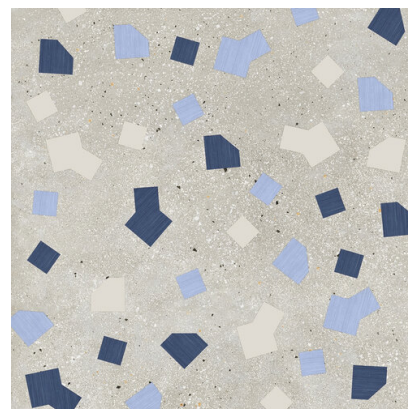

## RICETTA GRIGIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039051</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

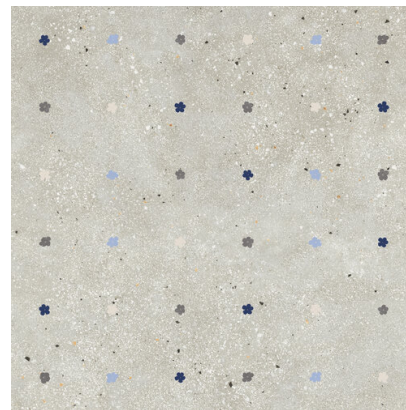

## FIORI GRIGIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039286</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |



## AMA GRIGIO RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039075</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

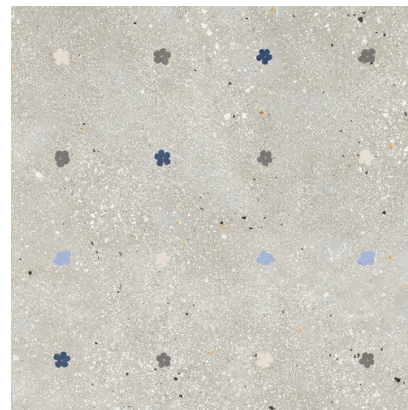

## FIORI GRIGIO RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039160</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## RICETTA GRIGIO TAGLIO 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039165</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                    |
|--------------------------------------|-----------------|--------------------|
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                 |
| Frost resistance                     | EN ISO 10545-12 | It stands the test |

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## AMA GRIGIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039551</b> | 40X120    | 11,40          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## CONTRACT GRIGIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039554</b> | 40X120    | 11,10          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## SHAPE GRIGIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039680</b> | 40X120    | 11,00          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR SET(2) AMA GRIGIO 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039809</b> | 40X120    | 11,80          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |      |
|------------------|-----------------|------|
| Frost resistance | EN ISO 10545-12 | 0.00 |
|------------------|-----------------|------|

### CHEMICAL PROPERTIES

## AMA CENERE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039068</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## RICETTA CENERE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039098</b> | 60x120    | 9,40           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## AMA CENERE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039044</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## ANTI-SLIP AMA CENERE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039057</b> | 90X90     | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)  | EN 16165-B     | R11     |



## RICETTA CENERE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039049</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

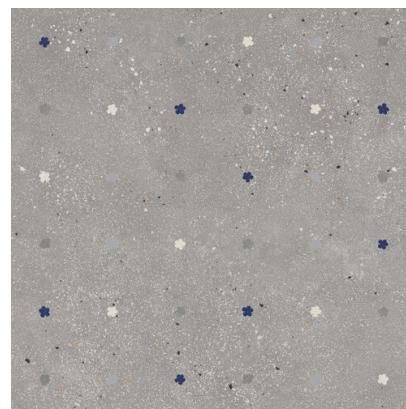

## FIORI CENERE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039284</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

## AMA CENERE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039073</b> | 60X60     | 8,40           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

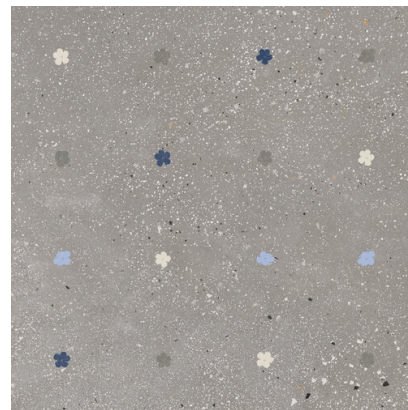

## FIORI CENERE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039158</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

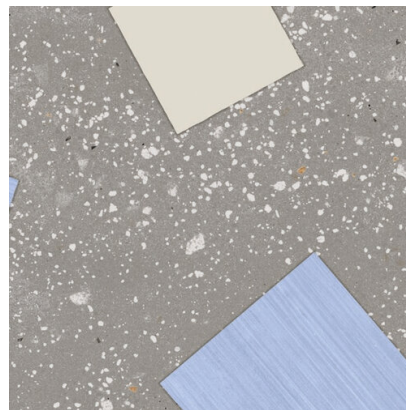

## RICETTA CENERE TAGLIO 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039163</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                    |
|--------------------------------------|-----------------|--------------------|
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                |
| Frost resistance                     | EN ISO 10545-12 | It stands the test |

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## AMA GRAPHITE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039071</b> | 60x120    | 9,60           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES


|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## RICETTA GRAPHITE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039096</b> | 60x120    | 9,50           | PC BIA GL |

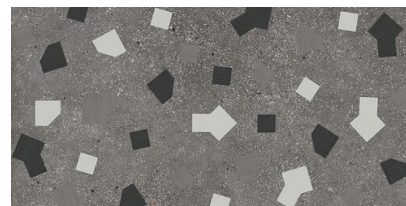

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## AMA GRAPHITE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039047</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                            |                |         |
|----------------------------|----------------|---------|
| Slip resistance (Rd)       | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)        | EN 16165-B     | R10     |
| Slip resistance (barefeet) | EN 16165-A     | B       |

## ANTI-SLIP AMA GRAPHITE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039060</b> | 90X90     | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)  | EN 16165-B     | R11     |

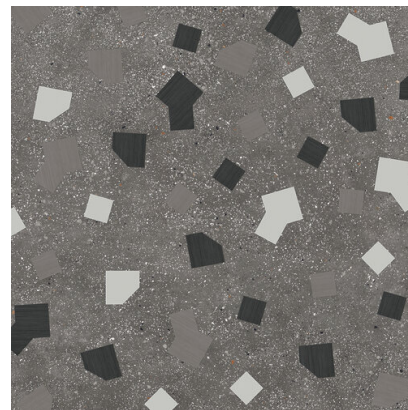

## RICETTA GRAPHITE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039052</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

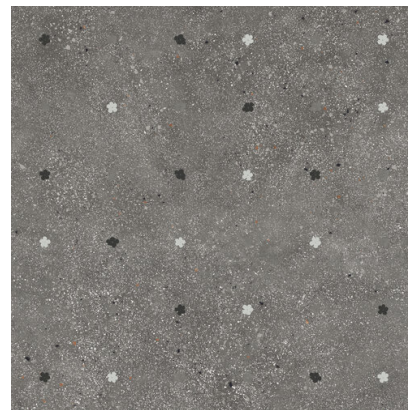

## FIORI GRAPHITE RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039285</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

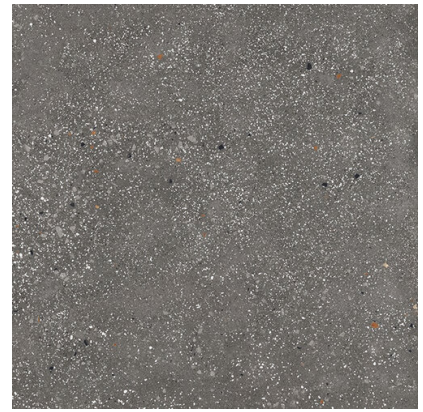

## AMA GRAPHITE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039076</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

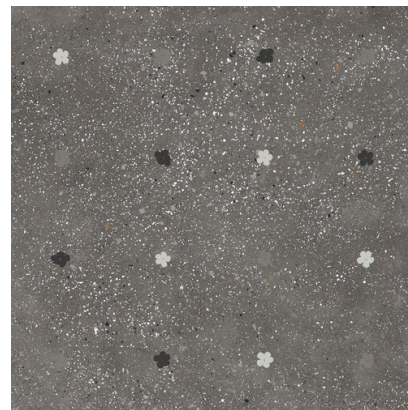

## FIORI GRAPHITE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039159</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

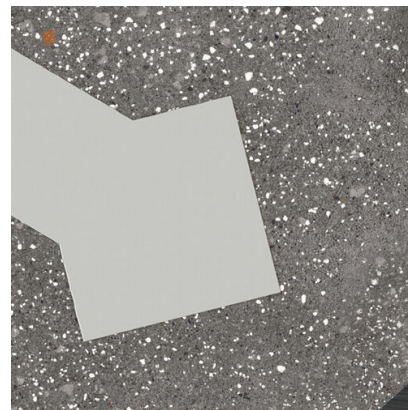

## RICETTA GRAPHITE TAGLIO 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039164</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                    |
|--------------------------------------|-----------------|--------------------|
| Water absorption capacity            | EN ISO 10545-03 | 0.00               |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                |
| Frost resistance                     | EN ISO 10545-12 | It stands the test |

#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## AMA AVORIO RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039069</b> | 60x120    | 9,00           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## RICETTA AVORIO RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039094</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                 |                 |      |
|---------------------------------|-----------------|------|
| Resistance to cleaning products | EN ISO 10545-13 | 0.00 |
| Stains resistance               | EN ISO 10545-14 | 3    |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## AMA AVORIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039045</b> | 90X90     | 9,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## ANTI-SLIP AMA AVORIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039058</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)  | EN 16165-B     | R11     |

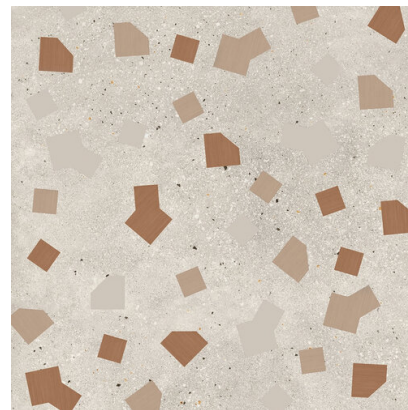

## RICETTA AVORIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039050</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

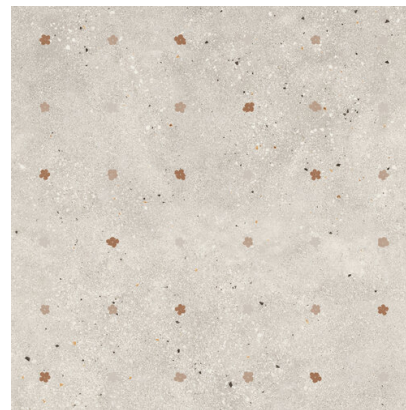

## FIORI AVORIO RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039283</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |

## AMA AVORIO RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039074</b> | 60X60     | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES


|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## FIORI AVORIO RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039157</b> | 60X60     | 8,40           | PC BIA GL |

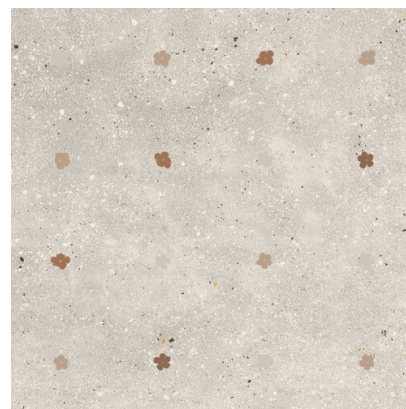

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                       |                 |      |
|-----------------------|-----------------|------|
| Resistance to alcalis | EN ISO 10545-13 | 0.00 |
| Stains resistance     | EN ISO 10545-14 | 3    |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## RICETTA AVORIO TAGLIO 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039162</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                    |
|--------------------------------------|-----------------|--------------------|
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                 |
| Frost resistance                     | EN ISO 10545-12 | It stands the test |


#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## AMA AVORIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039549</b> | 40X120    | 11,30          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## CONTRACT AVORIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039552</b> | 40X120    | 11,30          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## SHAPE AVORIO RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A039679</b> | 40X120    | 11,10          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test     |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | 0.00                   |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## AMA TORTORA RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039067</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## RICETTA TORTORA RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039097</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## AMA TORTORA RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039043</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GB  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GB  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## ANTI-SLIP AMA TORTORA RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039056</b> | 90X90     | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 3 |
| Slip resistance (R)  | EN 16165-B     | R11     |



## RICETTA TORTORA RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039048</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |



## FIORI TORTORA RECT 90X90

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039287</b> | 90X90     | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
| Slip resistance (R)  | EN 16165-B     | R10  |



## AMA TORTORA RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039072</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

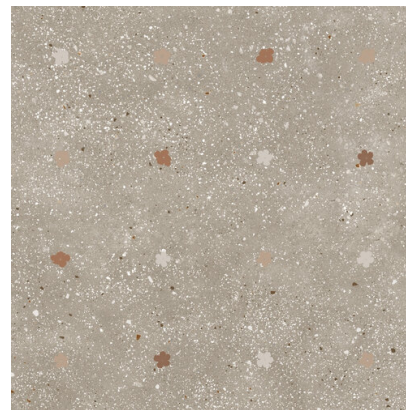

## FIORI TORTORA RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039161</b> | 60X60     | 8,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                   |                 |   |
|-------------------|-----------------|---|
| Stains resistance | EN ISO 10545-14 | 3 |
|-------------------|-----------------|---|

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## RICETTA TORTORA TAGLIO 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039166</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                    |
|--------------------------------------|-----------------|--------------------|
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                |
| Frost resistance                     | EN ISO 10545-12 | It stands the test |


#### CHEMICAL PROPERTIES

#### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

LAVABO DE PIE ROMA

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040867   |           | 0,00           | PC BIA GL |

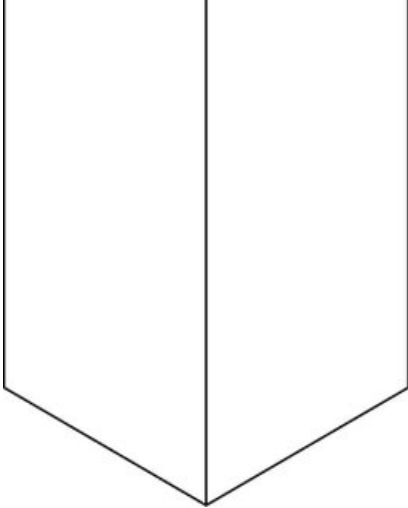

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

LAVABO NISO DCHA.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040866   |           | 0,00           | PC BIA GL |

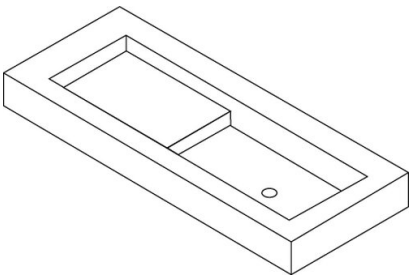

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## LAVABO NISO IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040865</b> |           | 0,00           | PC BIA GL |

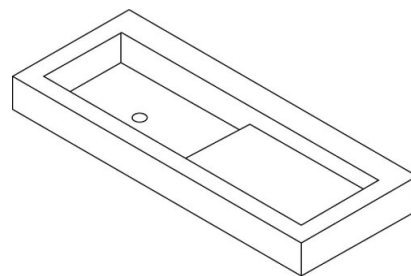

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO AXEL CEN.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040870</b> |           | 0,00           | PC BIA GL |

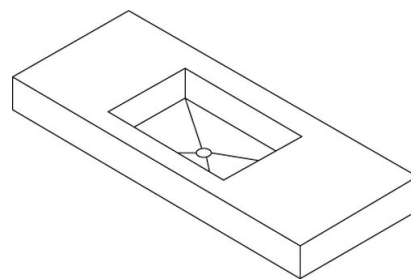

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

LAVABO AXEL DCHA.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040869   |           | 0,00           | PC BIA GL |

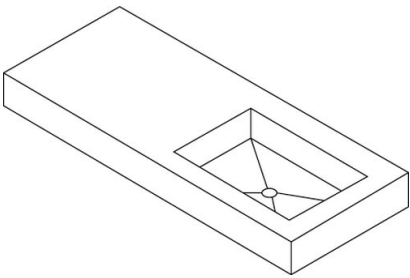

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

LAVABO AXEL IZQ.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040868   |           | 0,00           | PC BIA GL |

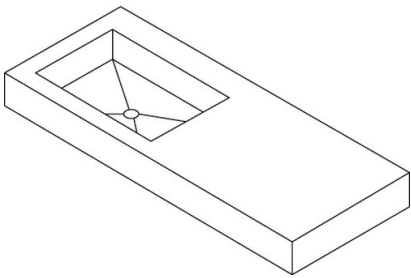

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## LAVABO AXEL DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040871</b> |           | 0,00           | PC BIA GL |

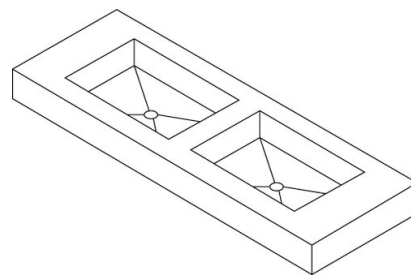

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA CEN.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040874</b> |           | 0,00           | PC BIA GL |

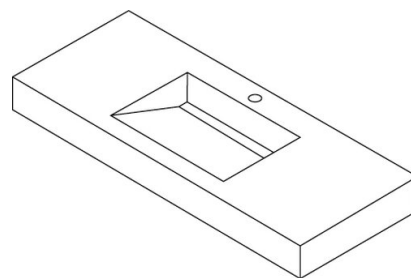

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA DCHA.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040873</b> |           | 0,00           | PC BIA GL |

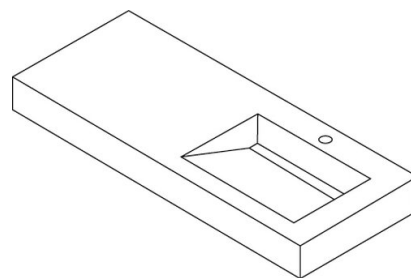

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040872</b> |           | 0,00           | PC BIA GL |

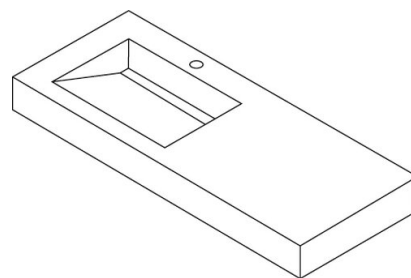

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040875</b> |           | 0,00           | PC BIA GL |

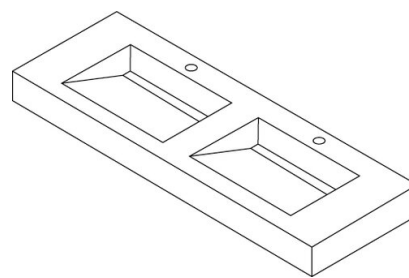

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES