





PROFESSIONAL

GENERAL CATALOGUE



This catalogue is protected under the Spanish Intellectual Property Act (Royal Decree 1/1996).
Any reproduction of its contents, in whole or in part, without the express consent of PORCELANOSA Grupo
will be subject to punitive action under the Spanish Criminal Code.

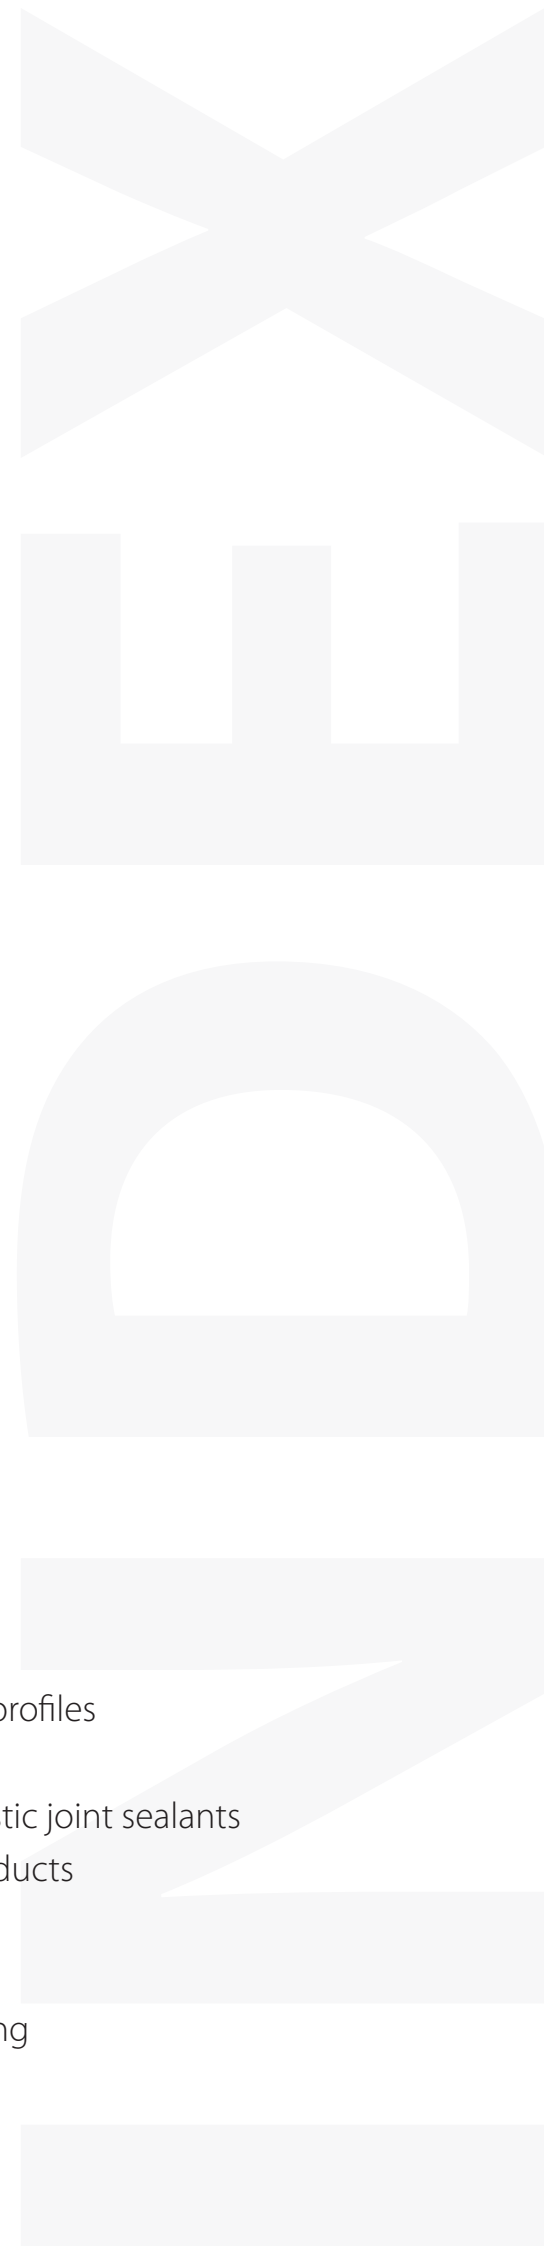

Index

- 6 Decorative and technical profiles
- 56 Tile installation adhesives
- 80 Grouting material and elastic joint sealants
- 102 Substrate preparation products
- 116 Waterproofing
- 132 Acoustic insulation
- 140 Electric radiant floor heating
- 144 concept xps



Profiles

Decorative profiles

Elegance collection	12
Gold collection	24
Metal collection	26
Chrome collection	28
Wood collection	30
pro-telo collection	31

Corner profiles and trims for wall tiles

pro-mate 2	34
pro-mate 3	35
pro-mate 5	36
pro-part Li	37
pro-part	38
pro-mate 45	40
pro-corner	42
XLIGHT profiles	43

Technical profiles

pro-T	46
pro-level	47
pro-dilata	48
Expansion joints	49
pro-step	50
pro-flex	51
pro-sanit	52
pro-plint	53
pro-skirting	54

Graphic index

Decorative profiles



Elegance collection
Page 12



Gold collection
Page 24



Metal collection
Page 26



Chrome collection
Page 28



Wood collection
Page 30



pro-telo collection
Page 31

Corner profiles and trims for wall tiles



pro-mate 2
Page 34



pro-mate 3
Page 35



pro-mate 5
Page 36



pro-part Li
Page 37



pro-part
Page 38




pro-mate 45
Page 40




pro-corner
Page 42

Technical profiles

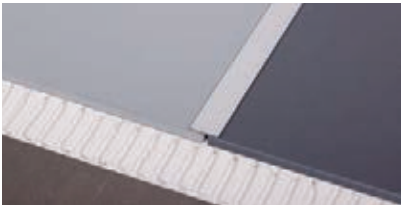


pro-T
Page 46

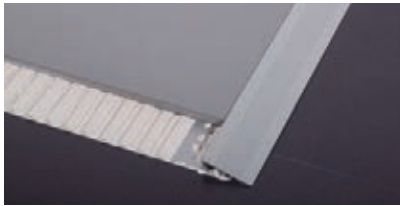


pro-level
Page 47




pro-dilata
Page 48

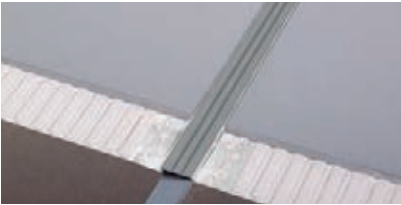

Structural joints
Page 49

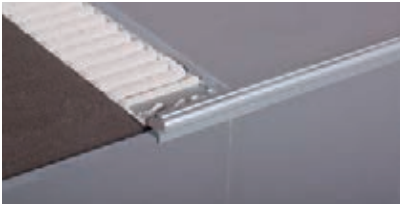

pro-step
Page 50

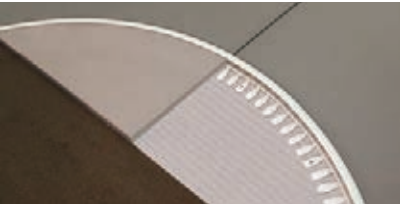

pro-flex
Page 51



pro-sanit
Page 52



pro-plint
Page 53



pro-skirting
Page 54



Decorative profiles

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-part Li chromed brass SW 1500

pro-part Li Gold SW 1500

Chromed brass profile plated in 24 k gold. Made with Swarovski Elements



pro-part Li Gold SW 1500 11 mm
11 x 11 x 2500 mm

B73141324 100130432
535 p/u

pro-part Li Chrome SW 1500

Chromed brass profile. Made with Swarovski Elements



pro-part Li chromed brass SW 1500 11 mm
11 x 11 x 2500 mm

B71342597 100120372
490 p/u

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-part Li Crystal rock SW Silver

pro-part Li Crystal rock SW Silver

Chromed brass profile. Made with Swarovski Elements




pro-part Li Crystal rock SW Silver 11 mm
11x11x2500 mm

B73141325 100130429
439 p/u

pro-part Li Crystal rock SW Graphite

Brass profile with dark metallic finish. Made with Swarovski Elements

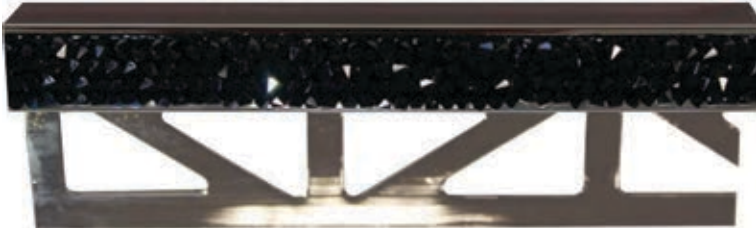

pro-part Li Crystal rock SW Graphite 11 mm
11x11x 2500 mm

B73141326 100130428
492 p/u

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-part Li Crystal sand SW Silver

pro-part Li Crystal sand SW Gold

24 k gold plated brass. Made with Swarovski Elements



pro-part Li Crystal sand SW Gold 11 mm
11x11x2500 mm

B73141323 100130430
366 p/u

pro-part Li Crystal sand SW Silver

Chromed brass profile. Made with Swarovski Elements



pro-part Li Crystal sand SW Silver 11 mm
11x11x2500 mm

B73141322 100130431
312 p/u

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-mate 5 Gold SW 168

pro-mate 5 Gold SW 500

24 k gold plated brass. Made with Swarovski Elements



pro-mate 5 Gold SW 500 11 mm
5x11x2500 mm

B71342585 100104649
366 p/u

pro-mate 5 Gold SW 168

24 k gold plated brass. Made with Swarovski Elements



pro-mate 5 Gold SW 168 11 mm
5x11x2500 mm

B71342587 100109076
257 p/u

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-mate 5 Chrome SW 500

pro-mate 5 Chrome SW 500

Chromed brass profile. Made with Swarovski Elements



pro-mate 5 chromed brass SW 500 11 mm
5x11x2500 mm

B71342584 100104650
339.85 p/u

pro-mate 5 Chrome SW 168

Chromed brass profile. Made with Swarovski Elements



pro-mate 5 chromed brass SW 168 11 mm
5x11x2500 mm

B71342586 100109077
198 p/u

Elegance collection

High-end decorative profile for ceramic wall tiling, made with Swarovski crystals.
Replaces the traditional decorative ceramic listellos by new design metallic lines.



pro-mate 5 chrome SW glass

pro-mate 5 chrome SW glass

Chromed brass profile. Made with Swarovski Elements




pro-mate 5 chromed brass SW glass 11 mm
5x11x2500 mm

B71342603 100120358
339.85 p/u

Gold collection

High-end decorative profile for wall tiles, 24K gold plated.
It substitutes the traditional ceramic frieze by a metallic line with an exclusive design.



pro-mate 5

24K Gold			
KEA	SAP	h (mm)	P/EU
B71342573	100100722	12.5	91,35 p/u
B71342572	100100721	11	90,20 p/u

pro-part

24K Gold			
KEA	SAP	h (mm)	P/EU
B71342575	100100725	12.5	94.45 p/u
B71342577	100100724	11	92.05 p/u

pro-part Li


24K Gold				
KEA	SAP	a (mm)	h (mm)	P/EU
B71342578	100100762	12,5	11,5	102.50 p/u
B71342574	100100726	11	10	98.65 p/u



Metal collection

Metallic finish decorative profiles for ceramic wall tiles. It substitutes the traditional ceramic frieze.

Available in five finishes, they represent an excellent complement for stone or metal-inspired wall tiles. Suitable for corner trims.

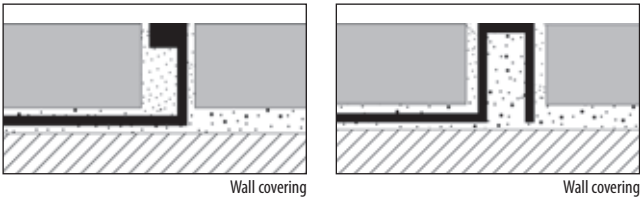

pro-mate 5

graphite			
KEA	SAP	h (mm)	P/EU
B71342598	100120359	11	73.90 p/u

oxyde			
KEA	SAP	h (mm)	P/EU
B71342599	100120364	11	88.30 p/u

pro-part



ocean			
KEA	SAP	h (mm)	P/EU
B71342595	100120370	11	77.70 p/u

moon			
KEA	SAP	h (mm)	P/EU
B71342591	100120369	11	79.95 p/u

graphite			
KEA	SAP	h (mm)	P/EU
B71342590	100120366	11	79.10 p/u

oxyde			
KEA	SAP	h (mm)	P/EU
B71342601	100120371	11	74.10 p/u


line			
KEA	SAP	h (mm)	P/EU
B71342593	100120367	matte	75.60 p/u



ocean



moon



graphite



oxyde




line

Chrome collection

Chromed brass decorative profile for wall tiles. It substitutes the traditional decorative ceramic frieze. Typical LIFESTYLE by PROCELANOSA profile.

Suitable for trimming corners and transitions between ceramic tiles.



pro-mate 3

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342608	100126772	XLIGHT	6	57.00 p/u
B71133001	100004951		8	48.90 p/u
B71133002	100004952		9	49.50 p/u
B71133003	100004953		10	50.10 p/u
B71133004	100004954		12.5	51.30 p/u

pro-mate 5

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342611	100126779	XLIGHT	7	48.90 p/u
B71132003	100004945		9	57.30 p/u
B71132004	100004946		11	59.40 p/u
B71134004	100004955		12.5	61.50 p/u

pro-part

Chromed brass

KEA	SAP		h (mm)	P/EU
B73134001	100005368	XLIGHT	7	60.90 p/u
B73134002	100005369		9	63.30 p/u
B71342552	100088905		10	64.30 p/u
B73134003	100005370		11	65.70 p/u
B73141319	100097895	Porcelanosa	11	68.70 p/u
B73134004	100005371	Shade 1	12.5	67.80 p/u
B73141312	100033129	Shade 2	12.5	67.80 p/u
B73134005	100005372		15	71.40 p/u

Chromed brass corner

KEA	SAP		h (mm)	P/EU
B73134301	100005373	XLIGHT	7	22.80 p/u
B73134302	100005374		9	22.80 p/u
B71342554	100091065		10	22.85 p/u
B73134303	100005375		11	22.80 p/u
B73134304	100005376		12.5	22.80 p/u
B71342541	100067718		15	24.80 p/u

pro-part Li

Chromed brass

KEA	SAP		h (mm)	a (mm)	P/EU
B71342618	100126780	XLIGHT	4,5	5,5	60.00 p/u
B71342542	100070170		11	12	75.00 p/u
B71342543	100070171		12,5	13,5	79.00 p/u
B71342545	100073492		15	16	81.00 p/u

Chromed brass corner

KEA	SAP		h (mm)	P/EU
B72141343	100098464		11	24.60 p/u
B71342550	100085153		12.5	27.00 p/u

pro-telo mosaic


Chromed brass

KEA	SAP		h (mm)	P/EU
B72141345	100099966	Mosaic 25	4	69.00 p/u
B72141355	100104654	Mosaic Porcelanosa	4	100.00 p/u

Wood collection

Wood profiles for wall and floor tile coverings. Page Excellent solution for the design of ceramic settings with either contemporary or traditional style.

Available as a decorative line for ceramic wall tiles and as special pieces for steps.

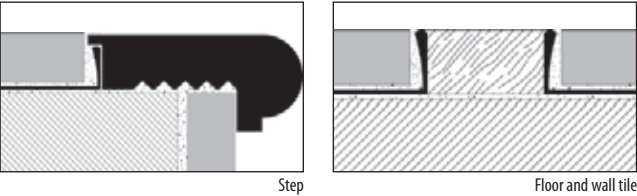

pro-telo W

pro-telo W 15 chromed brass

KEA	SAP		h (mm)	P/EU
B72141306	100032362	Caoba 15	12.5	137.96 p/u
B72141309	100032360	Wenge 15	12.5	147.65 p/u
B72141314	100032364	Nogal 15	12.5	140.38 p/u

pro-telo W 25 chromed brass

KEA	SAP		h (mm)	P/EU
B72141305	100032363	Caoba 25	12.5	140.38 p/u
B72141312	100032361	Wenge 25	12.5	150.07 p/u
B72141310	100032365	Nogal 25	12.5	145.22 p/u

pro-step W

pro-step W

KEA	SAP		h (mm)	P/EU
B76211006	100005503	Milano	12.5	91.10 p/u
B76211005	100005502	Monaco	12.5	90.40 p/u

pro-step W

pro-step W

KEA	SAP		h (mm)	P/EU
B76211001	100005498	Avignon	10	89.09 p/u

pro-telo carbono

pro-telo 11x30 carbono

KEA	SAP		h (mm)	P/EU
B72141321	100089390		11	90.00 p/u

Do not use **pro-telo W** profiles in coverings which come into direct contact with water.
pro-step W profiles are supplied untreated so that the final user can choose the finishing of the step.


Profile length: 2500 mm

Minimum packaging: 10 profiles

pro-telo collection

Metal decorative profile for ceramic wall tiles. Flangeless metallic line for tiles of any thickness.

Available in a wide variety of materials, finishes and dimensions, they represent an excellent solution for the design of contemporary style ceramic settings.

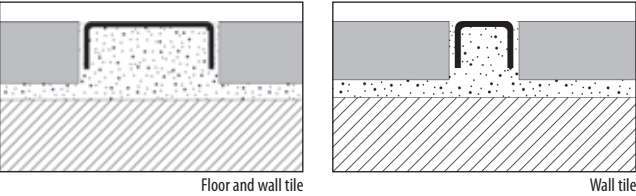

pro-telo stainless 8x40

Stainless Steel 8x40

KEA	SAP		h (mm)	P/EU
B72141110	100005299	Gloss	8	68.20 p/u
B72141210	100005306	Brushed	8	76.45 p/u

pro-telo stainless 8x25

Stainless Steel 8x25

KEA	SAP		h (mm)	P/EU
B72141101	100005293	Gloss	8	38.06 p/u
B72141201	100005300	Brushed	8	50.11 p/u
B72141356	100104652	Berlin	8	75.80 p/u
B72141320	100089391	Squared chrome	8	80.00 p/u

pro-telo stainless 8x10

KEA	SAP		h (mm)	P/EU
B72141005	100005291	Matt URBATEK	8	32.45 p/u
B72141006	100005292	Gloss URBATEK	8	31.68 p/u

pro-telo aluminium

Aluminium 8x10 gloss

KEA	SAP		h (mm)	P/EU
B72124001	100005288	Gold	10	25.99 p/u
B72124002	100005289	Silver	10	25.99 p/u

Aluminium 8x10 anodized

KEA	SAP		h (mm)	P/EU
B72122001	100005285	Gold	10	16.54 p/u
B72122002	100005286	Silver	10	16.54 p/u

pro-telo recto

Aluminium 8x10

KEA	SAP		h (mm)	P/EU
B72141318	100084015	High gloss	8	19.00 p/u
B72141348	100100729	Silver anodized	8	15.50 p/u
B72141346	100100730	Titanium	8	17.00 p/u
B72141350	100100727	Cosmos	8	19.30 p/u

Profile length: 2500 mm
pro-telo titanium profile length: 2400 mm

Minimum packaging: 10 profiles




Corner profiles and trims for wall tiles

pro-mate 2

Right angle, stainless steel profile for corners and wall and floor tile coverings.

Right angle, stainless steel profiles for trimming the non-glazed edge of the tile. Suitable for separating tiles in walls as well as in floors.



pro-mate 2

V2A Stainless steel


KEA	SAP		h (mm)	P/EU
B71342617	100126769	XLIGHT	6	21.90 p/u
B71141001	100004956		8	22.83 p/u
B71141002	100004957		10	23.93 p/u
B71141003	100004958		12.5	24.75 p/u
B71141004	100004959		15	36.04 p/u
B71141005	100004960		20	38.07 p/u

Gloss stainless steel

KEA	SAP		h (mm)	P/EU
B71142001	100004966		8	34.38 p/u
B71142002	100004967		10	35.75 p/u
B71142003	100004968		12.5	36.85 p/u
B71142004	100004969		15	44.50 p/u

V4A Stainless steel


KEA	SAP		h (mm)	P/EU
B71141008	100004963		8	25.30 p/u
B71141009	100004964		10	26.40 p/u
B71141010	100004965		12.5	29.60 p/u



pro-mate 3

Right angle profile for corners and wall and floor tile coverings. Decorative use as a metallic line.

Right angle, 3 mm thick profiles for trimming the non-glazed edge of the tile. Available in a wide variety of materials, they are also suitable for separating wall tiles.



pro-mate 3

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342608	100126772	XLIGHT	6	48.90 p/u
B71133001	100004951		8	48.90 p/u
B71133002	100004952		9	49.50 p/u
B71133003	100004953		10	50.10 p/u
B71133004	100004954		12.5	51.30 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B71342616	100126770	XLIGHT	6	10.20 p/u
B71122001	100004899		8	10.24 p/u
B71122002	100004900		9	10.50 p/u
B71122003	100004901		10	10.76 p/u
B71122004	100004902		12.5	11.55 p/u
B71122005	100004903		15	13.13 p/u

Lacquered aluminium


KEA	SAP		h (mm)	P/EU
B71342609	100126771	White XLIGHT	6	13.90 p/u
B71123001	100004909	White	8	14.18 p/u
B71123003	100004911	White	10	14.96 p/u
B71123004	100004912	White	12.5	16.28 p/u
B71123005	100004913	Beige	8	14.18 p/u
B71123007	100004915	Beige	10	14.96 p/u
B71123008	100004916	Beige	12.5	16.28 p/u
B71123009	100004917	Negro	8	14.18 p/u
B71123011	100004919	Negro	10	14.96 p/u
B71123012	100004920	Negro	12.5	16.28 p/u

Anodized aluminium gloss silver

KEA	SAP		h (mm)	P/EU
B71124003	100004925		10	22.87 p/u
B71124004	100004926		12.5	23.56 p/u



PVC

KEA	SAP		h (mm)	P/EU
B71111009	100004865	White	10	4.76 p/u
B71111017	100004873	White	12.5	5.13 p/u
B71111010	100004866	Jazmin	10	4.76 p/u
B71111018	100004874	Jazmin	12.5	5.13 p/u
B71111011	100004867	Beige	10	4.76 p/u
B71111019	100004875	Beige	12.5	5.13 p/u
B71111012	100004868	Negro	10	4.76 p/u
B71111020	100004876	Negro	12.5	5.13 p/u
B71111013	100004869	Grey	10	4.76 p/u
B71111021	100004877	Grey	12.5	5.13 p/u
B71111014	100004870	Marfil	10	4.76 p/u
B71111022	100004878	Marfil	12.5	5.13 p/u



pro-mate 5

Right angle profile for corners and wall and floor tile coverings. Decorative use as a metallic line.
Right angle and 5 mm edge profiles for trimming the non-glazed edge of the tile.
Suitable for transitions between floor coverings at the same level.

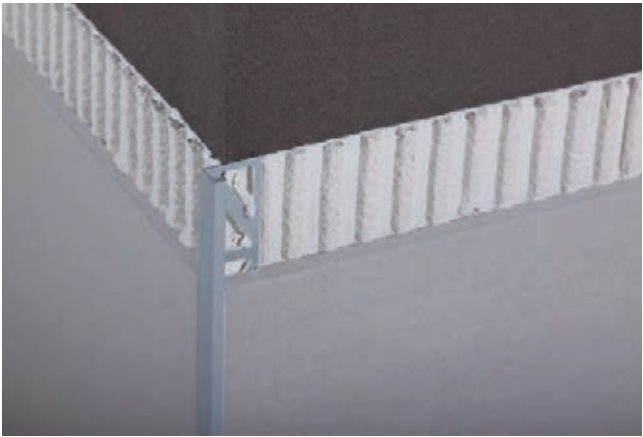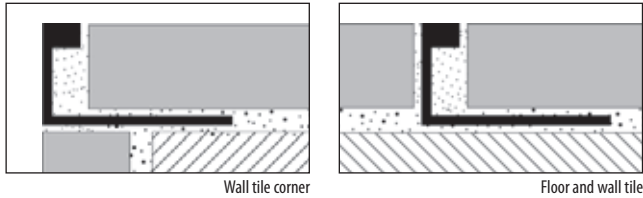

pro-mate 5

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342611	100126779	XLIGHT	7	57.00 p/u
B71132003	100004945		9	57.30 p/u
B71132004	100004946		11	59.40 p/u
B71134004	100004955		12.5	61.50 p/u

Gloss polished brass


KEA	SAP		h (mm)	P/EU
B71132002	100004944		11	44.10 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B71125003	100004927		11	16.30 p/u

pro-part Li

Decorative profile for ceramic wall tiles. Suitable for trimming corners and transitions between ceramic tiles.
Right angle, corner shaped profiles, with both sides of the same length. Specially recommended for rectified tiles corners and for tiles with relief decoration.

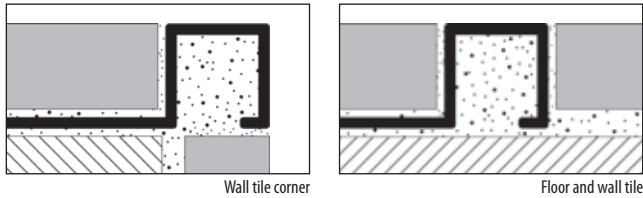

pro-part Li

Chromed brass

KEA	SAP		h (mm)	a (mm)	P/EU
B71342618	100126780	XLIGHT	4,5	5,5	60.00 p/u
B71342542	100070170		11	12	75.00 p/u
B71342543	100070171		12,5	13,5	79.00 p/u
B71342545	100073492		15	16	81.00 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	a (mm)	P/EU
B71342619	100128227	XLIGHT	4,5	5,5	14.45 p/u
B71342539	100062074		11	12	19.20 p/u
B71342537	100062086		12,5	13,5	21.00 p/u

Anodized aluminium gloss silver

KEA	SAP		a (mm)	h (mm)	P/EU
B71342535	100062072		11	10	39.50 p/u
B71342538	100062073		12,5	11,5	42.50 p/u



Chromed brass corner

KEA	SAP		h (mm)	P/EU
B72141343	100098464		11	24.60 p/u
B71342550	100085153		12,5	27.00 p/u

Anodized aluminium silver corner

KEA	SAP		h (mm)	P/EU
B71342557	100093706		11	22.60 p/u
B71342556	100093705		12,5	22.60 p/u


Anodized aluminium gloss silver corner

KEA	SAP		h (mm)	P/EU
B71342581	100102763		11	10.15 p/u
B71342580	100102762		12,5	12.35 p/u


pro-part

Decorative profile for ceramic wall tiles. Suitable for trimming corners and transitions between ceramic tiles.

Right angle, corner shaped profiles, with an 8 mm edge and a variable width edge. Excellent solution for a wide variety of ceramic installations.

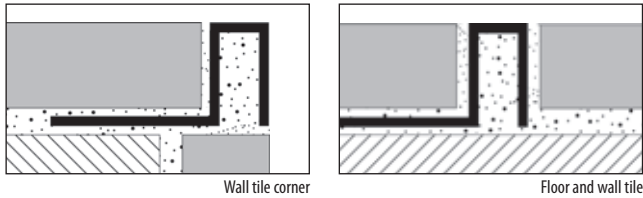

pro-part

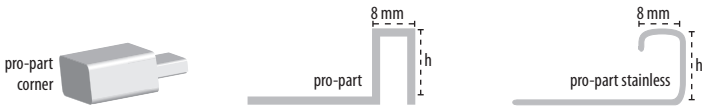

Chromed brass

KEA	SAP		h (mm)	P/EU
B73134001	100005368	XLIGHT	7	60.90 p/u
B73134002	100005369		9	63.30 p/u
B71342552	100088905		10	64.30 p/u
B73134003	100005370		11	65.70 p/u
B73134004	100005371		12.5	67.80 p/u
B73141312	100033129	Shade 2	12.5	67.80 p/u
B73134005	100005372		15	71.40 p/u
B73141319	100097895	Porcelanosa	11	68.70 p/u

Stainless steel

KEA	SAP		h (mm)	P/EU
B73141009	100005377		9	31.35 p/u
B73141010	100005378		11	33.55 p/u
B73141011	100005379		12.5	36.30 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B73122001	100005322	XLIGHT	7	14.70 p/u
B73122002	100005323		9	15.49 p/u
B73122003	100005324		11	16.28 p/u
B73122004	100005325		12.5	17.85 p/u
B73122005	100005326		15	19.43 p/u
B73122006	100005327		20	21.00 p/u
B73122007	100005328		25	21.79 p/u

Anodized aluminium gold

KEA	SAP		h (mm)	P/EU
B73122009	100005330		9	16.28 p/u
B73122010	100005331		11	17.06 p/u
B73122011	100005332		12.5	18.38 p/u
B73122014	100005335		25	22.84 p/u

Anodized aluminium gloss silver

KEA	SAP		h (mm)	P/EU
B73141317	100089004		11	58.85 p/u
B73124004	100005353		12.5	58.85 p/u

Chromed brass corner

KEA	SAP		h (mm)	P/EU
B73134301	100005373	XLIGHT	7	22.80 p/u
B73134302	100005374		9	22.80 p/u
B71342554	100091065		10	22.85 p/u
B73134303	100005375		11	22.80 p/u
B73134304	100005376		12.5	22.80 p/u
B71342541	100067718		15	24.80 p/u

Stainless steel corner


KEA	SAP		h (mm)	P/EU
B73141309	100005380		9	23.10 p/u
B73141310	100005381		11	23.10 p/u
B73141311	100005382		12.5	23.10 p/u

Anodized aluminium silver corner

KEA	SAP		h (mm)	P/EU
B73122301	100005336	XLIGHT	7	17.85 p/u
B73122302	100005337		9	17.85 p/u
B73122303	100005338		11	17.85 p/u
B73122304	100005339		12.5	17.85 p/u



pro-part



Lacquered aluminium

KEA	SAP		h (mm)	P/EU
B71342551	100088551	Negro	11	29.19 p/u
B71342547	100080530	Negro	12.5	30.24 p/u
B71342576	100100723	White	11	29.19 p/u
B71342549	100083438	White	12.5	30.24 p/u


Gloss polished brass

KEA	SAP		h (mm)	P/EU
B73132003	100005363		11	55.20 p/u
B73132004	100005364		12.5	57.00 p/u

pro-mate 45

Rounded profile for protecting wall tiles corners.

These profiles are the classic solution for protecting corners in wall tile coverings. Available in a wide variety of materials, its main feature is being shock-resistant.

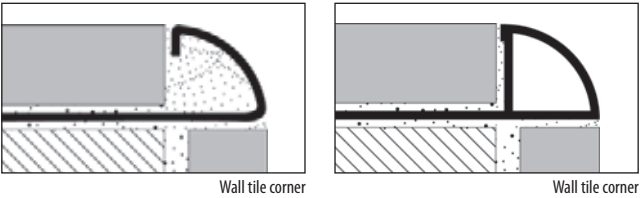

pro-mate 45 TOP

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342614	100126778	TOP XLIGHT	6	59,00 p/u
B71342565	100099965	TOP	10	60,25 p/u
B71342620	100128801	TOP	12,5	69.95 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B71342612	100126777	TOP XLIGHT	6	19,20 p/u

pro-mate 45 brass

Chromed brass

KEA	SAP		h (mm)	P/EU
B71342615	100126776	XLIGHT	6	62,00 p/u
B71342566	100099963		10	68,30 p/u
B71342567	100099964		12,5	73,00 p/u

pro-mate 45 stainless steel

Stainless steel V2A

KEA	SAP		h (mm)	P/EU
B71342613	100126775	XLIGHT	6	27,42 p/u
B71341001	100005156		8	28,33 p/u
B71341002	100005157		10	31,50 p/u
B71341003	100005158		12,5	32,73 p/u

Gloss stainless steel

KEA	SAP		h (mm)	P/EU
B71342001	100005160		8	36,30 p/u
B71342002	100005161		10	37,95 p/u
B71342003	100005162		12,5	40,15 p/u

pro-mate 45 aluminium

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B71342607	100126774	XLIGHT	6	12,10€ /u
B71322001	100005092		8	12,08 p/u
B71322003	100005094		10	13,13 p/u
B71322005	100005096		12,5	14,44 p/u

Anodized aluminium gold

KEA	SAP		h (mm)	P/EU
B71322002	100005093		8	12,08 p/u
B71322004	100005095		10	13,13 p/u
B71322006	100005097		12,5	14,44 p/u

Chromed brass corner

KEA	SAP		h (mm)	P/EU
B71342606	100125537		10	29,95 p/u

Gloss polished brass

KEA	SAP		h (mm)	P/EU
B71332003	100005155		12,5	52,50 p/u

Stainless steel corner

KEA	SAP		h (mm)	P/EU
B71341501	100005159		8	18,81 p/u

Gloss stainless steel corner

KEA	SAP		h (mm)	P/EU
B71342504	100005163		8	24,64 p/u
B71342505	100005164		10	24,64 p/u
B71342506	100005165		12,5	24,64 p/u

pro-mate 45 aluminio

Lacquered aluminium

KEA	SAP		h mm	P/EU
B71342610	100126773	White XLIGHT	6	13,90 p/u
B71323005	100005113	White	10	15,00 p/u
B71323009	100005117	White	12,5	16,25 p/u
B71323006	100005114	Beige	10	15,00 p/u
B71323010	100005118	Beige	12,5	16,25 p/u
B71323007	100005115	Pergamon	10	15,00 p/u
B71323011	100005119	Pergamon	12,5	16,25 p/u

Anodized aluminium gloss silver

KEA	SAP		h (mm)	P/EU
B71342562	100096222		10	23,89 p/u
B71342570	100100665		12,5	24,99 p/u

Anodized aluminium gloss gold

KEA	SAP		h (mm)	P/EU
B71342571	100100666		12,5	24,99 p/u

pro-mate 45 PVC gloss

PVC

KEA	SAP		h (mm)	P/EU
B71211007	100004979	White	10	7.33 p/u
B71211025	100004993	White	12.5	5.68 p/u
B71211026	100004994	Jazmín	12.5	5.68 p/u
B71211008	100004980	Marfil	10	7.33 p/u
B71211031	100004998	Marfil	12.5	5.68 p/u
B71211009	100004981	Beige	10	7.33 p/u
B71211027	100004995	Beige	12.5	5.68 p/u
B71211010	100004982	Grey	10	7.33 p/u
B71211028	100004996	Grey	12.5	5.68 p/u

Lacquered aluminium corner

KEA	SAP		h mm	P/EU
B71323505	100005142	White	10	11,70 p/u
B71323516	100005147	Beige	12,5	11,70 p/u
B71323507	100005144	Pergamon	10	11,70 p/u
B71323517	100005148	Pergamon	12,5	11,70 p/u

Anodized aluminium gloss silver corner

KEA	SAP		h (mm)	P/EU
B71342563	100096461		10	23,63 p/u

pro-mate 45 PVC matt

PVC Closed

KEA	SAP		h (mm)	P/EU
B71311010	100005084	White	10	5.32 p/u
B71311011	100005085	Jazmín	10	5.32 p/u
B71311014	100005088	Marfil	10	5.32 p/u

pro-mate 45 PVC II

PVC II

KEA	SAP		h (mm)	P/EU
B71342512	100046964	White	10	1.50 p/u
B71342510	100047009	White	12.5	1.36 p/u
B71342514	100047012	Grey	10	1.36 p/u
B71342513	100047010	Grey	12.5	1.50 p/u
B71342515	100047013	Marfil	10	1.36 p/u
B71342511	100047008	Marfil	12.5	1.50 p/u


PVC II corner

KEA	SAP		h (mm)	P/EU
B71342526	100048306	White	10	1.90 p/u
B71342531	100048566	White	12.5	7.60 p/u
B71342527	100048304	Grey	10	7.60 p/u
B71342522	100048569	Grey	12.5	7.60 p/u
B71342524	100048303	Marfil	10	7.60 p/u
B71342529	100048565	Marfil	12.5	7.60 p/u

pro-corner

Metallic profile for protecting corners.

Right angle, metallic profiles for protecting corners. Most of the pro-corner models are installed after the tile, which implies a small lip over the tile surface.

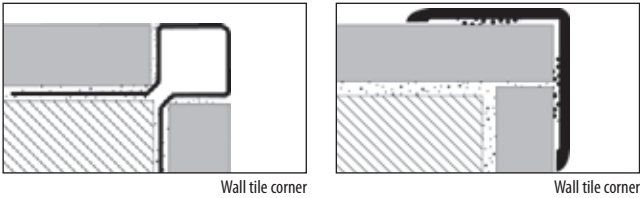

pro-corner E

Stainless steel

KEA	SAP	axb mm	h (mm)	P/EU
B78141004	100005600	8x7	8	32.73 p/u
B78141005	100005601	10x9	10	33.83 p/u
B78141006	100005602	12x10	12	38.23 p/u

Profile length: 2500 mm

pro-corner mosaic

Anodized aluminium

KEA	SAP		h (mm)	P/EU
B78141122	100092530	gloss silver	4.4	42.00 p/u
B78141123	100092529	silver	4.4	25.00 p/u

Profile length: 2700 mm

pro-corner R

Stainless steel

KEA	SAP	h (mm)	P/EU
B78141107	100005618	25	52.06 p/u
B78141109	100005620	40	77.22 p/u

Gloss stainless steel

KEA	SAP	h (mm)	P/EU
B78141112	100005623	25	52.06 p/u
B78141113	100005624	30	61.99 p/u
B78141114	100005625	40	77.22 p/u

Profile length: 2500 mm

pro-corner aluminium

pro-corner B

KEA	SAP	h (mm)	P/EU
B78122001	100005584	25	23.03 p/u
B78122003	100005586	50	36.91 p/u

Profile length: 2500 mm

Brushed stainless steel

KEA	SAP	h (mm)	P/EU
B78141117	100005628	25	52.06 p/u
B78141118	100005629	30	61.99 p/u

Longitud del perfil: 2500 mm

pro-corner angled


KEA	SAP	h (mm)	P/EU
B78122005	100005588	20	15.80 p/u
B78122006	100005589	25	14.18 p/u
B78122008	100005591	40	30.87 p/u

Profile length: 3000 mm

XLIGHT Profiles

Corner profiles for wall tiles less than 6 mm thick. Specially recommended for mosaics and large format and thin ceramic slabs, such as XLIGHT.

Available in different shapes, from right-angled profiles for straight trims to rounded shape profiles. Decorative use.

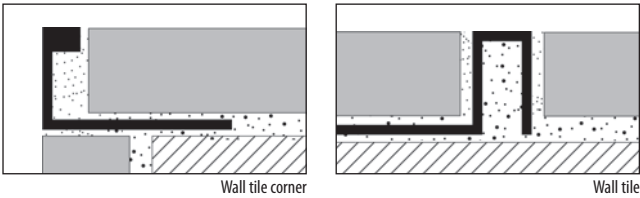

pro-mate 2

KEA	SAP		h (mm)	P/EU
B71342617	100126769	V2A stainless steel	6	21.90 p/u

pro-mate 3

KEA	SAP		h (mm)	P/EU
B71342608	100126772	chrome	6	57.00 p/u
B71342616	100126770	silver anodized	6	10.20 p/u
B71342609	100126771	white lacquer	6	13.90 p/u

pro-mate 5

KEA	SAP		h (mm)	P/EU
B71342611	100126779	XLIGHT	7	48.90 p/u

pro-part

KEA	SAP		h (mm)	P/EU
B73134001	100005368	chrome	7	60.90 p/u
B73122001	100005322	silver anodized	7	14.70 p/u

pro-part Li

KEA	SAP		h (mm)	a (mm)	P/EU
B71342618	100126780	chrome	4.5	5.5	60.00 p/u
B71342619	100128227	silver anod	4.5	5.5	14.45 p/u

pro-mate 45 TOP

KEA	SAP		h (mm)	P/EU
B71342614	100126778	chrome	6	59.00 p/u
B71342612	100126777	silver anodized	6	19.20 p/u

pro-mate 45

KEA	SAP		h (mm)	P/EU
B71342615	100126776	chrome	6	62.00 p/u
B71342607	100126774	silver anodized	6	12.10 p/u
B71342610	100126773	white lacquer	6	13.90 p/u
B71342613	100126775	V2A stainless steel	6	27.42 p/u

Profile length: 2500 mm



Minimum packaging: 10 profiles





Technical profiles

pro-T

Profile for transitions between floor coverings.

Profiles for transitions between tiles or slabs with slightly different heights. Available in two widths: 14 and 25 mm
Specially recommended for transitions between ceramic tiles and wooden floors.

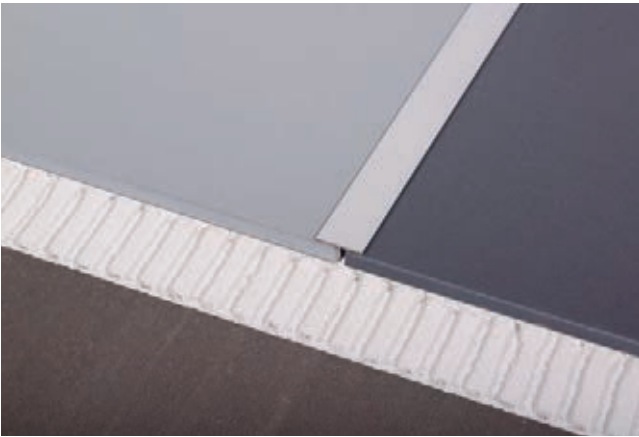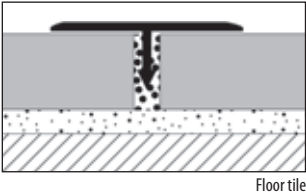

pro-T

Chromed brass

KEA	SAP	h (mm)	P/EU
B75133401	100005460	14	34.50 p/u
B75133402	100005461	25	47.40 p/u

Gloss stainless steel

KEA	SAP	h (mm)	P/EU
B75141003	100005462	14	34.08 p/u
B75141004	100005463	25	47.84 p/u

Anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B75122001	100005452	14	7.61 p/u
B75122002	100005453	25	13.91 p/u

Gloss polished brass

KEA	SAP	h (mm)	P/EU
B75132001	100005458	14	24.90 p/u
B75132002	100005459	25	37.80 p/u




Brushed stainless steel

KEA	SAP	h (mm)	P/EU
B75141005	100005464	14	49.50 p/u
B75141006	100005465	25	63.79 p/u

pro-level

Transition profile between floor coverings at different levels. It covers the non-glazed edge of the tile and protects it from shocks.

Technical profiles for small height differences between floor coverings. Available in rounded finish and sloped finish. Specially recommended for high transit floors.

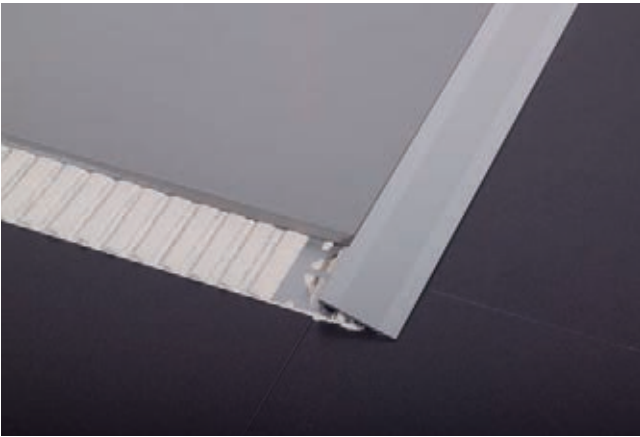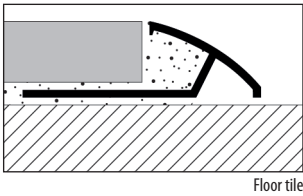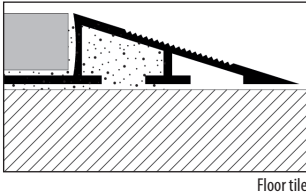


pro-level C

Anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B74122001	100005425	9	16.01 p/u
B74122002	100005426	11	18.64 p/u
B74122003	100005427	12.5	24.94 p/u

Gloss polished brass

KEA	SAP	h (mm)	P/EU
B74132004	100005435	9	63.50 p/u
B74132006	100005437	12.5	66.30 p/u



pro-level R

Anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B74122004	100005428	11	50.40 p/u
B74122005	100005429	12.5	55.39 p/u
B74122006	100005430	15	59.59 p/u
B74122007	100005431	20	65.63 p/u



pro-level M

Anodized aluminium


KEA	SAP	h (mm)	P/EU
B74132007	100120357	11	23,15 p/u



pro-dilata

Profile for movement joints in ceramic floor coverings.

PVC or metal profiles with a central elastic joint for the absorption of tensions in the ceramic floor. Available in several colours and joint widths, they are the best solution for creating intermediate movement joints.

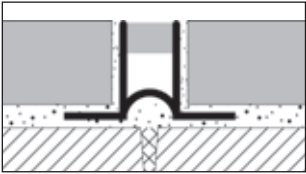

Floor tile



5-8 mm

CFL

8 mm

CFC

pro-dilata PVC

CFL 8 mm

KEA	SAP		h (mm)	P/EU
B79211058	100005685	White	12.5	14.81 p/u
B79211055	100005682	Beige	10	14.03 p/u
B79211059	100005686	Beige	12.5	14.81 p/u
B79211063	100005690	Beige	15	15.84 p/u
B79211056	100005683	Negro	10	14.03 p/u
B79211060	100005687	Negro	12.5	14.81 p/u
B79211064	100005691	Negro	15	15.84 p/u
B79211057	100005684	Grey	10	14.03 p/u
B79211061	100005688	Grey	12.5	14.81 p/u
B79211065	100005692	Grey	15	15.84 p/u

CFL 5 mm

KEA	SAP		h (mm)	P/EU
B79211067	100005694	Grey	10	12.21 p/u
B79211068	100005695	Grey	12.5	12.73 p/u

CFC 8 mm

KEA	SAP		h (mm)	P/EU
B79211037	100005673	Grey	8	6.75 p/u
B79211041	100005674	Grey	10	7.27 p/u
B79211045	100005675	Grey	12.5	7.53 p/u
B79211049	100005676	Grey	15	8.31 p/u

pro-dilata metal

CFM 8 mm stainless steel


KEA	SAP		h (mm)	P/EU
B79241089	100005713		8	69,02 p/u
B79241090	100005714		10	75,90 p/u
B79241091	100005715		12.5	82,22 p/u
B79241093	100005717		20	110,60 p/u
B79241094	100005718		25	116,32 p/u

CFM 10 mm aluminium

KEA	SAP		h (mm)	P/EU
B79221071	100005699		12.5	43,80 p/u
B79221072	100005700		15	45,94 p/u
B79221074	100005702		20	53,03 p/u



CFM stainless steel




CFM aluminium


structural joints

Profile for structural joints in ceramic floor coverings.


Metallic profiles with a central elastic joint that absorbs the structural movements of the support. Available with deformable polypropylene joint for pedestrian transit and moving metallic joint for wheeled transit.

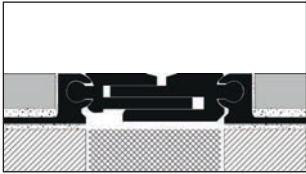

Floor tile

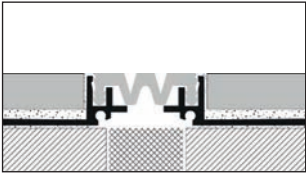

Floor tile

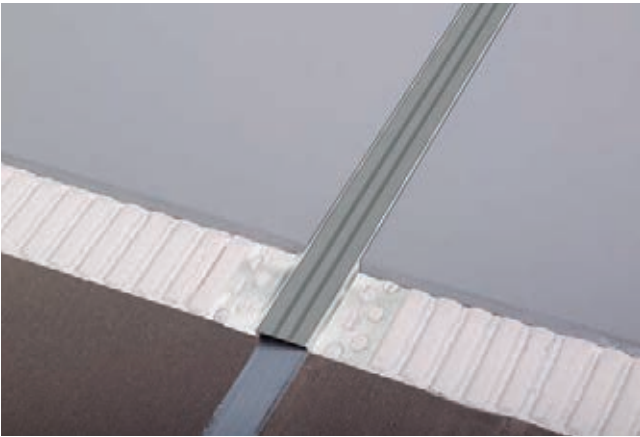

structural joints BT

BT-40

KEA	SAP		h (mm)	P/EU
B79241098	100044392	grey	18	99,95 p/ml
B79241099	100044393	grey	40	119,95 p/ml
B80106001	100005730	negro	18	99,95 p/ml
B80106003	100005732	negro	40	119,95 p/ml

structural joints AT

AT-75

KEA	SAP		h (mm)	P/EU
B80106004	100005733		18	141,15 p/ml
B79241105	100064650		35	149,23 p/ml
B80106002	100005731		50	231,16 p/ml

pro-dilata CK

CK Anodized aluminium

KEA	SAP		A (mm)	P/EU
B79241126	100140444		50	54,00 p/ud
B79241122	100140445		60	64,80 p/ud
B79241123	100140446		70	68,55 p/ud

Corner pro-dilata CK

CK Anodized aluminium



KEA	SAP		A (mm)	P/EU
B79241128	100140448		50	57,75 p/ud
B79241131	100140449		60	68,55 p/ud
B79241129	100140450		70	75,45 p/ud

40 mm

structural joint BT

75 mm


structural joint AT

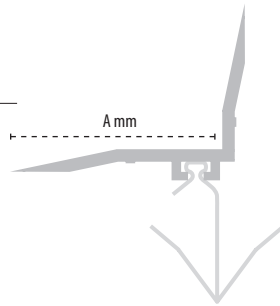

pro-step

Profile for the making of stair steps. It substitutes the traditional step ceramic piece by a combination of ceramic tile and profile.

Metallic profiles that cover the non-glazed edge of the tile, protect it from shocks and reduce the risk of slipping.

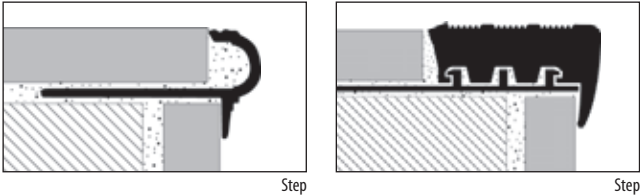

pro-step

Chromed brass M1

KEA	SAP	h (mm)	P/EU
B76334003	100005521	11	71.10 p/u

Stainless steel M2

KEA	SAP	h (mm)	P/EU
B76341001	100005522	9	45.65 p/u
B76341002	100005523	11	50.05 p/u

Anodized aluminium silver M1

KEA	SAP	h (mm)	P/EU
B76322001	100005507	7	18.00 p/u
B76322002	100005508	9	19.00 p/u
B76322003	100005509	11	20.00 p/u
B76342003	100067688	13.5	22.00 p/u

Gloss stainless steel M2

KEA	SAP	h (mm)	P/EU
B76342002	100005525	11	59.40 p/u


pro-step

PVC 25

KEA	SAP		h (mm)	P/EU
B76111026	100005493	White	11	34.03 p/u
B76111027	100005494	Beige	11	34.03 p/u
B76111028	100005495	Negro	11	34.03 p/u
B76111030	100005497	Grey	11	34.03 p/u

PVC 35



KEA	SAP		h (mm)	P/EU
B76111011	100005478	White	11	43.64 p/u
B76111013	100005480	Negro	11	43.64 p/u
B76111014	100005481	marrón	11	43.64 p/u
B76111015	100005482	Grey	11	43.64 p/u



pro-flex

Flexible profiles for curve lines in floors.

Flexible profiles are available for installation in floor and wall tiles that form curves. They can be shaped with the **pro-curve** machine.

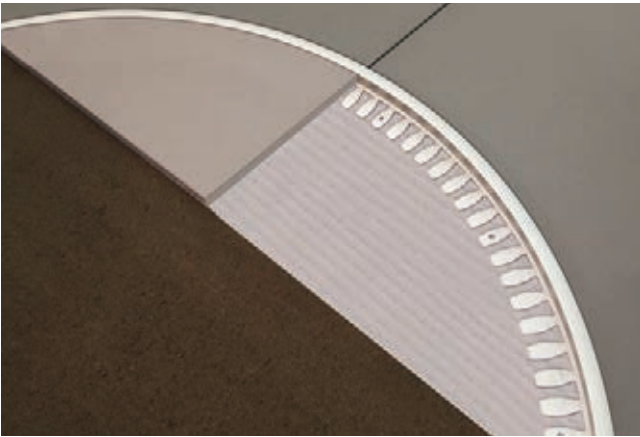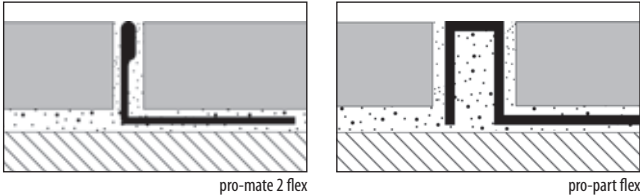

pro-flex



pro-mate 2 stainless steel V2A

KEA	SAP	h (mm)	P/EU
B71441002	100005223	10	27.23 p/u
B71441003	100005224	12.5	28.05 p/u

pro-mate 2 stainless steel gloss V2A

KEA	SAP	h (mm)	P/EU
B71442001	100005225	8	37.68 p/u
B71442002	100005226	10	39.05 p/u

pro-mate 3 anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B71422001	100005179	8	12.34 p/u
B71422002	100005180	9	12.86 p/u
B71422003	100005181	10	13.13 p/u
B71422004	100005182	12.5	13.91 p/u
B71422005	100005183	15	15.23 p/u

pro-part gloss polished brass

KEA	SAP	h (mm)	P/EU
B73232003	100005413	11	57.90 p/u

pro-part anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B73222001	100005390	7	17.06 p/u
B73222003	100005392	11	18.64 p/u
B73222004	100005393	12.5	20.21 p/u
B73222005	100005394	15	21.79 p/u
B73222006	100005395	20	23.36 p/u

pro-mate 45 anodized aluminium silver

KEA	SAP	h (mm)	P/EU
B71422106	100005194	10	15.49 p/u

pro-level C gloss polished brass

KEA	SAP	h (mm)	P/EU
B74232002	100005448	11	57.00 p/u
B74232003	100005449	12.5	69.00 p/u

pro-part anodized aluminium gold

KEA	SAP	h (mm)	P/EU
B73222011	100005400	12.5	20.74 p/u


pro-mate 45 anodized aluminium gold

KEA	SAP	h (mm)	P/EU
B71422107	100005195	10	15.49 p/u
B71422112	100005200	12.5	16.80 p/u


pro-sanit

Concave profile for installation where walls and floors meet or between wall coverings and bathtubs, shower trays or other bath elements. It substitutes the traditional curve ceramic piece.

It reduces the risk of water leakage and eases cleaning and preservation of angles between floor and wall coverings.



Bathtubs and showers trims

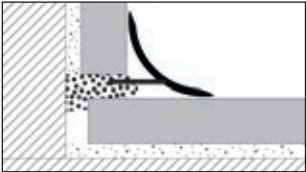

Floor covering trims



pro-sanit U1



Aluminium gloss silver

KEA	SAP		h (mm)	P/EU
B77199014	100062075		16	28.00 p/u
B77199018	100062076		22	31.95 p/u


Lacquered aluminium

KEA	SAP		h (mm)	P/EU
B77199013	100062079	White	16	16.95 p/u
B77199016	100062080	White	22	21.20 p/u

PVC

KEA	SAP		h (mm)	P/EU
B77111005	100005530	White	9	6.05 p/u
B77111008	100005533	Marfil	9	6.05 p/u

pro-sanit U2



Stainless steel

KEA	SAP		h (mm)	P/EU
B77141001	100005566	gloss	12.5	49.78 p/u
B77142001	100005569	brushed	12.5	64.41 p/u

PVC

KEA	SAP		h (mm)	P/EU
B77111013	100005538	White	9	13.41 p/u
B77111016	100005541	Marfil	9	13.41 p/u
B77111017	100005542	White	11	14.82 p/u
B77111020	100005545	Marfil	11	14.82 p/u

pro-sanit S1



PVC

KEA	SAP		h (mm)	P/EU
B77111029	100005554	White	23	6.31 p/u

pro-sanit S3



PVC

KEA	SAP		h (mm)	P/EU
B77111035	100005560	White	23	4.70 p/u

Anodized aluminium silver

KEA	SAP		h (mm)	P/EU
B77199017	100062077		16	12.10 p/u
B77199015	100062078		22	15.15 p/u

Stainless steel corner

KEA	SAP		h (mm)	P/EU
B77141501	100005567	Gloss Outer	12.5	9.35 p/u
B77141502	100005568	Gloss Inner	12.5	9.35 p/u
B77142501	100005570	Brushed outer	12.5	9.35 p/u
B77142502	100005571	Brushed internal	12.5	9.35 p/u

Side cap

KEA	SAP		h (mm)	P/EU
B77111038	100005563	White (4 u)	32	3,01 p/u

pro-plint

Metallic skirting for floor tile coverings.

Metallic profiles for skirtings. They have a high mechanical resistance with a functional, modern design. Specially recommended for office floors and raised access floors.



Floor skirting



Floor skirting



pro-plint stainless



Stainless steel

KEA	SAP		h (mm)	P/EU
B79141001	100005635	Gloss	80	32.73 p/u
B79141002	100005636	Brushed	80	45,80 p/u

pro-plint aluminium



Anodized aluminium

KEA	SAP		h (mm)	P/EU
B79141508	100073104	Silver	80	35.67 p/u

Special pieces

KEA	SAP		h (mm)	P/EU
B79141510	100073109	Profile joining piece	80	6,25 p/u
B79141511	100073107	Right trim	80	4.00 p/u
B79141512	100073108	Left trim	80	4.00 p/u

pro-plint aluminium R

Pro-plint corner

KEA	SAP		h (mm)	P/EU
B79141509	100073106	Inner	80	6.47 p/u
B79141513	100073105	Outer	80	5.35 p/u



Anodized aluminium

KEA	SAP		h (mm)	P/EU
B79123001	100005633	Base	80	43.50 p/u
B79123002	100005634	Top	80	24.70 p/u

pro-plint R consists of a base and a top profile.

Special pieces

KEA	SAP		h (mm)	P/EU
B79141507	100031428	Cap set	80	6.50 p/u

Includes right and left caps.

Pro-plint R corner

KEA	SAP		h (mm)	P/EU
B79141505	100007584	Outer	80	6.50 p/u
B79141506	100007585	Internal	80	6.50 p/u

pro-skirting

Metallic skirting for floor tile coverings.

Metal profiles in five finishes and straight trims. They replace traditional ceramic skirting. Specially recommended for shops and public buildings.



Floor skirting



pro-skirting

Chromed aluminum

KEA	SAP	h (mm)	P/EU
B79141522	100120374	60	79.95 p/u

White lacquered aluminum

KEA	SAP	h (mm)	P/EU
B79141521	100120373	60	49.75 p/u

Anodized aluminum

KEA	SAP	h (mm)	P/EU
B79141527	100126826	60	47.90 p/u

Chromed aluminum corner

KEA	SAP	h (mm)	P/EU
B79141525	100121362	60	12.80 p/u

White lacquered aluminum corner

KEA	SAP	h (mm)	P/EU
B79141524	100121361	60	10.90 p/u

Anodized aluminum corner

KEA	SAP	h (mm)	P/EU
B79141526	100126827	60	9.25 p/u





Adhesives for ceramic tile fixing

Cement-based adhesives

cerancol	59
tixocem	60
tixocem plus	61
flexitec n	62
flexitec n sp	63
one-flex n	64
one-flex n sp	65
super-flex S2	66
fr-one n	68
fr-one especial	69
rapimax n	70
maxifluid	71
super-one n	72

Reactive resins adhesive

politech n	73
------------	----

Dispersion adhesives

bt-1000 n	74
bt-3000 n	75

Additives for cement-based adhesives

unilax	76
fonolax	77

Façade fixings

concealed facade fixings	78
visible facade fixings	79

Selection tables for butech's adhesives

1. Once chosen the wall tile model, determine the type of ceramic material. Refer to the manufacturer's catalogue: PORCELANOSA, VENIS, URBATEK and L'ANTIC COLONIAL.
2. Search in the wall or floor tables, given the case, the adhesives which are compatible with the type of ceramic material chosen.

	super-one n	super-flex S2	one-flex n	fr-one n	fr-one especial	bt-1000 n	bt-3000 n	flexitec n	tixocem +	tixocem	cerancol	politech n
WALL												
Wall tile												
Large format wall tiles												
Glass mosaic												
Urbatek												
Ston-ker												
Par-ker												
Natural stone												
Water-sensitive stone												
XLIGHT			*	*	*							

	super-one n	super-flex S2	one-flex n	fr-one n	fr-one especial	rapimax n	maxifluid	flexitec n	tixocem +	tixocem	cerancol	politech n
FLOOR												
Stoneware tiles												
Porcelain tiles												
Urbatek												
Large format Urbatek												
Ston-ker												
Large format Ston-ker												
Par-ker												
Large format Par-ker												
Glass mosaic												
Natural stone												
Water-sensitive stone												
DQS	*											

3. Check which one of the compatible adhesives best matches its final use and substrate type.

SUBSTRATE / FINAL USE	Bathroom environment	Radiant heating	Outdoor floor	Façade	Pool	Mortar	Concrete	Plaster or Anhydrite	Plasterboard panels	Glazed ceramics
super-one n				*				**		
super-flex S2				*				**		
one-flex n				*				**		
fr-one n				*				**		
fr-one especial				*				**		
maxifluid								**		
rapimax n								**		
flexitec n								**		
tixocem +								**		
tixocem										
cerancol										
bt-1000 n										
bt-3000 n										
politech n										

4. Once you have chosen an adhesive which is compatible with the tile and its final use, check its features in this catalogue.

Given the wide variety of natural stones and glass mosaics from L'ANTIC COLONIAL, we recommend to check the material's scratch and stain resistance.

*: Mix with **unilax** additive.
: Prime the substrate with **uniprim

cerancol

cerancol is a cement-based adhesive, suitable for laying absorbent ceramic tiles indoors. Specially recommended for the installation of floor and wall coverings indoors, on cement-based supports.

It solves simply and effectively the laying of absorbent ceramic tiles indoors on cement-based supports. With this adhesive, tiles can be laid on a medlum-bed layer on uneven substrates. It can be laid on thicknesses up to 12 mm. Suitable for tiles laid directly on brick partition walls.



☒ wall tile

☒ floor tile

☒ floor tile
porcelain tile

☒ format
medium

☒ large format

☒ outdoor

cerancol

Features:

- Cement-based, single component adhesive.
- Optimal workability. Thixotropic.
- Application thickness up to 12 mm.
- Mixing water: 6.0 - 6.5 l per 25 kg bag

Recommended uses:

- Medium and small format wall tile coverings for indoor use.
- Medium format floor tile coverings for indoor use.
- Uneven substrates.

Coverage:

- | | |
|-------------------|-----------|
| • 20 x 30 cm tile | 3 kg / m² |
| • 30 x 30 cm tile | 3 kg / m² |
| • 30 x 60 cm tile | 4 kg / m² |
| • 44 x 44 cm tile | 4 kg / m² |

Materials:

- Medium and small format ceramic tiles.
- Ceramic tiles with a water absorption > 0.5 % as per EN-ISO 10545-3.

Certifications/Standards:

EN 12004 Annex ZA

Substrates:

- Uncovered brick partition walls.
- Cement covered floors and walls .

cerancol

KEA	SAP		P/EU
B10903003	100004218	cerancol blanco	0.31 p/kg
B10904004	100004219	cerancol gris	0.28 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,200 kg/pallet
25 kg bag	1,200 kg/pallet



Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

tixocem

tixocem is a type C1 T cement-based adhesive as per EN 12004, suitable for laying absorbent ceramic tiles using the thin-bed method, indoors and out. Its excellent conditions of use make it especially recommendable.

Single-component, high-tech adhesive for laying absorbent ceramic tiles. Excellent workability, easy to apply with extended working times. No sagging.



- ☒ wall tile
- ☒ floor tile
- ☒ floor tile
porcelain tile
- ☒ format
medium
- ☒ large format
- ☒ outdoor

tixocem

Features:

- Cement-based, single component adhesive.
- Optimal workability. Thixotropic.
- Application thickness up to 6 mm.
- Frost-resistant.
- Mixing water: 6,0 l per 25 kg bag

Recommended uses:

- Medium and small format wall tile coverings for indoor use.
- Medium format floor tile coverings for indoor and outdoor use.

Coverage:

- | | |
|-------------------|-----------------------|
| • 20 x 30 cm tile | 3 kg / m ² |
| • 30 x 30 cm tile | 3 kg / m ² |
| • 30 x 60 cm tile | 4 kg / m ² |
| • 44 x 44 cm tile | 4 kg / m ² |
| • 30 x 90 cm tile | 5 kg / m ² |
| • 44 x 66 cm tile | 5 kg / m ² |

Materials:

- Medium and small format ceramic tiles.
- Ceramic tiles with a water absorption > 3 % as per EN-ISO 10545-3.

Certifications/Standards:

EN 12004 C1 T

tixocem

KEA	SAP		P/EU
B11903003	100004220	tixocem blanco	0.35 p/kg
B11904004	100004221	tixocem gris	0.33 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,400 kg/pallet
25 kg bag	1,400 kg/pallet



tixocem plus

tixocem plus is a type C1 TE cement-based adhesive as per EN 12004, suitable for laying absorbent ceramic tiles using the thin-bed method on cement, plasterboard substrates and for laying non-absorbent ceramic tiles on cement-based substrates. Specially recommended for laying porcelain tiles indoors.

It solves simply and effectively the laying of absorbent ceramic tiles on cement-based, plasterboard or brick supports. With this adhesive, tiles can be laid on a medlum-bed layer on uneven substrates. It can be laid on thicknesses up to 10 mm. Waterproof and frost-resistant.



- ☒ wall tile
- ☒ floor tile
porcelain tile
- ☒ large format
- ☒ cardboard
plaster
- ☒ pools
- ☒ outdoor

tixocem plus

Features:

- Cement-based, single component adhesive.
- Optimal workability. Thixotropic.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 8 l per 25 kg bag

Recommended uses:

- Medium and small format wall tile coverings for indoor use.
- Medium format porcelain floor tile coverings for indoor use.
- Medium format floor tile coverings for indoor and outdoor use.
- Uneven substrates.

Coverage:

- | | |
|-------------------|-----------------------|
| • 20 x 30 cm tile | 3 kg / m ² |
| • 30 x 30 cm tile | 3 kg / m ² |
| • 30 x 60 cm tile | 4 kg / m ² |
| • 44 x 44 cm tile | 4 kg / m ² |
| • 30 x 90 cm tile | 5 kg / m ² |
| • 44 x 66 cm tile | 5 kg / m ² |

Materials:

- Medium and small format ceramic tiles.
- Absorbent and non-absorbent ceramic tiles.
- Porcelain tiles with a water absorption < 0.5 % as per EN-ISO 10545-3.

Certifications/Standards:

EN 12004 C1 TE

tixocem plus

KEA	SAP		P/EU
B11906007	100043280	tixocem plus blanco	0.43 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,200 kg/pallet



flexitec n

flexitec n is a type C2 TE cement-based adhesive, suitable for laying porcelain tiles, on cement-based substrates or flexible substrates like plasterboard. Its excellent conditions of use make it especially recommendable.

A medium-elasticity cement-based adhesive for laying absorbent ceramic tiles, stone-ware or porcelain tiles using the thin-bed method. Thixotropic.



Porcelain floor tiles

- ☒urbatek
- ☒ston-ker
- ☒large format
- ☒cardboard plaster
- ☒pools
- ☒outdoor

flexitec n

Features:

- Cement-based, single component adhesive.
- Excellent adherence. Medium flexibility.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 6 mm.
- Frost-resistant.
- Mixing water: 7.0 – 7.5 l per 25 kg bag

Recommended uses:

- Indoor wall tile coverings.
- Indoor and outdoor porcelain tile coverings.

Coverage:

- | | |
|-------------------|-----------|
| • 20 x 30 cm tile | 3 kg / m² |
| • 30 x 30 cm tile | 3 kg / m² |
| • 30 x 60 cm tile | 4 kg / m² |
| • 44 x 44 cm tile | 4 kg / m² |
| • 30 x 90 cm tile | 5 kg / m² |
| • 44 x 66 cm tile | 5 kg / m² |

Materials:

- Large format absorbent ceramic tiles.
- Medium format non-absorbent ceramic tiles.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.

Certifications/Standards:

Avis technique: CSTB 1061-222 MC 299
EN 12004 C2 TE

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- On anhydrite or plaster substrates apply **uniprim**.

flexitec n

KEA	SAP		P/EU
B12902003	100004232	flexitec n blanco	0.81 p/kg
B12901002	100004230	flexitec n gris	0.77 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



flexitec n sp

flexitec n sp is a type C2 TE high-tech adhesive as per N 12004, with minimum dust generation, for laying ceramic tiles and porcelain tiles, on the most used substrates in the building industry. It is easy to apply. Specially recommended in refurbishing jobs.

A medium-elasticity cement-based adhesive for laying absorbent ceramic tiles, stone-ware or porcelain tiles using the thin-bed method. Thixotropic.



Bath refurbishing

- ☒urbatek
- ☒ston-ker
- ☒large format
- ☒cardboard plaster
- ☒pools
- ☒outdoor

flexitec n sp

Features:

- Cement-based, single component adhesive.
- Low emission of dust and other airborne particles.
- Excellent adherence. Medium flexibility.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 6 mm.
- Frost-resistant.
- Mixing water: 7.0 – 7.25 l per 25 kg bag

Recommended uses:

- Laying of ceramics in refurbishing jobs.
- Indoor wall tile coverings.
- Indoor and outdoor porcelain tile coverings.

Coverage:

- | | |
|-------------------|-----------|
| • 20 x 30 cm tile | 3 kg / m² |
| • 30 x 30 cm tile | 3 kg / m² |
| • 30 x 60 cm tile | 4 kg / m² |
| • 44 x 44 cm tile | 4 kg / m² |
| • 30 x 90 cm tile | 5 kg / m² |
| • 44 x 66 cm tile | 5 kg / m² |

Materials:

- Large format absorbent ceramic tiles.
- Medium format non-absorbent ceramic tiles.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.

Certifications/Standards:

EN 12004 C2 TE

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- On anhydrite or plaster substrates apply **uniprim**.

flexitec n sp

KEA	SAP		P/EU
B12600001	100061977	flexitec n blanco sp	0.89 p/kg
B12600002	100061981	flexitec n gris sp	0.85 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



one-flex n

one flex n is a type C2 TE S1 high-performance cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on the most used substrates in the building industry.

Advanced, high-performance adhesive, with an excellent adherence and flexibility, suitable for the most difficult installations, like high traffic floors, radiant heating floors or facades. Its performance and ease of application make it the ideal solution for the most demanding professionals. Specially recommended for laying rectified tiles.



- ☒ston-ker
- ☒glass mosaic
- ☒large format
- ☒cardboard plaster
- ☒high traffic
- ☒pools

one-flex n

Features:

- Cement-based, single component adhesive.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 6 mm.
- Frost-resistant.

Mixing water: white: 8.25 - 8.75 l per 25 kg bag
grey: 7.75 - 8.25 l per 25 kg bag

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²
• 30 x 90 cm tile	5 kg / m²
• 44 x 66 cm tile	5 kg / m²
• 60 x 60 cm tile	6 kg / m²
• 60 x 120 cm tile	6 kg / m²

Certifications/Standards:

Avis technique: CSTB 1061-222 MC 300
EN 12004 C2 TE S1

one-flex n

KEA	SAP		P/EU
B12903004	100004234	one-flex n blanco	0.99 p/kg
B12904005	100004236	one-flex n gris	0.92 p/kg

Recommended uses:

- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with **unilax** additive.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Existing wall tiles.
- On anhydrite or plaster substrates apply **uniprim**.

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



one-flex n sp

one flex n sp is a type C2 TE S1 high-performance no dust cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on the most used substrates in the building industry. It generates a minimum amount of dust.

Advanced, high-performance adhesive, with an excellent adherence and flexibility, suitable for the most difficult installations, like high traffic floors, radiant heating floors or facades. Its performance and ease of application make it the ideal solution for the most demanding professionals. Specially recommended for laying rectified tiles.



- ☒ston-ker
- ☒mosaic mosaic
- ☒large format
- ☒cardboard plaster
- ☒ceramics existing
- ☒pools

one-flex n sp

Features:

- Cement-based, single component adhesive.
- Low emission of dust and other airborne particles.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 6 mm.
- Frost-resistant.

Mixing water: 7.5 l per 25 kg bag

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²
• 30 x 90 cm tile	5 kg / m²
• 44 x 66 cm tile	5 kg / m²
• 60 x 60 cm tile	6 kg / m²
• 60 x 120 cm tile	6 kg / m²

Certifications/Standards:

EN 12004 C2 TE S1

one-flex n sp

KEA	SAP		P/EU
B12909013	100061979	one-flex n blanco sp	1.15 p/kg
B12909012	100061980	one-flex n gris sp	1.06 p/kg

Recommended uses:

- Laying of ceramics in refurbishing jobs.
- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with **unilax** additive.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Existing wall tiles.
- On anhydrite or plaster substrates apply **uniprim**.

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



super-flex S2

super-flex S2 is a type C2 TE S2 high-performance no dust cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on the most used substrates in the building industry. Specially recommended for laying large format, thin porcelain tiles like XLIGHT from URBATEK.

This adhesive features excellent performance in adherence and deformability with no need for mixing with additives and excellent conditions of use: low dust generation and an only 15 kg package. This state-of-the-art adhesive includes additives and polymers which increase performance. This means that with a 15 kg bag of super-flex S2 you can lay the same tiles surface than with a 25 kg bag of regular adhesive.



ston-ker



XLIGHT



glass
mosaic



large format



existing
ceramics



high traffic

super-flex S2

Features:

- Cement-based, single component adhesive.
- Lightened adhesive. Low consumption onsite.
- Low emission of dust and other airborne particles.
- Maximum adherence and deformability.
- High initial adherence and no sagging. Thixotropic.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 8 l per 15 kg bag

Recommended uses:

- Indoor coverings with ceramic sheets like XLIGHT.
- Laying of ceramics in refurbishing jobs.
- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.

Coverage:

- | | |
|--------------------|--------------------------|
| • 20 x 30 cm tile | 2.00 kg / m ² |
| • 30 x 30 cm tile | 2.00 kg / m ² |
| • 30 x 60 cm tile | 2.50 kg / m ² |
| • 44 x 44 cm tile | 2.50 kg / m ² |
| • 30 x 90 cm tile | 3.00 kg / m ² |
| • 44 x 66 cm tile | 3.00 kg / m ² |
| • 60 x 60 cm tile | 3.56 kg / m ² |
| • 60 x 120 cm tile | 3.50 kg / m ² |

Materials:

- Large format ceramics.
- Porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Large format, thin porcelain tiles like XLIGHT.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- DQS slabs and other kinds of marble agglomerate.

Certifications/Standards:

EN 12004 C2 TE S2

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Existing wall tiles.
- On anhydrite or plaster substrates apply **uniprim**.

Super-flex S2

KEA	SAP	P/EU
B12909017	100142757	super-flex S2 white
		2,47 p/kg

Packaging

Presentation	Europallet
15 kg bag	1000 kg/pallet



fr-one n

fr-one n is a type C2 TE high-tech cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on the most used substrates in the building industry. Specially recommended for large format tiles and uneven substrates.

Advanced, high-performance, single-component, easy to use adhesive for laying all kinds of ceramic tiles. With this adhesive, tiles can be laid on a medium-bed layer on uneven substrates. It can be laid on thicknesses up to 15 mm. Specially recommended for porcelain floor tiles, antiqued marble, large formats and pools. Thixotropic.



- urbatek
- ston-ker
- large format
- cardboard plaster
- pools
- outdoor

fr-one n

Features:

- Cement-based, single component adhesive.
- Excellent adherence.
- Optimal workability. Extended working times. Open time higher than 30 min.
- High initial adherence and no sagging.
- Application thickness up to 15 mm.
- Frost-resistant.
- Mixing water: 7.25 - 7.75 l per 25 kg bag

Recommended uses:

- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- Uneven substrates.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with **unilax** additive.

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²
• 30 x 90 cm tile	5 kg / m²
• 44 x 66 cm tile	5 kg / m²
• 60 x 60 cm tile	6 kg / m²
• 60 x 120 cm tile	6 kg / m²

Certifications/Standards:

Avis technique: CSTB 1058-221 MC 301
EN 12004 C2 TE

fr-one n

KEA	SAP		P/EU
B12906008	100004241	fr-one n blanco	0.92 p/kg
B12907009	100004244	fr-one n gris	0.86 p/kg

Materials:

- Large format ceramics.
- Porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Existing wall tiles.
- On anhydrite or plaster substrates apply **uniprim**.

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



fr-one especial

fr-one especial is a type C2 TE cement-based adhesive, as per EN 12004, highly resistant to sulfates, for laying all kinds of ceramic tiles on the most used substrates in the building industry. Excellent workability.

Advanced, high-performance, single-component, easy to use adhesive for laying all kinds of ceramic tiles. Specially recommended for plaster or anhydrite substrates without the need for previous priming.



- ston-ker
- mosaic mosaic
- large format
- untiled floor anhydrite
- plaster board
- plastered wall

fr-one especial

Features:

- Cement-based, single component adhesive.
- Resistant to sulfates. Suitable for plaster or anhydrite substrates without the need for priming.
- Excellent adherence.
- Optimal workability. Extended working times. Open time higher than 30 min.
- High initial adherence and no sagging.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 8.0 - 8.25 l per 25 kg bag

Recommended uses:

- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with **unilax** additive.

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²
• 30 x 90 cm tile	5 kg / m²
• 44 x 66 cm tile	5 kg / m²
• 60 x 60 cm tile	6 kg / m²
• 60 x 120 cm tile	6 kg / m²

Certifications/Standards:

EN 12004 C2 TE

fr-one especial

KEA	SAP		P/EU
B12909015	100079263	fr-one especial blanco	1.18 p/kg

Materials:

- Large format ceramics.
- Porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Anhydrite floors.
- Plasterboards and plastered walls.
- Cement covered floors and walls .
- Concrete floors and slabs.
- Plasterboards.
- Existing wall tiles.

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet



rapimax n

rapimax n is a type C2 TE high-tech cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on floors. Its high wettability and fluidity ensure full coverage of the underside of tiles without having to resort to the floating and buttering method .

A high-performance fluid adhesive for laying void-free ceramic floors. Specially recommended for porcelain floor tiles, terracotta and large formats. Indoors and outdoors.



- ☒ floor tile
- ☒ wall
- ☒ ston-ker
- ☒ large format
- ☒ high traffic
- ☒ pools

rapimax n

Features:

- Cement-based, single component adhesive.
- A fluid mortar, applicable with a notched trowel, that under the tile pressure, flows and covers the whole back of the tile.
- Excellent adherence.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 5.0 - 5.5 l per 25 kg bag

Recommended uses:

- Indoor and outdoor porcelain tile coverings.
- Large format porcelain floors.
- High traffic floor tiles.
- Floor tiles with radiant heating.
- Laying of tiles on glazed floor tiles.
- Never use in walls.

Coverage:

- | | |
|--------------------|-----------|
| • 30 x 30 cm tile | 4 kg / m² |
| • 44 x 44 cm tile | 5 kg / m² |
| • 44 x 66 cm tile | 5 kg / m² |
| • 60 x 60 cm tile | 6 kg / m² |
| • 60 x 120 cm tile | 6 kg / m² |

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Clay and terracotta.
- Natural stone and marble not prone to staining.

Certifications/Standards:

EN 12004 C2 E

Substrates:

- Cement covered floors.
- Concrete covered floors.
- Existing floor tiles.
- On anhydrite or plaster floors apply **uniprim**.

rapimax n

KEA	SAP	P/EU
B12905006	100004238	rapimax n gris 0.87 p/kg

Packaging


Presentation	Europallet
25 kg bag	1,000 kg/pallet



maxifluid

maxifluid is a type C2 TE high-performance cement-based adhesive, as per EN 12004, for laying all kinds of ceramic tiles on floors. Its high wettability and fluidity ensure full coverage of the underside of tiles without having to resort to the floating and buttering method .

A high-performance fluid, flexible adhesive for laying void-free ceramic floors. Specially recommended for porcelain floor tiles, terracotta and large formats. Indoors and outdoors.

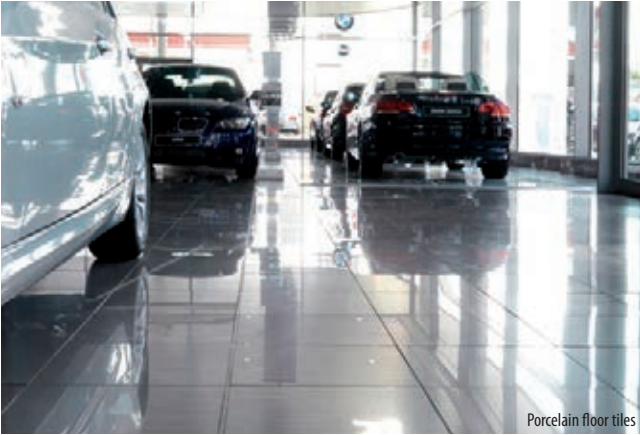

- ☒ floor tile
- ☒ wall
- ☒ ston-ker
- ☒ large format
- ☒ high traffic
- ☒ radiant heating

maxifluid

Features:

- Cement-based, single component adhesive.
- A fluid mortar, applicable with a notched trowel, that under the tile pressure, flows and covers the whole back of the tile.
- Excellent adherence.
- Flexible.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 5.0 - 5.5 l per 25 kg bag

Recommended uses:

- Indoor and outdoor porcelain tile coverings.
- Large format porcelain floors.
- High traffic floor tiles.
- Floor tiles with radiant heating.
- Laying of tiles on glazed floor tiles.
- Never use for wall tiles.

Coverage:

- | | |
|--------------------|-----------|
| • 30 x 30 cm tile | 4 kg / m² |
| • 44 x 44 cm tile | 5 kg / m² |
| • 44 x 66 cm tile | 5 kg / m² |
| • 60 x 60 cm tile | 6 kg / m² |
| • 60 x 120 cm tile | 6 kg / m² |

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Clay and terracotta.
- Natural stone and marble not prone to staining.

Certifications/Standards:

EN 12004 C2 E S1

Substrates:

- Cement covered floors.
- Concrete covered floors.
- Existing floor tiles.
- On anhydrite or plaster floors apply **uniprim**.

maxifluid

KEA	SAP	P/EU
B11906008	100033113	maxifluid gris 0.90 p/kg

Packaging

Presentation	Europallet
25 kg bag	1,000 kg/pallet



super-one n

super-one n is a type C2 FTE S1 high-performance cement-based adhesive, as per EN 12004, ready for traffic after 4 hours. Specially recommended for quick installation and use of ceramic tiles and natural stone.

It solves the need of quick installation of any kind of format and ceramic tile, including porcelain tiles. Ready for traffic in just 4 hours, this adhesive can be used to lay ceramic tiles and natural stone in environments where high mechanical performance is needed, such as commercial or industrial flooring or flooring with radiant heating. Waterproof and frost-resistant.



- ☒ston-ker
- ☒natural stone
- ☒large format
- ☒cardboard plaster
- ☒ceramics existing
- ☒traffic after 4 hours

super-one n

Features:

- Cement-based, single component adhesive.
- Ready for traffic in just 4 hours.
- Excellent adherence. Flexible.
- Fine texture mortar, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 10 mm.
- Frost-resistant.
- Mixing water: 6.0 - 6.50 l per 25 kg bag

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²
• 30 x 90 cm tile	5 kg / m²
• 44 x 66 cm tile	5 kg / m²
• 60 x 60 cm tile	6 kg / m²
• 60 x 120 cm tile	6 kg / m²

Certifications/Standards:

Avis technique: CSTB 1092-228 MC 312
EN 12004 C2 FTE S1

super-one n

KEA	SAP		P/EU
B12909010	100031188	super-one n blanco	1.42 p/kg
B12909011	100031189	super-one n gris	0.97 p/kg

Recommended uses:

- Laying of ceramics in refurbishing jobs.
- Indoor large format ceramic tile coverings.
- Indoor and outdoor porcelain tile coverings.
- Plywood substrates.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- On bonded facades, replace mixing water with **unilax** additive.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stones and marble without risk of deformation by water absorption.
- In installations of DQS slabs and other kinds of marble agglomerate, mix with **unilax** latex.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- On **fonopac r** replace mixing water with **fonolax**.
- Existing wall tiles.
- On anhydrite or plaster substrates apply **uniprim**.

Packaging


Presentation	Europallet
25 kg bag	1,000 kg/pallet
25 kg bag	1,000 kg/pallet



politech n

politech is a type R2 T high-tech, two-component polyurethane adhesive as per EN 12004, for laying tiles on deformable substrates. Specially recommended for special substrates like metal sheets or synthetic materials, where cement-based adhesives cannot be used.

A high-tech two-component polyurethane adhesive with high performance properties. Suitable for laying ceramic tiles of all kinds on deformable substrates.

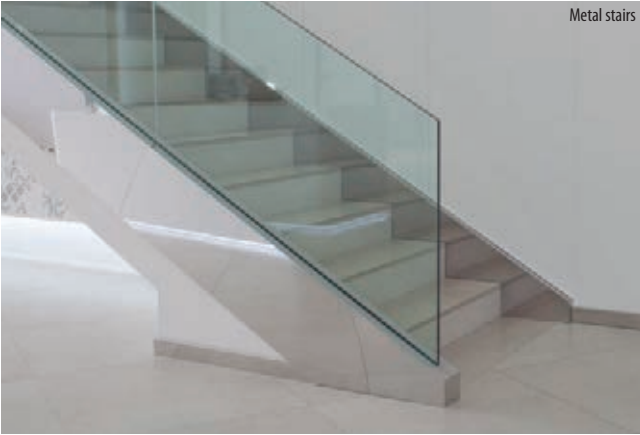

- ☒ston-ker
- ☒large format
- ☒wood
- ☒metal
- ☒PVC
- ☒waterproof

politech n

Features:

- Two-component polyurethane adhesive.
- Excellent adherence. Maximum deformability.
- No water absorption. Waterproof.
- High chemical resistance.
- High initial adherence and no sagging.
- Application thickness up to 8 mm.
- Frost-resistant.

Coverage:

• 20 x 30 cm tile	3 kg / m²
• 30 x 30 cm tile	3 kg / m²
• 30 x 60 cm tile	4 kg / m²
• 44 x 44 cm tile	4 kg / m²

Certifications/Standards:

EN 12004 R2 T

politech n

KEA	SAP		P/EU
B41061005	100138260	politech n blanco	7.26 p/kg

Recommended uses:

- Laying of wall tiles not compatible with cement-based adhesives.
- Wall tiles on substrates not compatible with cement-based adhesives.
- Floor tiles on deformable substrates.
- Floor tiles with special chemical resistance.
- Laying of slate and other natural stones with risk of deformation by water absorption.
- Substrate waterproofing.

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- DQS slabs and other kinds of marble agglomerate.
- Krypton slabs and other kinds of Solid Surface.

Substrates:

- Concrete or mortar substrates.
- Plasterboards and plaster or anhydrite walls.
- Plasterboards/wood boards.
- Existing wall tiles.
- Metal sheets.
- Polyester or PVC surfaces.

Packaging

Presentation	Europallet
12 kg can	576 kg/pallet



bt-1000 n

bt-1000 n is a type D1 TE dispersion adhesive, as per EN 12004, for laying all kinds of ceramic tiles on indoor walls. This adhesive is served ready-to-use and does not need any water or additives.

A top-quality ready-to-use adhesive formulated with synthetic resins for laying all kinds of ceramic tiles on indoor walls. Specially recommended for installation on plasterboard substrates.



- ☒ floor tile
- ☒ wall
- ☒ floor tile
porcelain tile
- ☐ large format
- ☐ bathroom
environments
- ☐ outdoor

bt-1000 n

Features:

- Ready-to-use dispersion adhesive.
- Excellent adherence. Flexible.
- Fine texture adhesive, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 4 mm.

Recommended uses:

- Wall tile on dry partition wall: plasterboard.
- Wall tile on plaster.
- Indoor ceramic tile coverings.
- Indoor decoration with ceramics: bath or kitchen countertops.
- Do not use in highly damp environments or wall tiles into direct contact with water.
- Never use for floor tiles.

Coverage:

- | | |
|-------------------|-----------------------|
| • 20 x 20 cm tile | 3 kg / m ² |
| • 20 x 30 cm tile | 3 kg / m ² |
| • 30 x 60 cm tile | 4 kg / m ² |

Materials:

- Medium and small format ceramic tiles or slabs.
- Small format porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Isolating panels:
 - EPS panels.
 - PS panels.
 - Mineral wool panels.

Certifications/Standards:

EN 12004 D1 TE

Substrates:

- Cement screed.
- Plasterboards and plaster or anhydrite walls.
- Plasterboards.
- Plywood boards.
- Existing wall tiles.*

Packaging

Presentation	Europallet
25 kg can	600 kg/pallet



* Existing wall tiles, provided the new tile has a water absorption >10% as per EN-ISO 10545-3.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

bt-3000 n

bt-3000n is a type D2 TE dispersion adhesive, as per EN 12004, for laying all kinds of ceramic tiles on indoor walls. This adhesive is served ready-to-use and does not need any water or additives. Specially recommended for installation on plasterboard substrates, even in highly damp environments or wall tiles into direct contact with water.

A flexible ready-to-use adhesive paste. Suitable for laying all types of indoor ceramic tiles. Specially recommended in damp areas.



- ☐ floor tile
- ☒ wall
- ☒ floor tile
porcelain tile
- ☐ large format
- ☒ bathroom
environments
- ☐ outdoor

bt-3000 n

Features:

- Ready-to-use dispersion adhesive.
- Excellent adherence. Flexible.
- Resistant to dampness-
- Fine texture adhesive, with excellent mixing and application features.
- High initial adherence and no sagging.
- Extended working times. Open time higher than 30 min.
- Application thickness up to 4 mm.

Recommended uses:

- Wall tile on dry partition wall: plasterboard.
- Wall tile on plaster.
- Indoor ceramic tile coverings.
- Indoor wall tiles in permanently damp environments.
- Indoor decoration with ceramics: bath or kitchen countertops.
- Never use for floor tiles.

Coverage:

- | | |
|-------------------|-----------------------|
| • 20 x 20 cm tile | 3 kg / m ² |
| • 20 x 30 cm tile | 3 kg / m ² |
| • 30 x 60 cm tile | 4 kg / m ² |

Materials:

- Medium and small format ceramic tiles or slabs.
- Small format porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Glass mosaic.
- Isolating panels:
 - EPS panels.
 - PS panels.
 - Mineral wool panels.

Certifications/Standards:

EN 12004 D2 TE
Certifié CSTB Certified 84 AD 281: D2E

Substrates:

- Cement screed.
- Plasterboards and plaster or anhydrite walls.
- Plasterboards.
- Plywood boards.
- Existing wall tiles.*

bt-3000 n

KEA	SAP	P/EU
B13903003	100031163	bt-3000 n 1.61 p/kg

Packaging

Presentation	Europallet
25 kg can	600 kg/pallet




* Existing wall tiles, provided the new tile has a water absorption >10% as per EN-ISO 10545-3.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

unilax

unilax is a latex that, mixed with cement-based adhesives like **one-flex n**, **fr-one n** or **super one n**, **rapimax n** or **maxifluid** improves bonding strength and flexibility up to level C2 S2 as per EN 12004. Specially recommended for laying wall tiles outdoors.

A resin-based latex that can be added to cement-based adhesives to enhance their bonding strength and flexibility. Specially recommended for exterior facades.

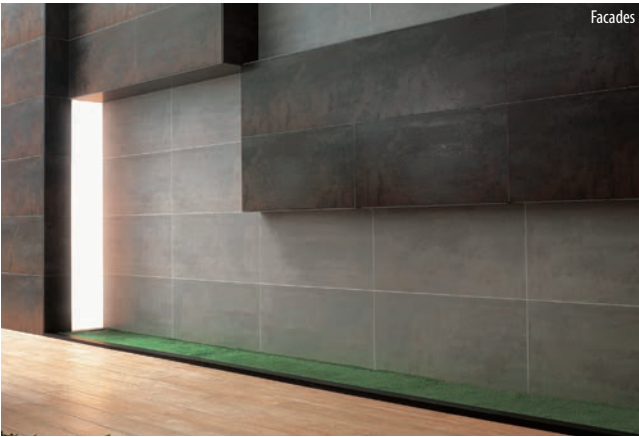

unilax

Features:

- Water-based acrylic resins latex.
- Resistant to the most common chemicals.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Recommended uses:

- Laying of tiles in facades.
- Large format ceramic floor tiles on radiant heating.
- Indoor large format ceramic tile coverings on slightly deformable substrates.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Pools and damp environments.

Coverage:

Product	%	litres	Kg/bag
one flex n blanco	34%	8.25–8.75	25
one flex n gris	32%	7.75-8.25	25
fr-one n	30%	7.25-7.75	25
super-one n	25%	6.00-6.50	25
rapimax n	21%	5.00-5.50	25
maxifluid	21%	5.00-5.50	25

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- DQS slabs and other kinds of marble agglomerate.

Substrates:

- Concrete or mortar substrates.
- Plasterboards.
- Plywood panels.
- Existing wall tiles.

unilax

KEA	SAP		P/EU
B51601002	100004376	unilax	3.64 p/kg
B51602002	100004377	unilax	4.16 p/kg

Packaging

Presentation	Europallet
20 kg can	560 kg/pallet
5 kg can	480 kg/pallet



fonolax

fonolax is a latex that, mixed with cement-based adhesives **one-flex n**, **fr-one n**, **super one n**, **rapimax n** or **maxifluid**, improves bonding strength and flexibility up to level C2 S2 as per EN 12004. Specially recommended for laying ceramic tiles directly on soundproofing sheets.

An additive of synthetic resins that replaces the water in the mix and adds increased flexibility. Specially recommended as additive for the **super-one** adhesive in the installation of the **fonopac r** soundproofing.



fonolax

Features:

- Water-based acrylic resins latex.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Recommended uses:

- Floor tiles on soundproofing against impact noise.
- Large format ceramic floor tiles on radiant heating.
- Indoor large format ceramic tile coverings on deformable substrates.
- Indoor and outdoor porcelain tile coverings.
- High traffic floor tiles.
- Pools and damp environments.

Coverage:

Product	%	liters	Kg/bag
one flex n blanco	34%	8.25–8.75	25
one flex n gris	32%	7.75-8.25	25
fr-one n	30%	7.25-7.75	25
super-one n	25%	6.00-6.50	25
rapimax n	21%	5.00-5.50	25
maxifluid	21%	5.00-5.50	25

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Soundproofing sheets:
 - **fonopac r**
 - **fonopac r Eco**
- Cement covered floors and walls .

fonolax

KEA	SAP		P/EU
B52602001	100004388	fonolax	1.71 p/kg
B52502001	100004385	fonolax	2.18 p/kg

Packaging

Presentation	Europallet
20 kg can	560 kg/pallet
5 kg can	480 kg/pallet




concealed facade fixings

Innovative concealed fixing clip for ceramic tiles in **bonded facades**. The fixings fit within small slots done on the porcelain piece and are anchored to the support by a stainless steel screw. Once the joints are grouted, the fixings are not visible anymore, not affecting the facade design.

These fixings have been designed as a security element in porcelain tile walls installed by the thin layer, double bonding method. We recommend the use of type C2 S2 cement-based adhesives as per EN 12004.

As a general rule, we recommend this kind of fixing from a height corresponding to first concrete slab. In any case, standards in force must be observed for every project.

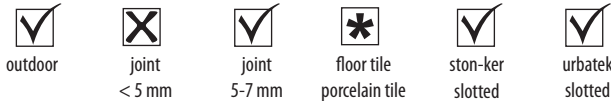

concealed facade fixings

Features:

- 1.4301 (AISI 304 V2A) stainless steel clips.
- Suitable for 5 - 7 mm wide joints.
- Suitable for tiles 9 to 12 mm thick.
- Start fixings available in 80 and 160 mm lengths for overhanging installations.
- Includes stainless steel screw and plug.

Recommended uses:

- Laying of tiles in facades.
- Laying of ceramics in ceilings and cornices.
- Indoor laying of large format porcelain tiles at a certain height.

Coverage:

Coverage changes with every facade design. In the case of a regular facade with no gaps, clip calculation would be the following:

Tile	Type I fixings	Type A/T fixings
cm	u/m ²	u/m ²
43.5 x 65.9	5.6	1.4
44 x 66	5.5	1.4
60 x 60	4.5	1.1
45 x 90	4.0	1.0
60 x 120	3.4	0.8

Additional materials:

fr-one gris n	6.00 – 7.00	kg/m ²
unilax	1,80 – 2,45	l/m ²
unicem	1.25 – 1.75	kg/m ²

concealed facade fixings

KEA	SAP	concealed fixing	P/EU
B80111001	100005743	minimum I joint	1.39 p/u


KEA	SAP	concealed fixing	P/EU
B80111002	100005744	minimum A/T joint 4 cm	1.39 p/u
B80111003	100005745	minimum A/T joint 8cm	1.56 p/u
B80400012	100032736	minimum A/T joint 16cm	5.00 p/u

Screws and plugs included

Packaging

Presentation
50 u. bag

Presentation
50 u. bag
50 u. bag
50 u. bag

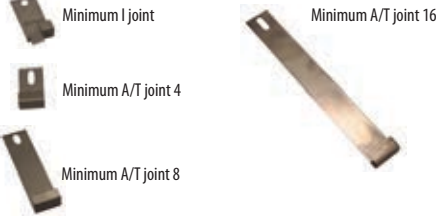


Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet. For further information on additional materials refer to the corresponding page in this catalogue.

visible facade fixings

Visible fixing clip for ceramic tiles in **bonded facades**. Fixings hold the ceramic tiles and are anchored to the support by a stainless steel screw. Once the joints are grouted, the fixings are visible, and a 5 mm clip can be seen.

These fixings have been designed as a security element in porcelain tile walls installed by the thin layer, double bonding method. We recommend the use of type C2 S2 cement-based adhesives as per EN 12004.

As a general rule, we recommend this kind of fixing from a height corresponding to first concrete slab. In any case, standards in force must be observed for every project.

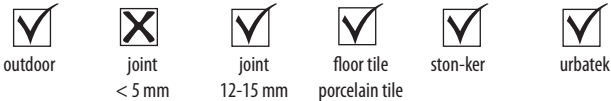

visible facade fixings

Features:

- 1.4301 (AISI 304 V2A) stainless steel clips.
- Suitable for 12 mm wide joints.
- Suitable for tiles 10 to 12 mm thick.
- Available in metallic or lacquered finish.
- Customizable color lacquering on demand.
- Includes stainless steel screw and plug.

Recommended uses:

- Laying of tiles in facades.
- Laying of ceramics in ceilings and cornices.
- Indoor laying of large format porcelain tiles at a certain height.

Coverage:

Coverage changes with every facade design. In the case of a 5 x 20 m regular facade with no gaps, clip calculation would be the following:

Tile	100 fixing	1100 fixing	1200 fixing	1500 fixing
cm	u/m ²	u/m ²	u/m ²	u/m ²
43.5 x 65.9	0.04	0.58	0.22	3.19
44 x 66	0.04	0.58	0.22	3.19
60 x 60	0.04	0.64	0.16	2.56
45 x 90	0.04	0.42	0.20	2.10
60 x 120	0.38	0.32	1.52	1.28

Additional materials:

fr-one gris n	6,00 – 7,00	kg/m ²
unilax	1,80 – 2,10	l/m ²
unicem	1,80 – 2,15	kg/m ²

visible facade fixings

KEA	SAP	fixing clip stainless	P/EU
B80107010	100005737	ref. 1000	1.39 p/u
B80107011	100005738	ref. 1100	2.49 p/u
B80107012	100005739	ref. 1200	1.39 p/u
B80107013	100005740	ref. 1500	1.87 p/u

KEA	SAP	fixing clip lac. black	P/EU
B80400008	100008056	ref. 1000	1.50 p/u
B80400005	100008057	ref. 1100	2.60 p/u
B80400007	100008058	ref. 1200	1.50 p/u
B80400006	100008059	ref. 1500	1.98 p/u

Screws and plugs included

Materials:

- Medium and large format porcelain tiles:
 - STON-KER
 - PAR-KER
 - URBATEK

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- In outdoor cement screeds, we recommend to add **unicem**:
150 gr **unicem** / m² and milimeter of screed thickness.

Packaging

Presentation
50 u. bag
50 u. bag
50 u. bag
50 u. bag

Presentation
50 u. bag
50 u. bag
50 u. bag
50 u. bag



Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet. For further information on additional materials refer to the corresponding page in this catalogue.



Grouting material and elastic sealants

Cement-based materials for tile joints

colorstuk 0-4	82
colorstuk 2-12	84
colorstuk especial n	86
colorstuk rapid n	88

Epoxy grouting materials

epotech aqua	90
epotech crystal	91
epotech gold & silver	92
epotech	94

Leveling system for ceramic tiles

Self-leveling spacers	96
-----------------------	----

Elastic joint sealants

s-107	98
s-107 n	99
p-404	100

Additive for grouting material

cl-stuk	101
---------	-----

colorstuk 0-4

colorstuk 0-4 is a type CG 2 fine grain grouting material as per EN 13888, for grouting joints up to 4 mm. It is easy to apply, resistant and color stable, and it is specially recommended for rectified tiles.

A high-tech, fine grained colored mortar for grouting tile joints from 0 to 4 mm. Suitable for all kinds of ceramic tiles and natural stone. Indoors and outdoors.



glass
mosaic



rectified
ceramics



indoors



high
traffic



pools



radiant
heating

colorstuk 0-4

Features:

- Cement-based, single-component, colored mortar.
- Fine texture mortar for grouting tile joints up to 4 mm.
- Easy to apply and clean.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Wide color range.
- Mixing water:
 - colorstuk 0-4 n white 1,7 l per 5 kg bag.
 - colorstuk 0-4 n white 8,5 l per 25 kg bag.
 - colorstuk 0-4 n white 1,3 l per 5 kg bag.

Recommended uses:

- Tile joints up to 4 mm.
 - Indoor wall tile coverings. Specially recommended for rectified tiles.
 - Indoor floor tiles, including public buildings.
- In the following applications, replace mixing water by **cl-stuk** additive.
- Outdoor floors.
 - High traffic floor tiles.
 - Floor tiles on radiant heating.
 - Pools and damp environments.

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
 - Glass mosaic.
 - Natural stone and marble not prone to staining.
- In the following applications, replace mixing water by **cl-stuk** additive.
- Wall tiles with mosaic-like patterns.
 - DQS slabs and other kinds of marble agglomerate.

Substrates:


- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 CG2

Coverage for 1 mm joint.

Tile	a x b mm	h mm	gr/m²
Mosaic	20 x 20	4	600
Mosaic	50 x 50	4	240
Tile	100 x 100	6	192
Tile	200 x 200	8	120
Tile	200 x 316	10	122
Tile	316 x 446	10	81
Tile	316 x 596	10	73
Tile	316 x 900	10	64
Tile	316 x 316	10	95
Tile	446 x 446	10	67
Tile	446 x 660	10	57
Tile	596 x 596	10	50
Tile	800 x 800	10	38
Tile	596 x 1200	10	38
Tile	180 x 659	10	106
Tile	193 x 1200	10	90

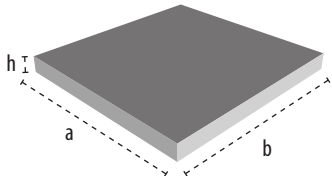

* Replace mixing water by **cl-stuk**.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



colorstuk 0-4

KEA	SAP		P/EU
B21501001	100004253	white	1.27 p/kg
B21502002	100004255	manhattan	1.56 p/kg
B21502003	100004256	bahama	1.56 p/kg
B21502004	100004257	cement	1.56 p/kg
B21502005	100004258	anthracite	1.56 p/kg
B21502006	100004259	black	1.56 p/kg
B21502009	100004260	ivory	1.56 p/kg
B21502010	100004261	brown	1.56 p/kg
B21502016	100004262	beige	1.56 p/kg
B21522218	100060532	caramel	1.50 p/kg
B21522217	100060533	moka	1.50 p/kg
B21522219	100060534	grey	1.54 p/kg
B21901001	100004287	white	1.19 p/kg
B21902002	100004288	manhattan	1.14 p/kg
B21522228	100106848	anthracite	1.14 p/kg

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

Packaging

Presentation	Europallet
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
25 kg bag	1.000 kg
25 kg bag	1.000 kg
25 kg bag	1.000 kg

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

colorstuk 2-12

colorstuk 2-12 is a type CG 2 fine grain grouting material as per EN 13888, for grouting joints from 2 to 12 mm. It is easy to apply, resistant and color stable, and it is specially recommended for floors with a wide joint.

A high-tech, fine grained colored mortar for grouting tile joints from 2 to 12 mm. Suitable for all kinds of ceramic tiles and natural stone. Indoors and outdoors.



- rustic floors
- rectified ceramics
- indoors
- high traffic
- outdoor floors
- radiant heating

colorstuk 2-12

Features:

- Cement-based, single-component, colored mortar.
- Fine texture mortar for grouting tile joints from 2 to 12 mm.
- Easy to apply and clean.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Wide color range.
- Mixing water: colorstuk 2-12 n color 1,0 l per 5 kg bag.
colorstuk 2-12 n color 5,0 l per 25 kg bag.

Recommended uses:

- Tile joints from 2 to 12 mm.
- Indoor wall tile coverings with wide joint.
- Indoor floors. Specially recommended for rustic tiles.
- In the following applications, replace mixing water with **cl-stuk** additive.
 - Outdoor floor and wall tiles.
 - High traffic floor tiles.
 - Floor tiles on radiant heating.
 - Pools and damp environments.

Coverage for 1 mm joint.

Tile	a x b mm	h mm	gr/m²
Mosaic	20 x 20	4	600
Mosaic	50 x 50	4	256
Tile	100 x 100	6	192
Tile	200 x 200	8	128
Tile	200 x 316	10	131
Tile	316 x 446	10	87
Tile	316 x 596	10	77
Tile	316 x 900	10	68
Tile	316 x 316	10	101
Tile	446 x 446	10	72
Tile	446 x 660	10	61
Tile	596 x 596	10	54
Tile	800 x 800	10	40
Tile	596 x 1200	10	40
Tile	180 x 659	10	113
Tile	193 x 1200	10	96

Materials:


- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- Terracotta tiles.
- In the following applications, replace mixing water with **cl-stuk** additive.
 - Ceramic tiles with relief to be covered with grouting material.

Substrates:

- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 CG2

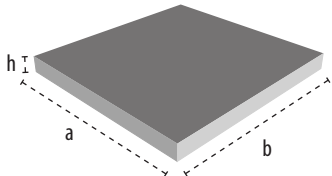

* Replace mixing water by **cl-stuk**.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



colorstuk 2-12

KEA	SAP		P/EU
B21522002	100004273	manhattan	1.63 p/kg
B21522003	100004274	bahama	1.63 p/kg
B21522004	100004275	cement	1.63 p/kg
B21522005	100004276	anthracite	1.63 p/kg
B21522006	100004277	black	1.63 p/kg
B21522009	100004278	ivory	1.63 p/kg
B21522016	100004279	beige	1.63 p/kg
B21521001	100004271	white	1.30 p/kg
B21522224	100060541	grey	1.54 p/kg
B21522223	100060544	moka	1.54 p/kg
B21522221	100060547	caramel	1.54 p/kg
B21522222	100060548	brown	1.48 p/kg
B21922002	100004289	manhattan	1.21 p/kg
B21922004	100004290	cement	1.21 p/kg
B21922005	100004291	anthracite	1.21 p/kg
B21922006	100004292	black	1.21 p/kg

Packaging

Presentation	Europallet
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
25 kg bag	1.000 kg
25 kg bag	1.000 kg
25 kg bag	1.000 kg
25 kg bag	1.000 kg

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

colorstuk especial n

colorstuk especial n is a type CG 2 very fine grain grouting material as per EN 13888, for grouting joints up to 4 mm. Its formula includes ultrafine aggregates, which make it specially recommended for tiles with a glaze sensitive to scratching.

A high-tech, fine grained colored mortar for grouting tile joints up to 4 mm. Specially recommended for grouting rectified ceramic tiles sensible to scratching.



glass
mosaic



rectified
ceramics



bath
environments



Crystal
series



high
traffic



radiant
heating

colorstuk especial n

Features:

- Cement-based, single-component, colored mortar.
- Ultrafine aggregates formula.
- Fine texture mortar for grouting tile joints up to 4 mm.
- Easy to apply and clean.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Wide special colors range.
- Mixing water: colorstuk especial n color 0,65 l per 2 kg bag.

Recommended uses:

- Tile joints up to 4 mm.
- Ceramic tiles with low hardness glaze as per Mohs scale.
- Indoor wall tile coverings. Specially recommended for rectified tiles.
- Indoor floor tiles, including public buildings.

In the following applications, replace mixing water with **cl-stuk** additive.

- Wall and floor tiles into direct contact with water.
- Floor tiles on radiant heating.

Coverage for 1 mm joint.

Tile	a x b mm	h mm	gr/m ²
Mosaic	20 x 20	4	640
Mosaic	50 x 50	4	256
Tile	100 x 100	6	192
Tile	200 x 200	8	128
Tile	200 x 316	10	131
Tile	316 x 446	10	87
Tile	316 x 596	10	77
Tile	316 x 900	10	68
Tile	316 x 316	10	101
Tile	446 x 446	10	72
Tile	446 x 660	10	61
Tile	596 x 596	10	54
Tile	800 x 800	10	40
Tile	596 x 1200	10	40
Tile	180 x 659	10	113
Tile	193 x 1200	10	96

Materials:

- Absorbent and non-absorbent ceramic tiles.
- Ceramic tiles with special finishes.
- Glass mosaic.
- Natural stone and marble not prone to staining.
- Do not use on polished materials.

In the following applications, replace mixing water by **cl-stuk** additive.


- Wall tiles with mosaic-like patterns.
- DQS slabs and other kinds of marble agglomerate.

Substrates:

- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 CG2

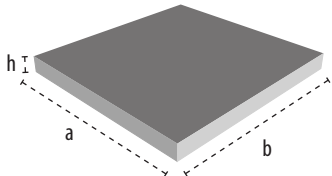

* Replace mixing water by **cl-stuk**.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.



colorstuk especial n

KEA	SAP		P/EU
B24302045	100090682	acid	5.22 p/kg
B24302049	100090684	cherry	22.00 p/kg
B24302043	100090685	dark	7.65 p/kg
B24302047	100090686	moka	5.22 p/kg
B24302042	100090687	nacare	5.40 p/kg
B24302044	100090689	vanilla	5.22 p/kg
B24302046	100090690	white	5.22 p/kg
B24302051	100097181	graphite	7.60 p/kg

Packaging

Presentation	Europallet
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg
2 kg bag	432 kg

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

colorstuk rapid n

colorstuk rapid n is a type CG 2 high-performance, cement-based grouting material as per EN 13888, for grouting joints up to 15 mm. Suitable for all kinds of ceramic tiles and natural stone, it is specially recommended for outdoor applications and permanently damp environments.

A high-tech, fine grained colored mortar with fast setting and hardening times for grouting tile joints up to 15 mm. Suitable for all kinds of ceramic tiles and natural stone. Indoors and outdoors.



- glass mosaic
- rectified ceramics
- high traffic
- bathroom environments
- pools
- facades

colorstuk rapid n

Features:

- Cement-based, single-component, colored mortar.
- Fine texture mortar for grouting tile joints up to 15 mm.
- Mortar with fast setting and hardening times.
- It prevents efflorescences.
- Excellent mechanical resistance.
- Resistant to heat and UV radiation.
- Frost-resistant.
- Waterproof mortar.
- Anti-mold action.
- Easy to apply and clean.
- Wide color range.
- Mixing water: colorstuk rapid n 1,1 l per 5 kg bag.

Recommended uses:

- Tile joints up to 15 mm.
- Indoor wall and floor tiles.
- Outdoor floors and terraces.
- High traffic floor tiles.
- Floor tiles on radiant heating.
- Pools and damp environments.
- Outdoor wall tiles in facades.

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Tiles with mosaic-like patterns.
- Glass mosaic.
- Clay and terracotta tiles.
- Natural stone and marble not prone to staining.

Substrates:


- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 CG2 Ar W

Coverage for 1 mm joint.

Tile	a x b mm	h mm	gr/m²
Mosaic	20 x 20	4	600
Mosaic	50 x 50	4	240
Tile	200 x 200	8	192
Tile	200 x 200	8	120
Tile	200 x 316	10	122
Tile	316 x 446	10	81
Tile	316 x 596	10	73
Tile	316 x 900	10	64
Tile	316 x 316	10	95
Tile	446 x 446	10	67
Tile	446 x 660	10	57
Tile	596 x 596	10	50
Tile	800 x 800	10	38
Tile	596 x 1200	10	38
Tile	180 x 659	10	106
Tile	193 x 1200	10	90

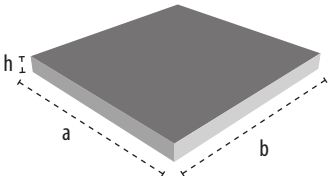

colorstuk rapid n

KEA	SAP		P/EU
B22501001	100004294	white	2.56 p/kg
B22502002	100004295	manhattan	2.14 p/kg
B22502003	100004296	bahama	2.83 p/kg
B22502004	100004297	cement	2.14 p/kg
B22502005	100004298	anthracite	2.14 p/kg
B22502006	100004299	black	2.70 p/kg
B22502007	100004300	caramel	2.70 p/kg
B22502008	100004301	terracotta	2.70 p/kg
B22502009	100004302	ivory	2.75 p/kg
B22502010	100004303	brown	2.70 p/kg
B22502011	100004304	tobacco	3.92 p/kg
B22502013	100004305	grey	2.62 p/kg
B22502016	100004308	beige	2.75 p/kg
B21522220	100060549	moka	2.52 p/kg
B22902006	100004309	black	2.31 p/kg

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

Packaging

Presentation	Europallet
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
5 kg bag	400 kg
25 kg bag	1.000 kg

epotech aqua

epotech aqua is a new line of epoxy putties for grouting tile joints. Two-component epoxy putty with no organic solvents. It is waterproof, it has outstanding chemical and mechanical properties and it is easy to apply. Specially recommended for application on mosaics and ceramic tiles with relief.

This material is suitable for grouting joints from 0 to 10 mm in floor and wall tiles, indoors and out. Excellent resistance to chemicals. Suitable for pools and permanently damp environments. Suitable as high adherence grouting material for ceramic tiles with any absorption level and format, for glass mosaic or natural stone.



- ☒ kitchen
countertops
- ☒ bathroom
environments
- ☒ public
toilets
- ☒ adhesive
epoxy
- ☒ shower trays
showers
- ☒ pools

epotech aqua

Features:

- Two-component colored epoxy putty.
- Easy to apply and clean. This product is free of organic solvents and plasticizers
- Excellent joint color stability.
- Resistance to most chemicals and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Tile joints up to 10 mm.
- Wide color range.

Recommended uses:

- Public toilets and private bathrooms.
- Wall tiles with special chemical resistance.
- Pools and damp environments.
- Tile joints with uniform color and shade, resistant to the passing of time.
- High traffic and outdoor floors.
- High adherence grouting material. Specially recommended.
 - Slate and natural stone.
 - Mesh backed glass mosaic.

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Tiles with mosaic-like patterns. Please refer to PORCELANOSA / VENIS catalogues.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- All usual substrates for ceramic tiles laying.

Packaging

Presentation	Europallet
3.6 kg can	288 kg
3.6 kg can	288 kg
3.6 kg can	288 kg
3.6 kg can	288 kg
3.6 kg can	288 kg



epotech aqua


KEA	SAP		P/EU
B42562016	100090692	anthracite	13.53 p/kg
B42562017	100090693	beige	13.53 p/kg
B42562020	100090694	white	13.74 p/kg
B42562018	100090695	cherry	17.01 p/kg
B42562019	100090696	grey	13.53 p/kg
B41061004	100116037	ivory	13.53 p/kg
B35200002	100113684	epoxy cleaning kit	43.00 p/u

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

epotech crystal

epotech crystal is an epoxy putty for grouting tile joints. Two-component putty with a translucent finish. It reflects the color of the tile or mosaic surrounding the joint. It features all the properties of epoxy putties: watertightness, high resistance to chemicals and mechanical properties. Specially recommended for application on mosaics and ceramic tiles with relief. Extra fine, micro grain porcelain grout.

This material is suitable for grouting joints up to 5 mm in floor and wall tiles indoors. Excellent resistance to chemicals in high concentrations. Suitable for permanently damp environments.

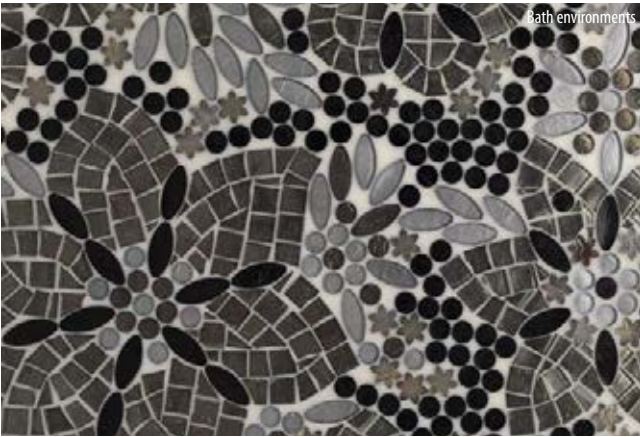

- ☒ Glass mosaic
- ☒ Rectified
ceramics
- ☒ Par-ker
- ☒ Technical
porcelain tiles
- ☒ Shower Trays
- ☒ Outdoors

epotech crystal

Features:


- Extra fine, micro grain porcelain grout.
- Easy to apply and clean epoxy putty.
- Translucent appearance.
- High resistance to most acids and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Prevents the development of fungi and bacteria.
- Tile joints up to 5 mm.

Recommended uses:

- Wall and floor tiles with minimum joint.
- Indoor floor and wall tiles.
- Mosaic or natural stone wall coverings.
- Wall tiles and mosaics with glass elements.
- Par-ker floor coverings.
- Technical, porcelain floor coverings.

Coverage for 1 mm joint.

Tile	a x b mm	gr/m²
Mosaic	20 x 20	960
Wall tile	mosaic type	600-800
Wall tile	20 x 30	125
Wall tile	30 x 90	90
Floor tile	30 x 30	95
Floor tile	44 x 44	75
Floor tile	60 x 60	60

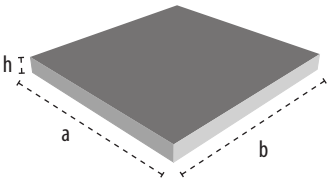

epotech crystal

KEA	SAP	P/EU
B42562025	100126899	crystal 16.20 p/kg

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Wall tiles and mosaics with glass elements.
- Natural stone and marble not prone to staining.

Before applying **epotech crystal** on any ceramic floor not included in the list above, carry out a prior test or check with the Technical Department at butech.

Substrates:

- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 RG

Packaging

Presentation	Europallet
3 kg can	295 Kg



epotech gold & silver

epotech gold & silver is an epoxy putty for grouting tile joints. Two-component putty plus metal flakes featuring a unique, glossy finish. It features all the properties of epoxy putties: watertightness, high resistance to chemicals and mechanical properties. Specially recommended for application on mosaics and ceramic tiles with relief.

This material is suitable for grouting joints up to 5 mm in floor and wall tiles indoors. Excellent resistance to chemicals in high concentrations. Suitable for permanently damp environments.



- ☒ Glass mosaic
- ☒ Mosaic-like tiles
- ☒ Rectified ceramics
- ☐ Special glazes
- ☒ Shower Trays
- ☐ Outdoors

epotech gold & silver

Features:

- Two-component epoxy putty plus golden or silver metallic additive.
- Easy to apply and clean.
- High resistance to most chemicals and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Prevents the development of fungi and bacteria.
- Tile joints up to 5 mm.

Recommended uses:

- Wall and floor tiles with decorative, metallic finish.
- Indoor wall and floor tiles.
- Damp environments.
- Tile joints with uniform color and shade, resistant to the passing of time.

Consumption for 1 mm joint.

Tile	a x b mm	gr/m²
Mosaic	20 x 20	960
Wall tile	mosaic type	600-800
Wall tile	20 x 30	125
Wall tile	30 x 90	90
Floor tile	30 x 30	95
Floor tile	44 x 44	75
Floor tile	60 x 60	60

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Natural stone and marble not prone to staining.


Before applying epotech gold & silver on metallic profiles or wall tiles with special glazes, carry out a prior test or check with the Technical Department at butech.

Substrates:

- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 RG

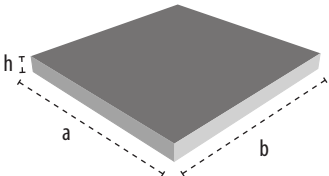

epotech gold

KEA	SAP	P/EU
B42562021	100121692	gold 25.20 p/kg

Packaging

Presentation	Europallet
3 kg can	295 Kg

epotech silver

KEA	SAP	P/EU
B42562022	100121693	silver 25.20 p/kg

Packaging

Presentation	Europallet
3 kg can	295 Kg

epotech

epotech is an epoxy putty for grouting tile joints. Waterproof, two-component epoxy putty with outstanding chemical and mechanical properties. Specially recommended for tile joints requiring the highest mechanical and chemical properties.

This material is suitable for grouting joints from 3 to 15 mm in floor and wall tiles, indoors and out. Excellent resistance to chemicals in high concentrations. Suitable for pools and permanently damp environments. Suitable as high adherence grouting material for ceramic tiles with any absorption level and format, for glass mosaic or natural stone.



Industries and laboratories

- ☒ kitchen
countertops
- ☒ industrial
kitchens
- ☒ chemical
industry
- ☒ food
industry
- ☒ shower trays
showers
- ☒ pools

epotech

Features:

- Two-component colored epoxy putty.
- Excellent joint color stability.
- High resistance to most chemicals and alkali, even in high concentrations.
- Waterproof joint, no water absorption.
- Excellent adherence and mechanical resistance.
- Tile joints from 3 to 15 mm.

Recommended uses:

- Wall tiles with special chemical resistance.
- Chemical and food industry and premises subject to thorough cleaning.
- Pools and permanently damp environments, Turkish baths and spas.
- High traffic and outdoor floors.
- High adherence grouting material. Specially recommended.
 - Slate and natural stone.
 - Mesh backed glass mosaic.

Materials:

- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- All usual substrates for ceramic tiles laying.

Certifications/Standards:

EN 13888 RG


Packaging

Presentation	Europallet
5 kg can	375 kg/pallet
5 kg can	375 kg/pallet
5 kg can	375 kg/pallet
5 kg can	375 kg/pallet



Coverage for 1 mm joint.

Tile	a x b mm	gr/m²
Mosaic	20 x 20	960
Wall tile	mosaic type 20 x 30	600-800
Wall tile	20 x 30	125
Wall tile	30 x 90	90
Floor tile	30 x 30	95
Floor tile	44 x 44	75
Floor tile	60 x 60	60

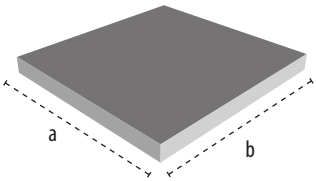

epotech

KEA	SAP		P/EU
B42562001	100004371	white	7.04 p/kg
B42562002	100004372	manhattan	6.42 p/kg
B42562005	100004373	anthracite	6.42 p/kg
B42562009	100007815	ivory	6.42 p/kg
B35200002	100113684	epoxy cleaning kit	43.00 p/u

Colors shown are approximate. There are physical samples available to customers for checking the real grout color.

Grouting material selection chart

1. Once chosen the wall tile model, determine the type of ceramic material. Refer to the manufacturer's catalogue: PORCELANOSA, VENIS, URBATEK and L'ANTIC COLONIAL.

2. Search in the wall or floor tables, given the case, the grouts which are compatible with the type of ceramic material chosen.

	colorstuk 0-4	colorstuk 2-12	colorstuk especial	colorstuk rapid n	epotech aqua	epotech crystal	epotech gold & silver	epotech
WALL								
Wall tile								
Rectified wall tiles								
Gloss (Crystal) wall tiles								
Mosaic-like wall tiles			*					
Glass mosaic			*		**	**	**	**
Urbatek								
Urbatek polished					**	**	**	**
Ston-ker								
Par-ker								
XLIGHT								
Natural stone	**	**	**	**	**	**	**	**

	colorstuk 0-4	colorstuk 2-12	colorstuk especial	colorstuk rapid n	epotech aqua	epotech crystal	epotech gold & silver	epotech
FLOOR								
Stoneware tiles								
Porcelain tiles								
Urbatek								
Urbatek polished					**	**	**	**
Ston-ker								
Ston-ker brick / Mosaic								
Par-ker								
DQS	*				**	**	**	**
Natural stone	**	**	**	**	**	**	**	**
Glass mosaic			*		**	**	**	**

3. Check which one of the compatible adhesives best matches its final use and substrate type.

SUPPORT FINAL USE	Bath environ- ment	Electric radiant floor heating	High traffic	Pool	Outdoor floor	Façade	Watertight- ness	Resistance to chemi- cals
colorstuk rapid n								
epotech aqua								
epotech crystal								
colorstuk 0-4	*	*	*					
colorstuk 2-12	*	*	*					
colorstuk especial	*	*						
epotech gold & silver								
epotech								


4. Once you have chosen an adhesive which is compatible with the tile and its final use, check its features in this catalogue.

Given the wide variety of natural stones and glass mosaics from L'ANTIC COLONIAL, we recommend to check the material's scratch and stain resistance.

*: Mix with **d-stuk** additive.
**: Be extremely cautious when cleaning the grout off the chosen floor or wall tile.

self-leveling spacers

Leveling system for ceramic tiles. Eases ceramic tile laying and guarantees a perfectly flat surface of the final installation. The system consists of a new type of spacer with adjustable height that levels the surrounding tiles and prevents them from moving. Specially recommended when tile, design or use features demand a perfect finish, with an even, seamless surface.

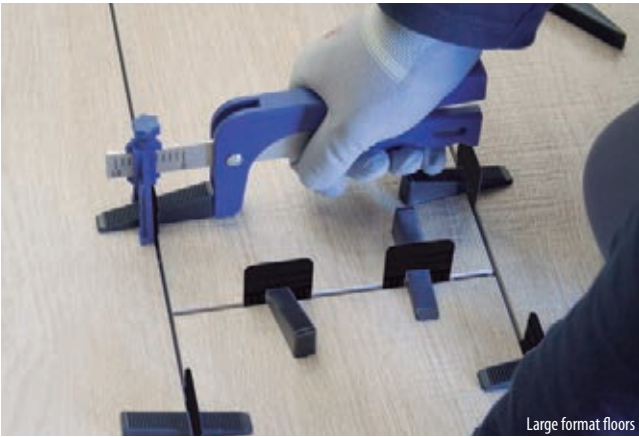

urbatek



ston-ker



parker



large
format



rectified
ceramics



minimum
joint

self-leveling spacers

Features:


- Guarantees tiles are even.
- Prevents tiles from moving due to laying errors or due to mortar setting.
- Reduces retouching and laying times.
- Suitable for 1-3 mm wide joints.
- Suitable for tiles 3 to 15 mm thick.
- The system consists of a spacer, a wedge and an adjusting tool.
- Wedges are recoverable, only the spacers are consumed.

Recommended uses:

- Wall and floor tiles with minimum joint.
- Large format floor tiles.
- Laying of rectified wall tiles.
- Tiles with reduced thickness: XLIGHT
- Interlocking floor designs.
- Glued facades.

Coverage:

a (cm)											
19.3	50										
31.6	40	33									
33	50	29	28								
40	50	33	29	25							
44	44	30	25	22	20						
59.6	37	25	21	19	17	13					
66	35	23	20	17	15	12	11				
80	34	23	20	17	15	11	11	9			
90	31	20	17	15	14	10	9	8	7		
100	30	20	17	15	13	10	9	8	7	6	
120	27	18	15	14	12	9	8	7	6	5	5
	19.3	31.6	33	40	44	59.6	66	80	90	100	120 b (cm)

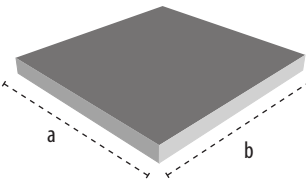

Materials:

- All wall tiles and similar products laid with cement-based adhesives.
- Thickness between 3 and 15 mm.

Substrates:

- All usual substrates for ceramic tiles laying.



self-leveling spacers

KEA	SAP		P/EU
B83511063	100108031	wedge	18.01 p/bag
B83511062	100108032	wedge	41.77 p/bag
B83511056	100095383	wedge	79.34 p/bag

B83511059	100108026	1 mm spacer	12.59 p/bag
B83511058	100108027	1 mm spacer	34.41 p/bag
B83511065	100108028	1 mm spacer	56.52 p/bag

B83511061	100108029	2 mm spacer	12.59 p/bag
B83511060	100108030	2 mm spacer	34.41 p/bag
B83511057	100095382	2 mm spacer	56.52 p/bag

B83511067	100109070	3 mm spacer	12.59 p/bag
B83511066	100109071	3 mm spacer	34.41 p/bag
B83511070	100109072	3 mm spacer	56.52 p/bag

B83511072	100123264	supplementary lift piece	12,50 p/bag
-----------	-----------	--------------------------	-------------

KEA	SAP		P/EU
B83511064	100108034	1 mm spacer system kit	67.31 p/kit
B83511069	100109073	2mm spacer system kit	67.31 p/kit
B83511068	100109074	3mm spacer system kit	67.31 p/kit

KEA	SAP		P/EU
B83510071	100095386	pincers for self-leveling spacer	42.50 p/u

Products with special sale conditions

Packaging

Presentation
100 units/bag
300 units/bag
500 units/bag

100 units/bag
300 units/bag
500 units/bag

100 units/bag
300 units/bag
500 units/bag

100 units/bag
300 units/bag
500 units/bag

50 units/bag

Presentation
Kit
Kit
Kit

Presentation
Unit

s-107

S-107 is an acetic silicone putty for sealing joints. Specially recommended for sealing joints in bathrooms and for sealing perimeter joints in wall tile coverings. Indoor use.

Is a silicon rubber technical elastic joint sealant with acetic crosslinking. It polymerizes in contact with dampness becoming an elastomer highly elastic and resistant to atmospheric agents.



- ☒mortar
- ☒ceramics
- ☒glass
- ☒metal
- ☒joint joint
- ☒outdoor

s-107

Features:

- Single-component acetic silicone.
- High elasticity.
- Good adherence.
- Resistant to UV rays.

Recommended uses:

- Sealing joints in ceramics, glass, metal, plastics and painted surfaces.
- Sealing perimeter joints in wall tile coverings.
- Gluing ceramic materials on wood boards.

Coverage:

• 2 x 2 mm joint	75.0 m
• 3 x 3 mm joint	33.3 m
• 5 x 3 mm joint	20.0 m
• 5 x 5 mm joint	12.0 m
• 8 x 4 mm joint	8.3 m
• 8 x 6 mm joint	6.2 m

Coverage
(ml/cartridge)

=

300

joint width (mm) x joint depth (mm)

s-107

KEA	SAP		P/EU
B82301004	100005811	s-107 blanco	3.39 p/u
B82301005	100005812	s-107 transparente	3.39 p/u
B82301006	100005813	s-107 gris	3.39 p/u

Products with special sale conditions

Materials:

- Ceramic tiles and glass mosaic.
- Glass.
- Plastic material.
- Do not use with materials which are sensible to the action of acids, like marble or other natural stones.

Substrates:

- Do not use on substrates which are sensible to the action of acids:
 - Screeds and floors with cement mortar.
 - Concrete.

Packaging

Presentation	Packaging
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box



s-107 n

S-107 n is a neutral silicone putty for sealing joints. Specially recommended for sealing movement joints. Indoor and outdoor use.,

This putty crosslinks in contact with dampness and does not give off odors, thus becoming an elastomer highly elastic and resistant to atmospheric agents.



- ☒mortar
- ☒ceramics
- ☒glass
- ☒metal
- ☒movement joint
- ☒outdoor

s-107 n

Features:

- Single-component neutral silicone.
- High elasticity.
- Good adherence.
- Resistant to UV rays.
- Frost-resistant.

Recommended uses:

- Sealing joints even between materials sensible to chemical attack.
- Sealing movement joints in floors and walls.
- Sealing joints in ceramics, glass, metal and plastics.
- Sealing perimeter joints in wall tile coverings.
- Gluing ceramic materials on wood boards.

Coverage:

• 2 x 2 mm joint	75.0 m
• 3 x 3 mm joint	33.3 m
• 5 x 3 mm joint	20.0 m
• 5 x 5 mm joint	12.0 m
• 8 x 4 mm joint	8.3 m

Coverage
(ml/cartridge)

=

300

joint width (mm) x joint depth (mm)

s-107 n

KEA	SAP		P/EU
B82302001	100005814	s-107_n blanco	5,16 p/u
B82302002	100005815	s-107_n transparente	5,16 p/u
B82302003	100005816	s-107_n gris	5,16 p/u
B82302004	100005817	s-107_n negro	5,16 p/u
B82600026	100115950	s-107_n beige	5,16 p/u
B82600035	100120606	s-107_n caramelo	6,46 p/u
B82600036	100120608	s-107_n antracita	6,46 p/u
B82600032	100120609	s-107_n bahama	6,46 p/u
B82600030	100120620	s-107_n cemento	6,46 p/u
B82600029	100120621	s-107_n marfil	6,46 p/u
B82600031	100120622	s-107_n marrón	6,46 p/u
B82600034	100120623	s-107_n moka	6,46 p/u
B82600028	100120624	s-107_n tabaco	6,46 p/u
B82600033	100120625	s-107_n terracota	6,46 p/u

Products with special sale conditions

Materials:

- Ceramic tiles and glass mosaic.
- Glass.
- Metal.
- Plastic material, PVC.
- Concrete slabs.
- Wood.

Substrates:

- All usual substrates for ceramic tiles laying.

Packaging

Presentation	Packaging
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box
300 ml cartridge	25 cartridges x box



p-404

p-404 is polyurethane putty for sealing joints. Specially recommended for sealing movement joints outdoors. Indoor and outdoor use.,

This reticular putty in contact with dampness does not give off odors, thus becoming an extraordinary adherent, elastic and resistant elastomer to atmospheric agents.



- ☒ mortar
- ☒ ceramics
- ☒ glass
- ☒ metal
- ☒ joint joint
- ☒ outdoor

p-404

Features:

- Single-component polyurethane putty.
- High elasticity.
- High adherence.
- Resistant to UV rays.
- Frost-resistant.

Recommended uses:

- Sealing joints even between materials sensible to chemical attack.
- Sealing movement joints in floors and walls.
- Bonding of building materials like ceramics, concrete, roof tiles, wood, aluminium, polyester or PVC.
- Gluing ceramic materials on metal or wood boards.
- Gluing Concept XPS panels.

Coverage:

• 2 x 2 mm joint	77.5 m
• 3 x 3 mm joint	31.4 m
• 5 x 3 mm joint	20.6 m
• 5 x 5 mm joint	12.4 m
• 8 x 4 mm joint	8.6 m
• 8 x 6 mm joint	6.4 m

Coverage
(ml/cartridge)

=

310

joint width (mm) x joint depth (mm)

Materials:

- Ceramic tiles and glass mosaic.
- Glass.
- Metal.
- Plastic material, PVC.
- Concrete slabs.
- Wood.
- Concept XPS panels.

Substrates:

- All usual substrates for ceramic tiles laying.

p-404

KEA	SAP		P/EU
B82401001	100005818	p-404 blanco	6.20 p/u
B82401002	100005819	p-404 gris	6.20 p/u
B82401003	100005820	p-404 negro	6.20 p/u

Packaging


Presentation	Packaging
310 ml cartridge	25 cartridges x box
310 ml cartridge	25 cartridges x box
310 ml cartridge	25 cartridges x box



cl-stuk

cl-stuk is a latex which mixed with cement-based grouts like **colorstuk n**, reduces water absorption and enhances mechanical resistance and deformability. Specially recommended when laying ceramic outdoors and in permanently damp environments.

A latex additive that can be mixed with the **colorstuk** range of high-tech grout mortars in cases when increased mechanical resistance, reduced water absorption or improved flexibility is required.

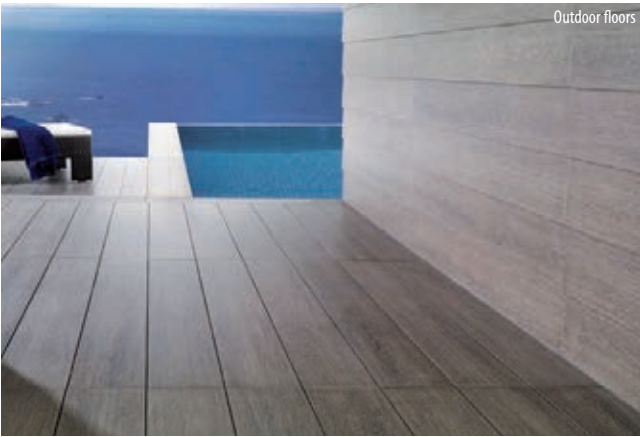

- ☒ floors
- ☒ glass mosaic
- ☒ radiant heating
- ☒ high traffic
- ☒ pools
- ☒ facades

cl-stuk

Features:

- Water-based acrylic resins latex.
- Resistant to the most common chemicals.
- It reduces mortar water absorption.
- It enhances the adherence and deformability of the grouting material.
- It increases resistance to abrasion.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Recommended uses:

- Specially recommended in:
- Outdoor floor and wall tiles.
 - High traffic floor tiles.
 - Floor tiles on radiant heating.
 - Pools and damp environments.
- It enhances grouting material performance in:
- Indoor wall tile coverings. Specially recommended for rectified tiles.
 - Indoor floor tiles, including public buildings.

Coverage:

Product	%	liters	Kg/bag
Colorstuk 0-4 n white	34%	1.6-1.8	5
Colorstuk 0-4 n white	34%	8.2 - 8.8	25
Colorstuk 0-4 n color	26%	1.2-1.4	5
Colorstuk 0-4 n color	26%	6.4-6.6	25
Colorstuk 2-12 n	20%	0.9-1.1	5
Colorstuk 2-12 n	20%	4.8 - 5.2	25
Colorstuk especial n	32.5%	0.65	2

Materials:

- Specially recommended in:
- Wall tiles with mosaic-like patterns.
 - DQS slabs and other kinds of marble agglomerate.
- It enhances grouting material performance in:
- Absorbent and non-absorbent ceramic tiles, including porcelain tiles.
 - Glass mosaic.
 - Natural stone and marble not prone to staining.

Substrates:

- All usual substrates for ceramic tiles laying.

cl-stuk

KEA	SAP		P/EU
B51201001	100004374	cl-stuk	3.12 p/kg
B51501001	100004375	cl-stuk	2.44 p/kg

Packaging

Presentation	Packaging
2 kg can	448 kg/pallet
5 kg can	480 kg/pallet





Substrate preparation products

Mortar additive

unicem 104

Self-leveling mortars

level 1 n 105

level 1 pro 106

level 3 107

Primer

uniprim 108

super-prim 109

Cleaning products

acid net 110

basic gel 110

acid net + 112

acid net 1L 112

basic gel 1L 112

porce-clean 113

colorstuk cleaner 113

epotech cleaner 113


colorstuk sealer 114

non slip tile 114

unicem

unicem is a latex that enhances the overall mechanical performance of cement-based mortars. Specially recommended for cement rendering, floor screeds and other applications in outdoor environments.

It guarantees increased waterproof protection, cohesion, reduced deformability and resistance to atmospheric agents of cement-based substrates. Recommended for intermediate bond coats between mortars.

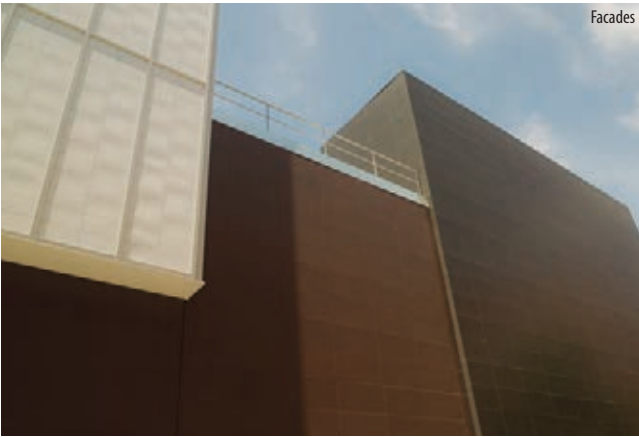

Facades

- ☒intermediate
bond coat
- ☒floor tile
outdoor
- ☒radiant
heating
- ☒high
traffic
- ☒pools
- ☒facades

unicem

Features:

- Water dispersion synthetic resins latex.
- Excellent resistance to dampness.
- Good deformability.
- Excellent resistance to UV rays and the effect of heat.
- Frost-resistant.

Recommended uses:

- Outdoor wall and floor tiles. Specially recommended in facades
- Floor tiles on radiant heating.
- High traffic floor tiles.
- Pools and environments with a strong water presence.
- Making of fully bonded screeds.

Coverage:

Substrate	Coverage
Mortar screed	
• < 10 mm	150 gr/m² and thickness millimeter
• 10-35 mm	50 gr/m² and thickness millimeter
• > 35 mm	30 gr/m² and thickness millimeter
Mortar rendering	70 gr/m² and thickness millimeter
Bond coat	200 - 300 gr/m²

Materials:

- All wall tiles and similar products to be laid with cement-based adhesives.

Substrates:

- Stable structures.

unicem

KEA	SAP		P/EU
B51603002	100004378	unicem	4.60 p/kg
B51604002	100004379	unicem	4.20 p/kg

Packaging

Presentation	Europallet
5 kg can	480 kg/pallet
20 kg can	560 kg/pallet



level 1 n

level 1 n is a fast hardening, self-leveling mortar for leveling and regularizing substrates for all kinds of floor tiles. 2 to 10 mm thickness. Specially recommended for laying ceramic floor tiles with a minimal joint indoors.

It is formulated for creating 2 to 10 mm floor substrates. It features good workability, fast-setting times, and a high mechanical performance. It allows to prepare floors well levelled, for a correct and quick fixing of rectified ceramic tiles



Large format floors

- ☒ston-ker
- ☒large
format
- ☒ceramics
ceramics
- ☒radiant
heating
- ☒ceramics
existing
- ☒outdoor

level 1 n

Features:

- Compressive strenght ≥ 30 N/mm²
- Flexural strenght ≥ 7 N/mm²
- Single-component, self-leveling mortar.
- Excellent adherence. Flexible.
- Application thickness between 2 and 10 mm.
- Easy application with a straight edge trowel or scraper.
- Indoor use.
- Mixing water: 5,75 l per 23 kg bag

Recommended uses:

- Substrate regularization in refurbishing jobs.
- Indoor large format floor tile coverings.
- Indoor large format rectified floor tile coverings.
- Indoor floor tile coverings with a 1 mm joint.
- Floor tiles with radiant heating.

Coverage:

Substrate	Coverage
Self-leveling floors	1,4 kg/m² and thickness millimeter

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption $< 0.5\%$ as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marbles.

Certifications/Standards:

- EN 13813
- CT C30-F7

Priming:

- Cement-based substrate, previously apply **uniprim**.
- Glazed ceramic tiles, previously apply **super-prim**.

level 1 n

KEA	SAP		P/EU
B15901002	100048841	level 1 n	0.97 p/kg

Packaging

Presentation	Europallet
23 kg bag	920 kg/pallet



level 1 pro

level 1 pro is a fast hardening, self-leveling mortar for leveling and regularizing substrates for all kinds of floor tiles. 2 to 10 mm thickness. Specially recommended for laying rectified ceramic floor tiles.

It is formulated for creating 2 to 10 mm floor substrates. It features good workability, fast-setting times, and a high mechanical performance. It allows to prepare floors well levelled, for a correct and quick fixing of rectified ceramic tiles



Large format floors



ston-ker



large format



ceramics



radiant heating



ceramics existing



outdoor

level 1 pro

Features:

- Single-component, self-leveling mortar.
- Excellent adherence.
- Fast hardening. Ready for traffic in 4-5 hours.
- Application thickness between 2 and 10 mm.
- Easy application with a straight edge trowel or scraper. Pumpable.
- Indoor use.
- Mixing water. 6.0 l per 25 kg bag.

Recommended uses:

- Substrate regularization in refurbishing jobs.
- Indoor large format ceramic floor tile coverings.
- Indoor rectified floor tile coverings.
- Indoor floor tile coverings with a 1 mm joint.
- Laminate floating floors.
- Synthetic floors and carpet.
- Do not use in outdoor floors.

Coverage:

Substrate	Coverage
Self-leveling floors	1.4 kg per m² and thickness millimeter

Materials:

- Large format ceramics.
- Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Natural stone and marble not prone to staining.
- Laminate floors and parquet.

Certifications/Standards:

EN 13813 CT-C20-F5

Primer:

- For cement-based, concrete or anhydrite substrates, first apply **uniprim**.
- For existing ceramic substrates, first apply **super-prim**.

level 1 pro

KEA	SAP	P/EU
B15901005	100141151	level 1 pro
		0,66 p/kg

Packaging

Presentation	Europallet
25 kg bag	1000 kg



level 3

level 3 is a fast hardening, self-leveling mortar with fibres for leveling and regularizing substrates for all kinds of floor tiles. 3 to 30 mm thickness. Specially recommended for laying ceramic floor tiles with a minimal joint indoors.

It is formulated for creating 3 to 30 mm floor substrates. It features good workability, fast-setting times, and a high mechanical performance. It allows to prepare floors well levelled, for a correct and quick fixing of rectified ceramic tiles



Large format floors



ston-ker



large format



ceramics



wood



ceramics existing



outdoor

level 3

Features:

- Compressive strenght $\geq 25 \text{ N/mm}^2$
- Flexural strenght $\geq 5 \text{ N/mm}^2$
- Single-component, self-leveling mortar.
- Excellent adherence. Flexible.
- High fibre content.
- Application thickness between 3 and 30 mm.
- Easy application with a straight edge trowel or scraper.
- Indoor use.
- Mixing water: 4.25 – 4.50 l per 25 kg bag

Recommended uses:

- Indoor large format floor tile coverings.
- Indoor large format rectified floor tile coverings.
- Indoor floor tile coverings with a 1 mm joint.
- Floor tiles with radiant heating.

Coverage:

Substrate	Coverage
Self-leveling floors	1,4 kg/m² and thickness millimeter

Materials:

- Large format floor tiles.
- Porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Natural stone and marbles.

Certifications/Standards:

EN 13813 CT C25-F5

Priming:

- Cement-based substrate, previously apply **uniprim**.
- Glazed ceramic tiles and wood substrates, previously apply **super-prim**.

level 3

KEA	SAP	P/EU
B15901004	100104577	level 3
		1,00 p/kg

Packaging

Presentation	Europallet
25 kg bag	1000kg/pallet



uniprim

uniprim is a water-based primer made of synthetic resins for the insulation of plaster, anhydrite and molding plaster substrates, prior to the use of cement-based adhesives. It reduces water absorption and improves the consistency of cement-based substrates

C2-type cement-based adhesives can be used to lay ceramic tiles quickly and efficiently on plaster, anhydrite and molding plaster substrates. It reduces the level of absorption of highly absorbent substrates, preventing cement-based adhesives from drying out too quickly and thus ensuring that they set properly. Priming prior to the application of self-leveling mortars on absorbent substrates, avoiding the appearance of bubbles or cracks because of a fast drying.



Plaster substrates

- ☒ mortar
- ☒ concrete
- ☒ wood
- ☒ untiled floor
anhydrite
- ☒ plaster
board
- ☒ plastered
wall

uniprim

Features:

- Water-based synthetic resins primer.
- Once dry, it leaves a film over the substrate, which in plaster-based substrates prevents contact and chemical reaction with cement-based adhesives. It prevents ettringite buildup.
- It reduces substrate water absorption.
- It improves the bonding material setting time.
- It increases cohesion of the substrate.
- Easy application with a paint roller or a wide paintbrush.
- Indoor and outdoor use.,

Recommended uses:

- Wall tiles on plaster or molding plaster substrates.
- Floor tiles on anhydrite substrates.
- Ceramic tiles on cement-based substrates with weak consistency.
- Reinforcement of self-leveling mortars.

Coverage:

Substrate	Coverage
Anhydrite/plaster substrate	100 - 200 gr/m²

Materials:

- All wall tiles and similar products to be laid with cement-based adhesives.

Substrates:

- Plasterboards and plastered walls.
- Anhydrite floor coverings.
- Cement-based substrates with high water absorption.
- Plasterboards.
- Untreated partition walls for laying tiles.

Packaging

Presentation	Europallet
5 kg can	480 kg/pallet
20 kg can	560 kg/pallet




uniprim

KEA	SAP		P/EU
B52501001	100004384	uniprim	4.31 p/kg
B52601001	100004387	uniprim	3.84 p/kg

super-prim

superprim is a water-based acrylic resin primer with silica arids, used for preparing substrates prior to using adhesives, self-leveling mortars and mortar screeds. It reduces water absorption and improves the consistency of cement-based substrates. Professional use.

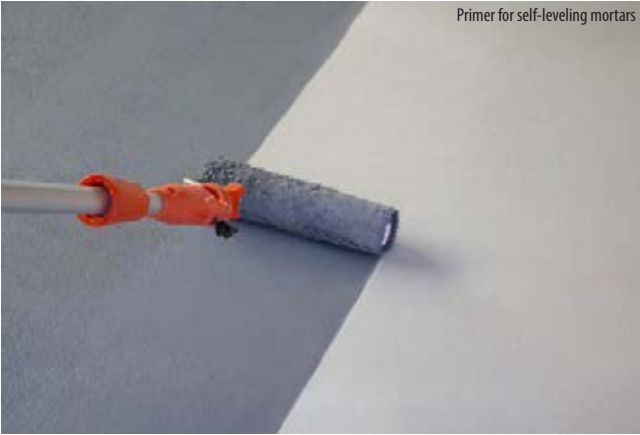

Primer for self-leveling mortars

- ☒ mortar
- ☒ plaster or
anhydrite
- ☒ existing
ceramics
- ☒ wood
- ☒ metal
- ☒ self-leveling
mortar

super-prim

Features:

- Water-based, acrylic resin latex with silica arids.
- It enhances the adherence of cement mortars on glazed wall coverings.
- It improves the bonding material setting time.
- It reduces substrate water absorption.
- It increases cohesion of the substrate.
- Easy application with a paint roller or a wide paintbrush. Can be applied with airless spray.
- Indoor and outdoor use.
- Do not dilute with water or mix with any other liquids.

Recommended uses:

- Primer for self-leveling mortars on highly absorbent or existing ceramic tile coverings.
- Ceramic tiles on cement-based substrates with weak consistency or existing ceramic tile coverings.
- Ceramic floor coverings on anhydrite substrates or ceramic wall coverings on plaster or molding plaster.
- Mortar screeds on brick partition walls or concrete block walls.
- Mortar screeds on ceramic tile or natural stone floors.
- Do not use in substrates subject to dampness increases.

Coverage:

Substrate	Coverage
Non absorbent	200 - 250 gr/m²
Absorbent	250-300 gr/m²

Materials:

- All wall tiles and similar products to be laid with cement-based adhesives.

Substrates:

- Ceramic brick partition walls.
- Cement covered floors and walls.
- Concrete slabs and aerated concrete blocks.
- Anhydrite-covered floors and plastered walls.
- Indoor ceramic floor and wall tiles.
- Indoor wood boards.
- Indoor metal sheets.

Packaging

Presentation	Box
10 kg can	480 kg/pallet



acid net

acid net is an acid detergent for cleaning ceramic floor and wall tiles. Specially recommended for cleaning building debris. Indoor and outdoor use.

It is an acid solution that in contact with cement reacts and removes dirt or stains without damaging coverings or cement based joints like **colorstuk**. Suitable for removing saltpetre remains or dirt sensible to acid attack.



- ☒ wall tile
- ☒ floor tile
- ☒ floor tile porcelain tile
- ☒ glass mosaic
- ☐ natural
- ☐ special glazes

acid net

Features:

- Acid solution.
- Colorless liquid.
- pH < 0.1
- Viscosity: 5.0 - 8.0 cp at 20°C
- Recommended action time: 10-15 min.

Recommended uses:

- Building site final cleaning.
- Cleaning of remains of adhesives and cement-based grouting materials in floor and wall tiles.
- Cleaning of efflorescences and salts remains.
- Cleaning of lime remains and film.
- Cleaning of glazed substrates prior to laying new tiles.

Coverage:

Dilution		
1 : 1 with clear water		90-100 gr/m²
1 : 2 with clear water		45-50 gr/m²
1 : 3 with clear water		25-35 gr/m²
1 : 5 with clear water		20 gr/m²

Materials:

- Ceramic glazed and non-glazed tiles GLA, ULA.
- Glass mosaic.
- Natural stones resistant to acid descalers.
- It is not recommended to use **acid net** in materials sensible to acid cleaners like:
 - Marbles and natural limestones.
 - Ceramic tiles with surface finishes sensible to acid attack, like polished or metallic finishes.

Substrates:

- Do not apply directly on:
 - Cement covered floors and walls .
 - Concrete slabs.

Packaging

Presentation	Europallet
2 kg can	448 kg/pallet
5 kg can	480 kg/pallet



*Given the wide variety of ceramic materials, we recommend to check with your tile provider about chemical resistance to acid attack.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

basic gel

basic gel is a concentrated alkaline detergent developed for cleaning ceramic tiles in general. Specially recommended for removing wax, varnish and other surface treatments. Indoor and outdoor use.

It is a basic pH remover, made from specific detergents and alkaline agents that provide it with excellent proprieties for removing common dirt, without damaging coverings or cement based joints like **colorstuk**.



- ☒ wall tile
- ☒ floor tile
- ☒ floor tile porcelain tile
- ☒ glass mosaic
- ☒ natural marble
- ☐ special glazes

basic gel

Features:

- Alkaline solution.
- Slightly red liquid.
- pH > 12.5
- Recommended action time: 10-15 min.

Recommended uses:

- Regular cleaning of ceramic wall tiles.
- Cleaning of remains of wax, oil or grease from floor and wall tiles .
- Cleaning of glazed substrates prior to laying new tiles.

Coverage:

Dilution		
1 : 1 with clear water		85-100 gr/m²
1 : 2 with clear water		40-50 gr/m²

Materials:

- Ceramic glazed and non-glazed tiles GLA, ULA.
- Glass mosaic.
- Natural stones resistant to alkaline detergents.
- Stones without artificial treatment.

Given the wide variety of ceramic materials, we recommend to check with your tile provider about chemical resistance to alkaline acids before using basic gel. In any case, we recommend to perform a preliminary test.

Certifications/Standards:

CAS No.: 1310-73-2
Phrases: R-34
S2 , S26 , S36/37/39 , S45
Danger symbols: C

Substrates:

- All usual substrates for ceramic tiles laying.

basic gel

KEA	SAP		P/EU
B31201001	100004341	basic gel	11.33 p/kg
B31501001	100004346	basic gel	10.91 p/kg

Packaging

Presentation	Europallet
2 kg can	448 kg/pallet
5 kg can	480 kg/pallet



*Given the wide variety of ceramic materials, we recommend to check with your tile provider about chemical resistance to alkali attack.

Before using this product in any application not indicated in this catalogue, please perform a test or refer to the product's technical sheet.

acid net +

acid net + is a concentrated descaler for cleaning ceramic floor and wall tiles. Specially recommended for cleaning building debris. Indoor and outdoor use.

Recommended uses:

- Building site final cleaning.
- Cleaning of remains of adhesives and cement-based grouting materials in floor and wall tiles.
- Cleaning of efflorescences and salts remains.
- Cleaning of plaster remains and plaster-based remains.
- Cleaning of lime remains and film.
- Cleaning of glazed substrates prior to laying new tiles.

acid net +

KEA	SAP	P/EU
B35200004	100120424	acid net +

acid net 1L

acid net is an acid detergent for cleaning ceramic floor and wall tiles. It dissolves all kinds of cement debris without damaging coverings or cement based joints like **colorstuk**.

Recommended uses:

- Cleaning of remains of adhesives and cement-based grouting materials in floor and wall tiles.
- Cleaning of efflorescences and salts remains.
- Cleaning of plaster remains and plaster-based remains.
- Cleaning of lime remains and film.
- Cleaning of glazed substrates prior to laying new tiles.

acid net 1L

KEA	SAP	P/EU
B35200003	100120423	acid net

basic gel 1L

Concentrated alkaline detergent developed for cleaning ceramic tiles in general. terra-cotta and antiqued marble. It removes all kinds of oils, varnishes, paints, wax and home stains. Specially effective for etching former treatments.

Recommended uses:

- Intensive cleaning of ceramic wall tiles.
- Cleaning of remains of wax, oil or grease from floor and wall tiles .
- Cleaning of glazed substrates prior to laying new tiles.

basic gel 1L

KEA	SAP	P/EU
B35200005	100120425	basic gel 1000 ml



Coverage:

Dilution 1: 1 with clear water	90-100 gr/m²
Dilution 1: 2 with clear water	45-50 gr/m²

Packaging

Presentation	Box
1000 ml bottle	12 bottles



Coverage:

Dilution 1: 1 with clear water	90-100 gr/m²
Dilution 1: 2 with clear water	45-50 gr/m²

Packaging

Presentation	Box
1000 ml bottle	12 bottles



Coverage:

Dilution 1: 1 with clear water	85-100 ml / m²
Dilution 1: 2 with clear water	40-50 ml / m²

Packaging

Presentation	Box
1000 ml bottle	12 bottles

*Given the wide variety of ceramic materials, glass mosaics and natural stones, we recommend to check with your tile provider about chemical resistance of the tiles before applying any cleaning product.

Before using any cleaning product, please perform a test or refer to the product's technical sheet.

porce-clean

Neutral detergent for cleaning ceramic and natural stone floor coverings. High degreasing power for a deep and perfect cleaning. Fast drying. Indoor and outdoor use.

Recommended uses:

- Regular cleaning of ceramic wall tiles.
- Cleaning of remains of wax, oil or grease from floor and wall tiles .

porce-clean

KEA	SAP	P/EU
B35200008	100120431	porce-clean

colorstuk cleaner

Cleaner for cement based grouts. It removes dirt build-up and recovers the grout's original color. Specially recommended for maintenance of joints sealed with **colorstuk**.

Recommended uses:

- Cleaning of cement based joints stained with dust and dirt.
- Recovering the color in cement based tiling joints.

colorstuk cleaner

KEA	SAP	P/EU
B35200007	100120426	colorstuk cleaner

epotech cleaner

Water-based detergent for cleaning epoxy putties remains and stains. Specially recommended for cleaning remains of **epotech aqua**. Professional use.

Recommended uses:

- Cleaning of epoxy putties remains and films on ceramic tiles, glass mosaics and natural stones.

epotech cleaner

KEA	SAP	P/EU
B35200006	100120428	epotech cleaner

*Given the wide variety of ceramic materials, glass mosaics and natural stones, we recommend to check with your tile provider about chemical resistance of the tiles before applying any cleaning product.

Before using any cleaning product, please perform a test or refer to the product's technical sheet.



Coverage:

10 l of clean water	100-200 ml
---------------------	------------

Packaging

Presentation	Box
1000 ml bottle	12 bottles



Coverage for 2 mm joint.

Tile	200 x 316 cm	20 m²/package
Tile	316 x 596 cm	33 m²/package
Tile	316 x 900 cm	37 m²/package
Tile	446 x 446 cm	35 m²/package
Tile	446 x 660 cm	42 m²/package
Tile	596 x 596 cm	47 m²/package

Packaging

Presentation	Box
125 ml package	12 applicators



Coverage for 2 mm joint.

Tile	200 x 316 cm	20 m²/package
Tile	200 x 446 cm	30 m²/package
Tile	316 x 596 cm	33 m²/package
Tile	316 x 900 cm	37 m²/package

Packaging

Presentation	Box
500 ml bottle	20 bottles

colorstuk sealer

Colorless, waterproof protector for cement based joints. It coats in depth and strengthens the grout. It protects against water, oils and accidental spills. It eases the cleaning of joints as it reduces water absorption.

Recommended uses:

- Sealing and protection for cement based grouts.



Coverage for 2 mm joint.

Tile	200 x 316 cm	40 m²/package
Tile	316 x 596 cm	65 m²/package
Tile	316 x 900 cm	74 m²/package
Tile	446 x 446 cm	70 m²/package
Tile	446 x 660 cm	83 m²/package
Tile	596 x 596 cm	94 m²/package

colorstuk sealer

KEA	SAP		P/EU
B87010002	100120427	colorstuk sealer	12.25 p/u

Packaging

Presentation	Box
125 ml package	16 applicators

non-slip tile

Non-slip treatment for glazed and unglazed ceramic tiles reducing the risk of slip and fall accidents. Indoor and outdoor use.

The non-slip treatment reacts with the ceramic tiles surface, generating thousands of microscopic bowls. These evenly distributed engravings increase the contact surface and, in the presence of water, produce a suction between the covering and the foot. This effect increases the coefficient of friction and reduces the risk of slip and fall accidents.



Recommended uses:

- Glazed and non-glazed ceramic floor tile coverings.
- Indoor and outdoor floor tile coverings.
- Built in shower trays.
- Do not apply on fibre shower trays and bathtubs.
- Do not apply on materials which are sensible to acid attack, like limestones or mortar substrates.

non-slip tile

KEA	SAP		P/EU
B33601002	100120430	non slip tile	35.50 p/u

Coverage

Ceramic tile	200 gr
--------------	--------

Packaging

Presentation	Box
500 ml bottle	20 bottles

	Glass mosaic	Glazed ceramic tiles	Porcelain
Remains of building work	acid net +	acid net +	acid net +
Cement	acid net	acid net	acid net
Gypsum	acid net	acid net	acid net
Epoxy putty	epotech cleaner	epotech cleaner	epotech cleaner
Remains of silicone	Vitroc ceramic scraper + Acetone	Vitroc ceramic scraper + Acetone	Vitroc ceramic scraper + Acetone
Efflorescence	acid net	acid net	acid net
Moss	Bleach	Bleach	Bleach

Daily maintenance	porce-clean	porce-clean	porce-clean
Food	porce-clean	porce-clean	porce-clean
Coffee, juices, sodas	basic gel	basic gel	basic gel
Lemon, vinegar	basic gel	basic gel	basic gel
Rust stains	acid net	acid net	acid net
Urine and vomit	acid net	acid net	acid net

Merbromin	Hydrogen peroxide	Hydrogen peroxide	Hydrogen peroxide
Iodine dye	Hydrogen peroxide	Hydrogen peroxide	Hydrogen peroxide
Macchie di sangue	Hydrogen peroxide	Hydrogen peroxide	Hydrogen peroxide

Oil, fat	basic gel	basic gel	basic gel
Motor oil	basic gel	basic gel	basic gel
Tar	Acetone	Acetone	Acetone
Paint, varnish, markers	Acetone	Acetone	Acetone
Adhesive and glue	Acetone	Acetone	Acetone
Rubber tires	Acetone	Acetone	Acetone

Waterproofing joints	colorstuk sealer	colorstuk sealer	colorstuk sealer
Joints cleaner	colorstuk cleaner	colorstuk cleaner	colorstuk cleaner
Anti-slip			non-slip tile

Given the wide range of mosaics and ceramics, it is recommended to consult the supplier of tiles about the chemical resistance. In any case, it is recommended to take a test.

We recommend the use on cleaning polished tiles, also with metal finish. Contact the supplier of tiles to know the chemical resistance. In any case, you have to take a test.

*Given the wide variety of ceramic materials, glass mosaics and natural stones, we recommend to check with your tile provider about chemical resistance of the tiles before applying any cleaning product.

Before using any cleaning product, please perform a test or refer to the product's technical sheet.



Waterproofing

Waterproofing

imperbox	118
imperband	120
bathroom drain	121
linear drains	122
imperband standard kit	124
imperband refurbishing kit	125
linear grids	126
squared grids	126
sylastic	128
terrace drain	129

Decoupling and waterproofing

lamitech n	130
------------	-----

Drainage

super drain	131
-------------	-----

imperbox

imperbox is paste, ready-to-use waterproofing system specially recommended for waterproofing plasterboard indoors. Compatible with type C2 cement-based adhesive as per EN 12004. Indoor use.

Paste with water-dispersed acrylic polymers that provide it with excellent bonding and deformability properties, which means it can be used over the most common types of substrates used in construction. Special pieces and bands available for waterproofing joints and other critical spots.



☒

bath environments

☒

terraces

☒

new building work

☒

cardboard plaster

☒

ceramic showers

☒

pools

imperbox

Features:

- Water-based paste.
- Indoor waterproofer.
- Excellent adherence. Flexible.
- Good chemical resistance.
- Quick and easy application.

Recommended use:

- Private bathrooms. Built in showers.
- Public toilets and showers.
- Spas and premises in permanently damp environments.
- Balconies, covered terraces, cornices and gutters.
- Adhesion promoter on old vinyl and polyurethane adhesives.
- Do not use in outdoors surfaces greater than 10 m².

Coverage:

Bond coat	
• One-layer application.	1,8 kg/m²
Waterproofing	
• Two-layer application.	3,6 kg/m²
Mean thickness per imperbox layer: 1.5 mm	

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Angles and waterproof bands:

Special pieces made of waterproof thermoplastic rubber, mounted on polyester sheets which allow laying with type C2 cement-based adhesives as per EN 12004. Specially designed for waterproofing critical spots.

1. **Inner angle:** Piece for sealing inner corners.
2. **Outer angle:** Piece for sealing outer corners.
3. **Waterproof band:** 8 cm wide waterproofing band for sealing edges, level changes and movement joints.

Substrates:

- Cement covered floors and walls .
- Anhydrite or plaster covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Plywood boards.



imperbox

KEA	SAP		P/EU
B84906005	100006223	imperbox manhattan	6,01 p/kg
B84900101	100006210	outer angle	7.65 p/u
B84900202	100006211	inner angle	7.65 p/u
B85900008	100081532	5 ml waterproof band	4,16 p/ml
B85900009	100081531	10 ml waterproof band	3,97 p/ml
B84905004	100006221	50 ml waterproof band	3.82 p/ml

Packaging

Presentation	Europallet
10 kg can	450 kg/pallet
Unit	
Unit	
5 m roll	
10 m roll	
50 m roll	



imperband

imperband is a waterproof sheet, specially designed for indoor waterproofing of ceramic wall and floor coverings.

It is a 0,5mm thick polymer membrane with a double thermoplastic polyolefin sheet and covered on both sides by non woven polyester fibers that allow it to be bonded to surfaces using cement-based adhesives. Ideal for use in new construction and refurbishment of showers and baths, and any indoor environment permanently affected by damp.



Wet areas

- ☒ bath environments
- ☐ terraces
- ☒ new building work
- ☒ refurbishing bathrooms
- ☒ ceramic showers
- ☐ pools

imperband

Features:

- Double thermoplastic polyolefin membrane covered on both sides by non woven polyester fibers.
- Maximum waterproofing with minimal thickness (0.5 mm).
- Direct installation of the tile on the sheet.
- Good chemical resistance.
- Quick and easy application.

Recommended use:

- Private bathrooms. Built in showers.
- Public toilets and showers.
- Spas and premises in permanently damp environments.
- Balconies and terraces smaller than 10 m².
- Do not use in outdoors surfaces greater than 10 m².

Installation:

- **imperband** sheet is compatible with type C2 cement-based adhesive as per EN 12004.
- In case of surfaces bigger than the length of the sheet, overlap two 10 cm sheets and bond with C2 adhesive.
- In waterproofing of floors, leave an excess of sheet of at least 10 cm in all the spots where floor meets the wall.
- Be extremely cautious when connecting the sheet to the drainage systems.
- Once the **imperband** sheet has been installed, cover with the chosen floor covering. Never leave exposed to direct sunlight.

Certifications/Standards:

Avis technique: CSTB 13/08-1035

imperband

KEA	SAP		P/EU
B84901001	100006213	imperband	12.75 p/m²
B84901006	100006218	imperband	13.24 p/m²

Packaging

Presentation	Europallet
30 m roll	720 m/pallet
5 m roll	300 m/pallet



bathroom drain

The **bathroom drain** from **butech** is a drain for built in shower trays. It features a wide dish around the grating, which ease the connection to the **imperband** waterproofing sheet. Available with horizontal and vertical outlet, it helps to solve easily and effectively indoor waterproofing and drainage.

The 10 cm connecting piece between the grating and the drain can be cut, so that it can be installed with glass mosaics up to natural stones. Includes steel grating.



Ceramic showers

- ☒ indoor
- ☐ outdoor
- ☒ new building work
- ☒ refurbishing bathrooms
- ☒ ceramic showers
- ☐ Concept XPS shower tray.

bath drain

Recommended use:

- Drain designed for connecting with **imperband** waterproofing sheet.
- Specially designed for waterproofing built in showers.
- Available with horizontal or vertical outlet

Bath drain complements

Bathroom drain connection:

Clamp for fixing imperband sheet to drain. Includes stainless steel clamp, rubber o-ring and 6 fixing screws.



Features for horizontal bathroom drain:

- 75 mm high drain.
- Discharge speed. 0.6 l/s.
- 50 mm horizontal outlet.
- 22 cm diameter crown for imperband fixation.
- Optional outlet for serial connections.
- Includes u-bend.
- 10 x 10 cm steel grating.



Features for vertical bathroom drain:

- 140 mm high drain.
- Discharge speed. 0.9 l/s.
- 50 mm vertical outlet.
- 26.5 cm diameter crown for imperband fixation.
- Includes u-bend.
- 10 x 10 cm steel grating.



Compensation piece:

Connection piece between drain and grating for installations with two overlaid waterproofing levels.
30.5 cm diameter crown for imperband fixation.
12.5 cm high piece.



Round grating:

Chromed plastic grating with a 10 x 10 cm round design. Includes chromed frame.



bath drain

KEA	SAP		P/EU
B82901001	100005822	40/50 horizontal drain	27.10 p/u
B82901002	100005823	50 vertical drain	33.49 p/u

B82901003	100005824	compensation piece	37.86 p/u
B82901004	100005825	bathroom drain connection	15.88 p/u
B82901005	100005826	round grating	52.03 p/u

Packaging

Presentation
1 u./box
1 u./box

1 u./box
1 u./box
1 u./box

linear drains

The **linear drains** from **butech** in AISI 304 stainless steel and polypropylene are an excellent solution for shower trays with ceramic tiles, natural stone or mosaic covering. These new design drains available in two sizes and in three different steel gratings, are an excellent complement for the PORCELANOSA Grupo bathroom settings.

These drains consist of a sewer, u-bend and decorative grating, and feature a wide ledge on which to glue the **imperband** waterproof sheet. Available for laying close to the wall and in the center of the shower, they help to solve easily and effectively indoor waterproofing and drainage.



Ceramic showers

- ☒ indoor
- ☐ outdoor
- ☒ new building work
- ☐ refurbishing bathrooms
- ☒ ceramic showers
- ☐ Concept XPS shower tray.

linear drains

Linear grating features:

- AISI 304 stainless steel grating
- Adjustable height; adaptable to the height of the shower wall covering.
- Available in 700 and 900 mm
- Steel and ceramic gratings can be installed with or without steel frame.
- 26.5 cm diameter crown for **imperband** fixation.
- Includes u-bend.

Linear drain standard grating: steel grating with traditional design.
Linear drain steel grating: steel grating with functional design. LIFESTYLE finish.
Linear drain ceramic grating: Special grating for bonding the same ceramics or mosaic than the rest of the built in shower.

Recommended use:

- Specially designed drain for waterproofing built in showers.
- Compatible with **imperband** waterproofing sheet.
- Horizontal outlet.

Linear wall drain features:

- Includes side piece for fixing to wall.
- Asymmetric finish frame for trim against wall.
- 135 mm high drain.
- Discharge speed. 0.8 l/s.
- 50 mm horizontal outlet.
- 150 mm diameter crown for **imperband** fixation.
- Includes u-bend.

Linear central drain features:

- Includes 4 regular height legs.
- Asymmetric frame for trim against wall.
- 140 mm high drain.
- Discharge speed. 0.8 l/s.
- 50 mm horizontal outlet.
- 208 mm diameter crown for **imperband** fixation.
- Includes u-bend.



linear wall drain

KEA	SAP		P/EU
B82902017	100078229	700 mm	286.20 p/u
B82902022	100090864	900 mm	298.50 p/u

Packaging

Presentation
1 u./box
1 u./box



wall grids

KEA	SAP		P/EU
B82902019	100078231	700 mm standard	110.80 p/u
B82902023	100090866	900 mm standard	123.10 p/u

B82902018	100078230	700 mm steel	307.70 p/u
B82902024	100090867	900mm steel	353.85 p/u

B82902016	100078228	700 mm ceramics	307.70 p/u
B82902025	100090868	900 mm ceramics	338.50 p/u

Packaging

Presentation
1 u./box
1 u./box



linear central drain

KEA	SAP		P/EU
B82902027	100090862	700 mm	304.65 p/u
B82902026	100090863	900 mm	323.10 p/u

Packaging

Presentation
1 u./box
1 u./box



central grids

KEA	SAP		P/EU
B82902032	100091722	700 mm standard	110.77 p/u
B82902028	100091723	900 mm standard	123.08 p/u

B82902029	100091718	700 mm steel	307.63 p/u
B82902030	100091719	900mm steel	353.85 p/u

B82902033	100091720	700 mm ceramics	307.69 p/u
B82902031	100091721	900 mm ceramics	338.50 p/u

Packaging

Presentation
1 u./box
1 u./box



imperband standard kit

The **standard imperband kit** is an indoor waterproofing system consisting of a PVC gutter thermowelded to a 150 x 225 cm waterproof sheet. Specially recommended for waterproofing shower trays in new building works. Residential use.

The waterproof sheet is an imperband type 0,5 mm thick polymer membrane with a double thermoplastic polyolefin sheet and covered on both sides by non woven polyester fibers that allow it to be bonded to surfaces using cement-based adhesives. The gutter features a compact design and multiple possibilities of outlet connections.



- ☒ indoor
- ☐ outdoor
- ☒ new building work
- ☒ refurbishing bathrooms
- ☒ ceramic showers
- ☒ Concept XPS shower tray.

imperband standard kit

Features:

- Maximum security, it eliminates leakage risks between waterproof sheet and drain piece.
- 150 x 225 cm waterproof sheet.
- Discharge speed. 0.6 l/s.
- Compact system, just 100 mm high.
- Adaptable to horizontal and vertical outlets. Asjustable outlet diameter: 40/50 mm.
- Includes u-bend.
- Direct installation of the tile on the waterproof sheet.
- Quick and easy application.

Recommended use:

- Specially designed for waterproofing built in showers.

Installation:

- Depending on the drainage pipe position, select one of the system outlets and seal the other outlet with the cap provided to that effect.
- Given the case, use the drain outlet diameter adapter and glue the drainage pipe.
- Before laying the ceramics of the shower tray, check that the gutter works correctly.
- Use the waterproof sheet in the same way as the **imperband** sheet.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone.

Substrates:

- Cement covered floors.
- Specially designed for **Concept XPS** shower trays, prefabricated polystyrene panels.

imperband kit

KEA	SAP	P/EU
B82902038	100103360	1.5 x 2.25 m standard 72.31 p/u

Packaging


Presentation
1 kit/box



imperband refurbishing kit

The **imperband refurbishing kit** is an indoor waterproofing system consisting of an extrathin PVC gutter thermowelded to a 150 x 225 cm waterproof sheet. Specially recommended for waterproofing shower trays in refurbishing jobs. Residential use.

The waterproof sheet is an **imperband** type 0.5 mm thick polymer membrane with a double thermoplastic polyolefin sheet and covered on both sides by non woven polyester fibers that allow it to be bonded to surfaces using cement-based adhesives. The only 65 mm drain height allows to carry out installations of 75 mm from the substrate to the ceramic wall covering.

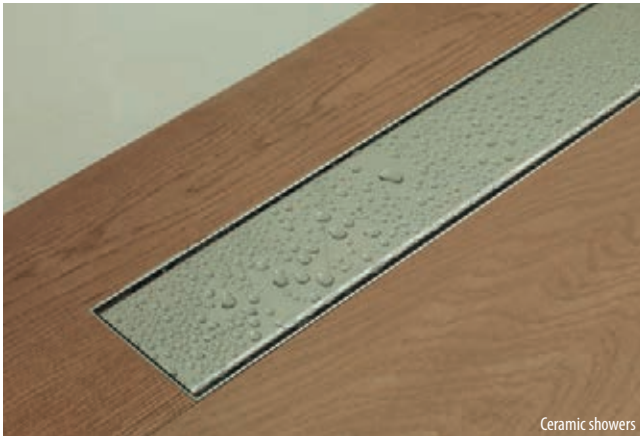

- ☒ indoor
- ☐ outdoor
- ☒ new building work
- ☒ refurbishing bathrooms
- ☒ ceramic showers
- ☒ Concept XPS shower tray.

imperband refurbishing kit

Features:

- Maximum security, it eliminates leakage risks between waterproof sheet and drain piece.
- 150 x 225 cm waterproof sheet.
- Discharge speed. 0.5 l/s.
- Very compact system, just 75 mm high.
- 50 mm diameter horizontal outlet.
- Includes u-bend.
- Direct installation of the tile on the waterproof sheet.
- Quick and easy application.

Recommended use:

- Specially designed for waterproofing showers in refurbishing jobs.

Installation:

- Connect the **imperband refurbishing kit** and check that the gutter works correctly.
- Use the waterproof sheet in the same way as the **imperband** sheet.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone.

Substrates:

- Cement covered floors.
- Specially designed for **Concept XPS** shower trays, prefabricated polystyrene panels.

imperband kit

KEA	SAP	P/EU
B82902037	100103361	1.5 x 2.25 mt refurbishing 90.77 p/u

Packaging

Presentation
1 kit/box



linear grids

gold

KEA	SAP		P/EU
B82902072	100130481	59,6 x 9,3 cm	445,00 p/u
B82902073	100130482	80 x 9,3 cm	590,00 p/u

glass white

KEA	SAP		P/EU
B82902078	100141155	120 x 9,3 cm	584,00 p/u
B82902079	100141156	59,6 x 9,3 cm	367,00 p/u
B82902081	100141157	80 x 9,3 cm	499,95 p/u

glass black

KEA	SAP		P/EU
B82902077	100141152	120 x 9,3 cm	584,00 p/u
B82902076	100141153	59,6 x 9,3 cm	367,00 p/u
B82902080	100141154	80 x 9,3 cm	499,95 p/u

ceramic

KEA	SAP		P/EU
B90200676	100119619	120 x 9,3 cm	495,00 p/u
B90200674	100119620	59,6 x 9,3 cm	274,00 p/u
B90200675	100119621	80 x 9,3 cm	365,00 p/u

white

KEA	SAP		P/EU
B82902067	100120375	120 x 9,3 cm	552,00 p/u
B82902065	100120376	59,6 x 9,3 cm	276,00 p/u
B82902066	100120377	80 x 9,3 cm	368,00 p/u

Packaging

Presentation
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box



chrome texture

KEA	SAP		P/EU
B82902044	100103364	120 x 9,3 cm	415.85 p/u
B82902045	100103365	59,6 x 9,3 cm	222.00 p/u
B82902042	100103366	80 x 9,3 cm	298.95 p/u

texture

KEA	SAP		P/EU
B82902047	100103367	120 x 9,3 cm	399.25 p/u
B82902036	100103368	59,6 x 9,3 cm	211.55 p/u
B82902048	100103369	80 x 9,3 cm	288.45 p/u

squared

KEA	SAP		P/EU
B82902035	100103370	120 x 9,3 cm	401.55 p/u
B82902041	100103371	59,6 x 9,3 cm	217.00 p/u
B82902039	100103372	80 x 9,3 cm	293.85 p/u

line

KEA	SAP		P/EU
B82902043	100103373	120 x 9,3 cm	401.55 p/u
B82902046	100103374	59,6 x 9,3 cm	217.00 p/u
B82902040	100103375	80 x 9,3 cm	293.85 p/u

square grids

standard

KEA	SAP		P/EU
B82902021	100089372	squared	15.51 p/u
B82902056	100114593	sun	42.70 p/u

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box
1 grating/box

Packaging

Presentation
1 grating/box
1 grating/box



squared

sun

sylastic

sylastic is a two-component cement-based waterproofer with excellent bonding and deformability features, specially recommended for waterproofing outdoors. Compatible with type C2 cement-based adhesive as per EN 12004. Indoor and outdoor use.

Prevents the need of screed between waterproofing sheet and ceramic floor, thus reducing the final system thickness. It is applied in two 1-2 mm layers each, with a fiberglass mesh reinforcement on the first application. Special pieces and bands available for waterproofing joints and other critical spots.



- ☒ bath environments
- ☒ terraces
- ☒ new building work
- ☒ refurbishing bathrooms
- ☒ ceramic showers
- ☒ pools

sylastic

Features:

- Two-component waterproofing mortar.
- Indoor and outdoor waterproofer.
- Maximum waterproofing with minimal thickness (3 mm).
- It allows for direct laying of ceramic tiles with cement-based adhesive.
- Excellent adherence and maximum deformability.
- Good chemical resistance.
- Suitable for direct contact with water.

Coverage:

Bond coat:			
• One-layer application.			
• Sylastic mortar		1,95 Kg / m ²	
• Sylastic additive		0,65 Kg / m ²	
Waterproofing:			
• Two-layer application.			
• Sylastic mortar		3,90 Kg / m ²	
• Sylastic additive		1,30 Kg / m ²	
Mean thickness per sylastic layer: 1.5 mm			

Recommended use:

- Waterproofing of bathrooms and showers.
- Spas and premises in permanently damp environments.
- Outdoor terraces and balconies.
- Pools and premises into direct contact with water.
- Cisterns and reservoirs into direct contact with water.
- Repair of cracked floors and renderings.
- Promotes adherence on existing ceramic wall tiles and on wood or metal substrates.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Cement covered floors and walls .
- Concrete slabs.
- Plasterboards.
- Wood boards.
- Existing floor tiles.
- Metal sheets.

sylastic

KEA	SAP		P/EU
B85900004	100072729	sylastic mortar	0.81 p/kg
B85900005	100072730	sylastic additive	9.90 p/kg
B84900303	100006212	50 m fiberglass mesh	2.75 p/m ²
B84905004	100006221	50 m waterproof band	3.82 p/ml
B84900101	100006210	outer angle	7.65 p/u
B84900202	100006211	inner angle	7.65 p/u

Packaging

Presentation	Europallet
24 kg bag	960 kg/pallet
8 kg can	320 kg/pallet
50 m ² reel	
50 m roll	
Unit	
Unit	



terrace drain

The **floor drain** from **butech** is a drain for terraces and outdoor floors. It features a wide dish around the grating, which ease the connection to waterproofing sheets. Available with horizontal and vertical outlet, it helps to solve easily and effectively outdoor waterproofing and drainage.

The 10 cm connecting piece between the grating and the drain can be cut, so that it can be installed with glass mosaics up to natural stones. Includes steel grating.



- ☒ indoor
- ☒ outdoor
- ☒ lamitech n
- ☒ sylastic
- ☒ new building work
- ☒ concept xps shower tray.

terrace drain

Recommended use:

- Drain designed for connecting with waterproofing sheet.
- Specially designed for waterproofing outdoor terraces and floors.
- Vertical outlet.

Terrace drain features:

- 190 mm high drain.
- Discharge speed. 1.6 l/s.
- 75 mm vertical outlet.
- 36 cm diameter crown for waterproofing sheet fixation.
- Includes u-bend.
- 143 x 143 mm steel grating.



Terrace drain complements

Terrace drain connection:

Clamp for fixing waterproofing sheet to drain. Includes stainless steel clamp, rubber o-ring and 6 fixing screws.



Compensation piece:

Connection piece between drain and grating for installations with two overlaid waterproofing levels.
30.5 cm diameter crown for waterproofing sheet fixation.
12.5 cm high piece.



Terrace drain

KEA	SAP		P/EU
B82901009	100005827	75 vertical drain	59.77 p/u
B82901010	100005828	compensation piece	40.65 p/u
B82901011	100005829	floor drain connection	26.88 p/u

Packaging

Presentation
1 u./box
1 u./box
1 u./box

lamitech n

lamitech n is a multilayer polymer sheet, specially designed for outdoor floors decoupling. Protects tiles against substrate tensions, reducing the risk of breakage and piece lifting. Suitable for outdoor waterproofing.

Coextruded HDPE/EVAC membrane, with one side covered with polyester fibers and the other one with polyester entwined felt, that allows laying with cement-based adhesives. Absorbs tensions, reducing their transmission to the ceramic floor. Indoor and outdoor use.



- ☒ bath environments
- ☒ terraces
- ☒ anti-cracks
- ☒ refurbishing
- ☒ ceramic showers
- ☒ pools

lamitech n

Features:

- Multilayer HDPE/EVAC polymer membrane covered with polyester fibers.
- Maximum outdoors waterproofing with minimal thickness (3,4 mm).
- It allows for direct laying of ceramic tiles with cement-based adhesive.
- Good chemical resistance.
- Improves impact noise reduction.
- Quick and easy application.

Recommended use:

- Decoupling of balconies and terraces.
- Waterproofing of outdoor floors.
- Laying of ceramics on wood substrates.
- Laying of floor tiles on cracked substrates. Terrace refurbishing.
- Laying of ceramics on substrates which are not set yet or present residual damp.

Installation:

- **lamitech n** sheet is compatible with type C2 cement-based adhesive as per EN 12004.
- Place sheets side by side, without overlappings. In case of using it as waterproofer, proceed to sealing sheet joints with **sylastic** waterproof mortar and **lamiband 200** waterproof band..
- In waterproofing of floors, lengthen the waterproofing with **lami-band 200** at least 10 cm in all the spots where floor meets the wall.
- In movement joints, use flexible tape **waterproof band**.
- Be extremely cautious when connecting the sheet to the drainage systems.
- Once **lamitech n** has been installed, lay the chosen floor with compatible adhesives. Never leave exposed to direct sunlight.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Cement or anhydrite covered floors.
- Concrete slabs.
- Existing floor tiles.
- Plywood boards.

lamitech n

KEA	SAP		P/EU
B85900011	100089879	lamitech n	13,14 p/m²
B84901005	100006217	200 mm lami-band	3,77 p/m
B84905004	100006221	waterproof band	3.82 p/m²
B85900004	100072729	sylastic mortero	0,81 p/kg
B85900005	100072730	sylastic aditivo	9,90 p/kg

Packaging

Presentation	Europallet
5 m reel	200 m²/pallet
30 m reel	
50 m roll	
24 kg bag	
8 kg can	



super drain

super-drain is an 8 mm thick drainage sheet for waterproofing systems in outdoor terraces and balconies. It eases water evacuation and reduces the risk of damp appearance. Suitable for floors as well as for walls.

Polyethylene sheet with a tridimensional structure. It features 20 mm diameter circular nerves and it is covered by a filtering fabric. Installed on the waterproofing system, it drains the water towards the drain and protects mechanically.



- ☒ bath environments
- ☒ terraces
- ☒ new building work
- ☒ refurbishing terraces
- ☒ drainage
- ☒ pools

super-drain

Features:

- Polyethylene sheet with tridimensional structure with 20 mm circles.
- Maximum drainage with a 5 mm thickness.
- Good chemical resistance.
- Quick and easy application.

Recommended use:

- Outdoor floors drainage. Terraces and balconies.
- Protection of ceramic floors against efflorescences.
- Reduction of the risk of substrate cracking.
- Protection of walls against damp.

Installation:

- **super-drain** sheet is directly installed on the waterproofing system with the filtering side facing up.
- In the case of surfaces bigger than 100 cm, overlap two **super-drain** sheets fitting at least three gap lines.
- Once the **super-drain** sheet laid, cover with a mortar at least 4 cm thick and leave the surface ready for laying tiles with the thin-bed method.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Waterproofing sheets and paints.
- Slopes are needed on the waterproofing substrate.

super-drain

KEA	SAP		P/EU
B84901004	100006216	super-drain	11.74 p/m²

Packaging

Presentation	Europallet
15 m² reel	135 m²/pallet






Acoustic insulation

Acoustic insulation

fonos (+)	134
fonomix 15/15 n	136
fonomix 15/40 n	137
fonopac R	138
fonopac R eco	139

fonos (+)

fonos (+) is a 5 mm thick cross-linked polyethylene foam sheet for the Acoustic insulation of floors. It reduces impact noise between slabs and reduces walking noise in floating floors.

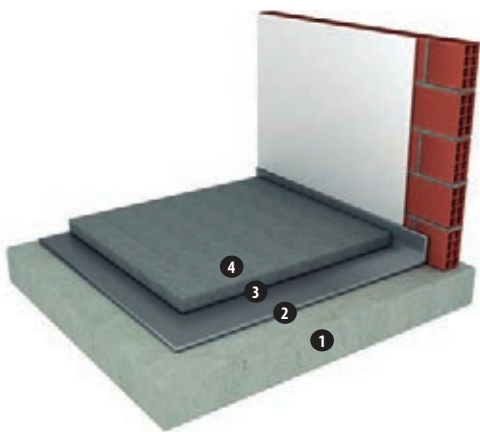

1- floor slab
2- fonos (+)
3- mortar screed
4- floor tile

fonos (+)

Features:

- Cross-linked polyethylene membrane.
 - Quick and easy application.
 - - Final thickness: 5 mm
 - - Density: 25 kg/m³
 - Weighted reduction of impact sound pressure level according to standard ISO 717-2
- $\Delta L_w = 21 \text{ dB}$

Installation:

- Lay without adhesives on the surface to be acoustically isolated.
- Overlap two 10 cm sheets and bond with adhesive tape.
- Leave an excess of sheet of at least 5 cm in all the spots where floor meets the wall.
- Be extremely cautious when laying the sheet to avoid tears and other acoustic bridges.
- Once the fonos (+) sheet has been laid, cover with the compression layer or with the chosen laminate.

Recommended uses:

- Reduces impact noise transmitted through floor slabs.
- Floor decoupling.

Materials:

- Ceramic floors and similar products adhered to the substrate.

Substrates:

- Concrete floor slabs.
- Cement covered floors.

fonos +

KEA	SAP	P/EU
B67900046	100113530	5 mm fonos (+) 2.15 p/m²


Packaging

Presentation
100 m² reel



fonomix 15/15 n

fonomix 15/15 n is a 3 mm thick multilayer sheet for acoustic conditioning of floors. Formed by a 2 mm thick cross-linked polyethylene foam sheet bonded to a 1.2 mm EPDM sheet, it reduces airborne noise and reduces the transmission of impact noise through floor slabs.

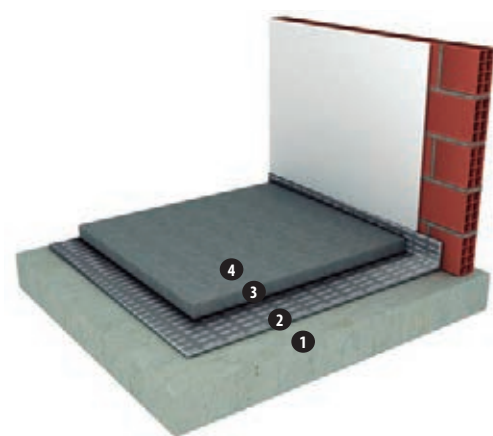

1- floor slab
2- **fonomix 15/15 n**
3- mortar screed
4- floor tile

fonomix 15/15 n

Features:

- Sheet formed by two layers, a 1,2 mm thick EPDM layer and a 2 mm thick cross-linked polyethylene foam sheet.
- Quick and easy application.
- - Dimensions: 1 x 10 m
- - Final thickness: 3,2 mm
- - Weight: 2 kg/m²
- Weighted reduction of impact sound pressure level according to standard ISO 717-2

$\Delta L_w = 19 \text{ dB}$

Installation:

- Lay without adhesives on the surface to be acoustically isolated.
- Overlap two 10 cm sheets and bond with **cintex**.
- Lengthen the sheet over the final floor level in all the spots where floor meets the walls.
- Be extremely cautious when laying the sheet to avoid tears and other acoustic bridges.
- Once **fonomix 15/15 n** has been laid, cover with the mortar layer until the laying level is reached.

Recommended uses:

- Reduces impact noise transmitted through floor slabs.
- Floor decoupling.

Materials:

- Ceramic floors and similar products adhered to the substrate.
- Laminate floors.

Substrates:

- Concrete floor slabs.
- Cement covered floors.

fonomix 15/15 n


KEA	SAP	P/EU
B67900042	100102274	fonomix 15/15 n
		14.14 p/m²
B61901001	100004399	cintex
		22.19 p/u

Packaging

Presentation
10 m² reel
50 m reel

fonomix 15/40 n

fonomix 15/40 n is a 5,8 mm thick multilayer sheet for acoustic conditioning of floors. Formed by a 4 mm thick cross-linked polyethylene foam sheet bonded to a 1,8 mm EPDM sheet, it reduces airborne noise and reduces the transmission of impact noise through floor slabs.

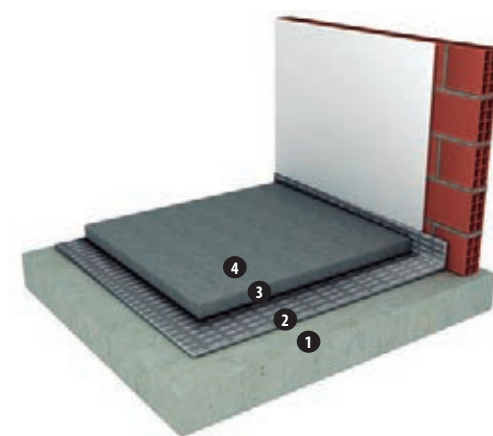

1- floor slab
2- **fonomix 15/40 n**
3- mortar screed
4- floor tile

fonomix 15/40 n

Features:

- Sheet formed by two layers, a 1,8 mm thick EPDM layer and a 4 mm thick cross-linked polyethylene foam sheet.
- Quick and easy application.
- - Dimensions: 1,1 x 6 m
- - Final thickness: 5,8 mm.
- - Weight: 3,6 kg/m²
- Weighted reduction of impact sound pressure level according to standard ISO 717-2

$\Delta L_w = 24 \text{ dB}$

Installation:

- Lay without adhesives on the surface to be acoustically isolated.
- Overlap two 10 cm sheets and bond with cintex.
- Lengthen the sheet over the final floor level in all the spots where floor meets the walls.
- Be extremely cautious when laying the sheet to avoid tears and other acoustic bridges.
- Once **fonomix 15/40 n** has been laid, cover with the mortar layer until the laying level is reached.

Recommended uses:

- Reduces impact noise transmitted through floor slabs.
- Floor decoupling.

Materials:

- Ceramic floors and similar products adhered to the substrate.

Substrates:

- Concrete floor slabs.
- Cement covered floors.

fonomix 15/40 n


KEA	SAP	P/EU
B67900043	100102275	fonomix 15/40 n
		17.07 p/m²
B61901001	100004399	cintex
		22.19 p/u

Packaging

Presentation
6.6 m² reel
50 m reel

fonopac R

fonopac R is a multilayer sheet for isolating ceramic or natural stone floors against impact noise. Made of synthetic rubber, it combines a good Acoustic insulation with a low compressibility, allowing for direct laying of ceramic tiles. Specially recommended for refurbishing of floors.

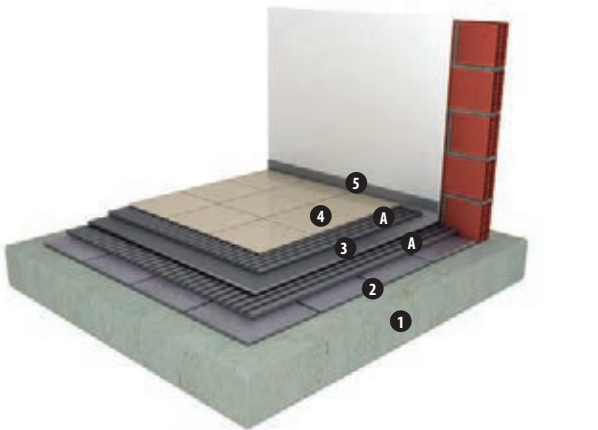

1- floor slab
2- old floor tile
3- **fonopac R**
4- floor tile
5- bandin
A- cement-based adhesive + **fonolax**

fonopac R

Features:

- Sheet made of synthetic rubber and TPO..
- Allows direct laying of tiles, with no need for compression layers.
- Compatible with cement-based adhesives.
- Dimensions: 60 x 100 cm
- Final thickness: 3 mm
- Weight: 1,42 kg/m²
- Weighted reduction of impact sound pressure level according to standard ISO 717-2

$\Delta L_w = 16 \text{ dB}$

Installation:

- Cover the whole floor perimeter with acoustic isolating tape **bandin**.
- Laying of the sheets by the thin-bed method, with **super-one n** adhesive mixed with **fonolax**.
- Seal the joints between sheets with **cintex** tape.
- Be extremely cautious when laying the sheet to avoid tears and other acoustic bridges.
- Once **fonopac R** sheets laid, lay the ceramic floor with **super-one n** mixed with **fonolax**.

Recommended uses:

- Reduces impact noise in indoor floors.
- Reduces impact noise in refurbishing of floors.

Materials:

- Ceramic floors and similar products adhered to the substrate.
- Laminate floors.

Substrates:

- Cement covered floors.
- Existing wall tiles.

fonopac R

KEA	SAP		P/EU
B67900038	100082628	fonopac R	16.58 p/m²
B61901006	100004402	bandin	17.24 p/u
B61901001	100004399	cintex	22.19 p/u
B64902002	100004463	fonopac R kit contents	322.92 p/u
B67900038	100082628	fonopac R	
B12909011	100031189	super-one n gris	
B51602002	100004377	fonolax	
B61901006	100004402	bandin	
B61901001	100004399	cintex	


Packaging

Presentation
100 x 60 cm sheets
20 m reel
50 m reel
Total 8.4 m²
14x 100x60 cm sheets
2x 25 kg bags
1x 5 kg can
1x 20 m reel
1x 50 m reel

fonopac R eco

fonopac R eco is a multilayer sheet for isolating ceramic or natural stone floors against impact noise.

Made of recycled materials, it combines a good Acoustic insulation with a low compressibility, allowing for direct laying of ceramic tiles. Specially recommended for refurbishing of floors.

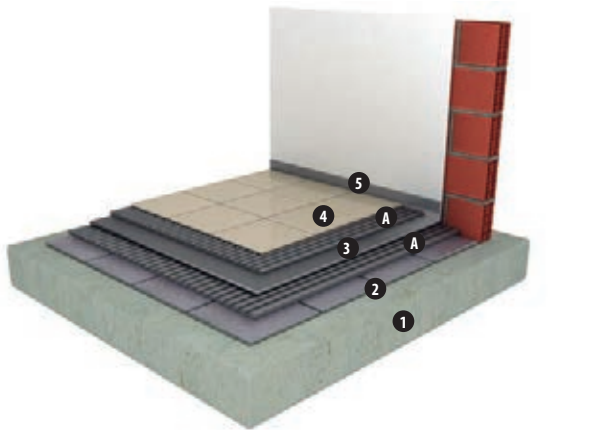

1- floor slab
2- old floor tile
3- **fonopac R eco**
4- floor tile
5- bandin
A- cement-based adhesive

fonopac R eco

Features:

- Sheet made of rubber and recycled EVAC polyolefins: 98 % recycled material.
- Allows direct laying of tiles, with no need for compression layers.
- Compatible with cement-based adhesives.
- Dimensions: 0,5 x 10 m
- Final thickness: 7 mm.
- Weight: 4 kg/m²
- Weighted reduction of impact sound pressure level according to standard ISO 717-2

$\Delta L_w = 16 \text{ dB}$

Installation:

- Cover the whole floor perimeter with bandin acoustic isolating tape.
- Laying of the Acoustic insulation sheet by the thin-bed method with **super-one n** adhesive.
- Overlap two sheets and bond with **cintex**.
- Be extremely cautious when laying the sheet to avoid tears and other acoustic bridges.
- Once **fonopac R** sheets laid, lay the ceramic floor with **super-one n**.

Recommended uses:

- Reduces impact noise in indoor floors.
- Reduces impact noise in refurbishing of floors.

Materials:

- Ceramic floors and similar products adhered to the substrate.

Substrates:

- Cement covered floors.
- Existing wall tiles.

fonopac R eco

KEA	SAP		P/EU
B67900044	100104576	fonopac R eco	15.50 p/m²
B61901006	100004402	bandin	17.24 p/u
B61901001	100004399	cintex	22.19 p/u
B12909011	100031189	super-one n gris	0.97 p/kg

Packaging

Presentation
5 m² reel
20 m reel
50 m reel
25 kg bag
1000 kg/pallet



Electric Radiant Floor Heating

electric radiant floor heating
electric radiant floor heating

electric radiant floor heating

The **electric radiant floor heating** from **butech**, also know as **ERFH**, is a heating system with an electric element for radiant floors, specially designed to provide comfort in ceramic floors in bathrooms and, in general, all kinds of floors walked barefoot. The **ERFH** system consists of an electric element and a digital thermostat timer.

The electric element is a 5 mm diameter heating wire that transforms electric energy into heating. Never cut this kind of wire. Maximum power is 150 W/m².

User-friendly digital thermostat that regulates the turn on and off and heating power of the system.



- ☒ indoor
- ☐ outdoor
- ☒ new building work
- ☒ refurbishing homes
- ☒ bath environments
- ☒ living rooms

electric radiant floor heating

Features:

- Easy, quick and economic installation. No maintenance costs.
- Avoids the installation of radiators on the walls.
- Ideal for homes not connected to the gas distribution network.
- Applicable in floors where a water pipe heating cannot be installed.
- More uniform heat distribution to all the surface of the room.
- More pleasant elevation of heat distribution .
- No air movement.

- Voltage: 230 V – 50/60 Hz
- Maximum charge: 16 Amp / 230 V max
- Maximum temperature: + 40°C

Installation:

- Professional heating system. Please contact authorized electrical installers.
- Choose the radiant mesh that suits the surface to be heated.
- In case of surfaces bigger than 10 m², connect meshes in parallel in a connection box.
- Do not connect meshes with a total surface bigger than 20 m² to one thermostat.
- Never cut the heating wire.
- Do not install under static elements and less than 10 cm from the walls.
- Never drill a floor where a radiant heating has been installed.

Guarantee:

- Thermostat guarantee: 2 years
- Electric mesh guarantee: 10 years

Recommended uses:

- Radiant heating in home refurbishings.
- General heating of homes.
- Comfort and auxiliary heating in bathrooms and dressing rooms.
- Comfort and auxiliary heating in spas and premises with permanent dampness.
- Comfort and auxiliary heating in locker rooms, recreational and sports premises.
- Heating of indoor areas with high ceilings.
- Temporary heating of workplaces.
- Do not use in outdoor floors.

Materials:

- Absorbent ceramics and porcelain tiles (water absorption < 0.5% as per EN-ISO 10545-3).
- Natural stone and marble not prone to staining.
- Wooden floors bonded to the substrate.
- Do not use under floating floors.
- Do not use under material sensible to heat.



electric radiant floor heating

KEA	SAP	electric radiant floor heating	P/EU
B62902151	100086601	ERHF 1 m² (150w) n	166,20 p/ud
B62902162	100086615	ERHF 2 m² (150w) n	235,09 p/ud
B62902158	100086617	ERHF 3 m² (150w) n	315,82 p/ud
B62902161	100086619	ERHF 4 m² (150w) n	391,17 p/ud
B62902157	100086621	ERHF 5 m² (150w) n	450,37 p/ud
B62902154	100086623	ERHF 6 m² (150w) n	493,43 p/ud
B62902163	100086625	ERHF 7 m² (150w) n	568,77 p/ud
B62902166	100086627	ERHF 8 m² (150w) n	644,12 p/ud
B62902135	100073467	ERHF 10 m² (150w) n	629,70 p/ud
B62902164	100086628	ERHF digital thermostat n	163,18 p/ud
B62902119	100045634	ERHF analogic thermostat n	90,20 p/ud
B62901102	100004419	ERHF reparation kit	15,59 p/ud

Packaging

Contents	Presentation
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only mesh	1 mesh/box
only thermostat	1 thermostat/box
only thermostat	1 thermostat/box
	1 kit/box



concept xps

concept xps panels

concept xps panels	146
Fixing elements for concept xps panels	147
Technical features	153
General instructions for installation	153

concept xps shower trays

concept xps shower trays	154
Standard shower trays	156
Refurbishing shower trays	158
Custom shower trays	160
Bespoke standard shower trays	162
Bespoke refurbishing shower trays	164

concept xps showers

Altea concept shower	167
Victoria corner concept shower	167
Niágara concept shower	168
concept benches	168
Iguazú concept cabin	169

concept xps panel

concept xps panels are extruded polystyrene panels ready for laying wall tiles, mosaics or natural stone with cement-based adhesives. Polystyrene lightness and easy handling, as well as its mechanical resistance and damp resistance make of this panel the perfect substrate for all kinds of environments where damp is present.

This kind of panel is available in thicknesses ranging from 4 to 80 mm and also in special precut boards that allow for a fast installation of curved shapes.



Features:

- Extruded polystyrene boards covered on both sides with waterproof cement mortar.
- Non-absorbent material. Its structure prevents water buildup. Resistant to dampness.
- Excellent surface for laying rectified tiles.
- Low thermal conductivity coefficient.
- Good soundproofing against impact noise.
- Easy handling and transport.
- Quick and clean installation.
- Resistant to microorganism attack.
- Inert, harmless, 100% recyclable material.
- Fire resistant: B1 as per DIN 4102.

Substrates:

- Usual indoor substrates in the building industry.
- Uncovered brick partition walls.
- Concrete floor slabs.
- Existing wall and floor tiles.
- Self-supporting indoors. Only 50 and 80 mm boards.

Recommended uses:

- Preparation of substrates for ceramic tiles laying. Specially recommended in refurbishing jobs.
- Bathroom countertops and vanities in permanently wet areas.
- Bathroom partition walls and platforms.
- Bathtub skirts and shower cabins.
- Shelves and panels attached to partition walls.
- Health resorts, saunas and spa premises.
- Thermal insulation of electric radiant heating floors.

Materials:


- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

concept xps panels

KEA	SAP		P/EU
B88000286	100103351	4 mm 1250 x 600	18,75
B88000287	100103352	6 mm 1250 x 600	18,75
B88000289	100103349	10 mm 2500 x 600	42,00
B88000288	100103350	20 mm 2500 x 600	44,00
B88000292	100103354	30 mm 2500 x 600	45,34
B88000293	100103355	50 mm 2500 x 600	52,41
B88000291	100103356	80 mm 2500 x 600	81,94

Packaging

u./pallet
150
150
120
100
68
40
24

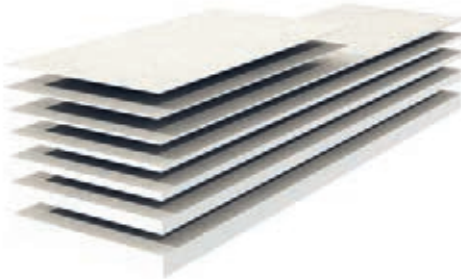

concept panels precut v

KEA	SAP		P/EU
B88000450	100116229	20 mm 2500 x 600	89,10
B88000444	100116230	30 mm 2500 x 600	99,90
B88000488	100117328	50 mm 2500 x 600	121,95
B88000485	100117329	80 mm 2500 x 600	129,95

Packaging

u./pallet
100
68
40
24



Fixing elements for concept xps panels

concept union

KEA	SAP	concept	P/EU
B88000002	100062797	50 mm U shape	14,49
B88000026	100062798	80 mm U shape	14,49
B88000029	100062791	50 mm H shape	29,11
B88000031	100062792	80 mm H shape	33,20
B88000003	100062795	50 mm T shape	25,95
B88000001	100062796	80 mm T shape	25,95
B88000030	100062793	50 mm L shape	25,95
B88000008	100062794	80 mm L shape	25,95

Packaging

Presentation
4 u. bag
4 u. bag
4 u. bag
4 u. bag
4 u. bag
4 u. bag
4 u. bag
4 u. bag



concept fastening

KEA	SAP		P/EU
B88000042	100067686	45 mm metal fastening	32,10
B88000017	100062773	130 mm plastic fastening	9,22
B88000028	100062774	130 mm plastic fastening	42,81
B88000021	100062775	80 mm plastic fastening	6,93
B88000013	100062776	80 mm plastic fastening	29,65
B88000014	100062790	concept bathtub skirt	25,63

Packaging

Presentation
50 u. bag
10 u. bag
50 u. bag
10 u. bag
50 u. bag
6 u. bag



Self-adhesive fiberglass mesh roll

KEA	SAP		P/EU
B88000012	100062825	self-adhesive fiberglass mesh	9,56
B88000009	100062826	self-adhesive fiberglass mesh	16,47

Packaging

Presentation
10 m roll
20 m roll



Polyurethane putty

KEA	SAP		P/EU
B82401003	100005820	P-404 black	6,20

Packaging

Presentation
25 cartridges x box





Indoor partition walls.

concept xps 50 and concept xps 80 panels allow to create partition walls, partitions and, in general, any built in element in a bathroom. Using them reduces execution times and provides a perfect substrate for laying rectified ceramics or glass mosaic.

concept xps panels			
KEA	SAP		P/EU
B88000293	100103355	2.500 x 600 x 50	52,41
B88000291	100103356	2.500 x 600 x 80	81,94

Refer to union and fastening elements on page 9.



Bathtub skirts.

concept xps 30 panels allow to create bathtub skirts in a fast and easy way. Specially recommended for whirlpool baths and in general for any kind of installation to which you need access once it has been installed.

There are adjustable height special pieces for the skirt base.

KEA	SAP		P/EU
B88000292	100103354	concept xps 30 panel 2.500 x 600 x 30	45,34

Refer to union and fastening elements on page 9.





Platforms and steps.

concept xps panels can replace, in bathrooms, any kind of building or wood work, reducing execution times and improving the final result. Specially recommended in projects with limitations for use overload.

concept xps panels			
KEA	SAP		P/EU
B88000292	100103354	2.500 x 600 x 30	45,34
B88000293	100103355	2.500 x 600 x 50	52,41
B88000291	100103356	2.500 x 600 x 80	81,94

Refer to union and fastening elements on page 9.



Furniture and countertops.

concept xps panels can replace, in bathrooms, any kind of building or wood work, reducing execution times and improving the final result. Specially recommended in projects where the presence of water advises against the use of wood.

There are reinforcement elements for the installation of countertops and shelves.

concept xps panels			
KEA	SAP		P/EU
B88000288	100103350	2.500 x 600 x 20	44,00
B88000292	100103354	2.500 x 600 x 30	45,34
B88000293	100103355	2.500 x 600 x 50	52,41
B88000291	100103356	2.500 x 600 x 80	81,94

Refer to union and fastening elements on page 9.





Wall and floor covering.

concept xps panels are an excellent solution for covering walls and floors prior to laying ceramics. Specially recommended in refurbishing jobs where, apart from preparing the substrate for laying ceramics, you need to waterproof and thermally isolate the substrate.

This kind of panel can be directly installed on the substrate with adhesive spots or installed on a plasterboard-type metallic structure.

concept xps panels

KEA	SAP		P/EU
B88000286	100103351	1.250 x 600 x 4	18,75
B88000287	100103352	1.250 x 600 x 6	18,75
B88000289	100103349	2.500 x 600 x 10	42,00
B88000288	100103350	2.500 x 600 x 20	44,00

Refer to union and fastening elements on page 9.



Technical features.

Properties	Standard	Unit of measure	Value
Determination of deformation under specified compressive loads and temperature.	UNE EN 1605	deformation %	1.1 (mean value)
Compressive strength (for a 10% deformation)	UNE EN 826	kPa	80 to 210 197 (mean value)
Apparent density	UNE EN 1602	kg/m³	32.4 (mean value)
Bending strength	UNE EN 12089	kPa	2422
Tensile strength perpendicular face of panel.	UNE EN 1607	kPa	310 to 420 360 (mean value)
Long-term water absorption by immersion.	UNE EN 12087	kg/m²	0.76 (mean value)
Long-term water absorption by immersion.	UNE EN 12087	volume %	7.3 (mean value)
Water vapor permeability.	UNE EN 12086	μ (water vapor diffusion resistance)	44
Thermal conductivity.	UNE EN 12667	W/(mK)	0.0336
Working temperature range.		°C	-50/+75
Dimensional tolerance of panels.		mm	Thickness +/-2 Length +/-2 Width +/-2 Squareness +/-2 in 1000 mm
Fire resistance.	DIN 4102		B1 not easily flammable

General instructions for installation

- Measure accurately the surface to be covered and transfer the measures to the **concept xps** panel.
- Before installing the **concept xps** panel on the surface to be covered, clean and remove any element which could compromise the bonding.
- Depending on the panel thickness, cut with a cutter or a hand saw. Once cut, remove irregularities from the cut sides using a sanding paper.
- Use **super-one n**, type C2S1 FTE cement-based adhesive, to bond the **concept xps** panel on flat surfaces. On even surfaces, we recommend to use a notched trowel, while on uneven surfaces, the use of adhesive spots (5 spots/m²) is recommended.
- Use **concept 45 metal fasteners** (fixing screws) for installing panels on wooden substrates (5 fasteners/m²). Specially recommended on plywood substrates.
- Use **p-404**, polyurethane putty, for the union of panels, sealing of joints and bonding of panels.
- Use **plastic fasteners** (fixing screws) to reinforce cross union of panels. Specially recommended for corners.
- Use the self-adhesive fiberglass mesh to reinforce unions between boards and cover with a layer of **super-one n** adhesive. In the case you need to waterproof the joint, use **sylastic** waterproof mortar.
- In partition walls, use different kinds of **concept xps** unions to fix the boards to the substrate. We recommend the use of a U type union every 60 cm.
- In partition walls, we recommend to use an H type union every 100 cm to reinforce the union between adjacent boards.
- Use cut pieces from a **concept xps** panel to create structures and shapes to be covered with ceramics or mosaic. Specially recommended in platforms, steps, shelves and furniture in general.
- Once the **concept xps** installed, lay the chosen wall covering with **super-one n** adhesive and seal the joints with **colorstuk rapid**, type CG2 colored grout for joints. In Turkish baths and environments with high concentrations of water vapor, replace grout with **epotech aqua** epoxy putty.

concept xps shower trays

It is a prefabricated system for creating built in shower trays. They include the slopes for the correct water drainage, as well as the drain and the waterproofing system. This system is supplied ready to use, which reduces working times while guarantees a perfect substrate for laying mosaic, natural stone or ceramics.

concept xps shower tray is light, resistant and safe, reason why it is specially recommended in bathroom refurbishing jobs. It includes **imperband kit** as a drain and waterproofing system, but it does not include the decorative grating, so you can choose among a wide range of sizes, shapes and finishes.



Features:

- Prefabricated shower tray made of extruded polystyrene covered with cement mortar.
- It includes slopes for water drainage.
- Double waterproofing: covering consisting of waterproof mortar and imperband sheet.
- It includes **imperband kit** for waterproofing the shower tray and the adjustment piece.
- Available in two options:
 - **imperband standard kit:** 40 mm high
 - **imperband refurbishing kit:** 30 mm high
- Available for square as well as for linear drains.

• Compression resistance (10% crush risk):	DIN 3421	0.3 N / mm²
• Initial thermal conductivity:	DIN 2612	0.0336 W/m²K
• Flammability:	DIN 4102	B1

concept shower tray selection guide

1. Depending on the drain outlet, select the type of **concept xps** shower tray to be used:

- | | |
|----------------------|---|
| - Vertical outlet: | Standard tray |
| - Horizontal outlet: | Select depending on the shower tray height. |

2. Depending on the shower tray height, select the type of **concept xps** tray to be used:

- 75–100 mm height **Refurbishing shower tray**
- > 100 mm height **Standard shower tray**

3. Select the type of decorative grating:

- | | |
|-------------------|--------------------------------|
| - Square grating: | Shower tray for square grating |
| - Linear grating: | Shower tray for linear grating |
- Linear grating**

Recommended uses:

- Specially designed for waterproofing built in showers.

Materials:

- Absorbent and non-absorbent ceramic tiles. Porcelain tiles with a water absorption < 0.5% as per EN-ISO 10545-3.
- Glass mosaic.
- Natural stone and marble not prone to staining.

Substrates:

- Concrete floor slabs.
- Cement covered floors.

4. Select the grating position:

- ESQ: Grating on a corner.
- CENT: Grating in a central position.
- LAT: Grating in a lateral position.

5. Select the shower tray shape:

- Square shower tray.
- Rectangular shower tray.

6. Choose the shower tray among the available sizes.

In the case that the available sizes do not fit in the project needs, there is the possibility of making custom shower trays.




Standard shower trays for square grating

These shower trays feature a 40 mm thickness.
It includes the **imperband standard kit**.
Does not include the **square grating**.

concept xps shower trays


ESQ Corner grating			
KEA	SAP	Square tray	P/EU
B88000240	100103276	900x900x40	275,50
B88000214	100103236	1000x1000x40	282,00
B88000210	100103249	1200x1200x40	306,50
B88000237	100103263	1500x1500x40	419,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

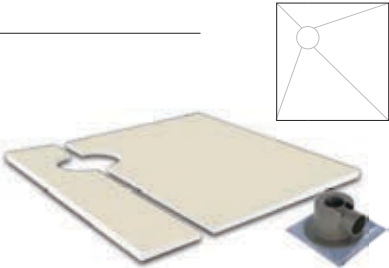


CENT Central grating			
KEA	SAP	Square tray	P/EU
B88000230	100103275	900X900x40	276,00
B88000206	100103235	1000x1000x40	282,00
B88000236	100103248	1200x1200x40	306,50
B88000207	100103262	1500x1500x40	419,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

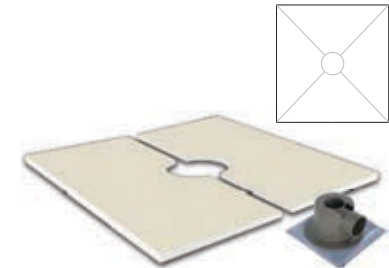


LAT Lateral grating			
KEA	SAP	Rectangular shower tray	P/EU
B88000220	100103251	1200X900x40	283,90
B88000217	100103247	1200X1000x40	284,20
B88000234	100103257	1400X900x40	306,00
B88000204	100103265	1500X900x40	312,00
B88000227	100103267	1600X900x40	322,00
B88000307	100108080	1800X900X40	469,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

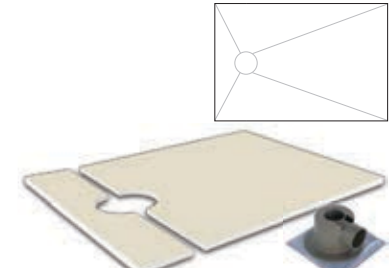

CENT Central grating			
KEA	SAP	Rectangular shower tray	P/EU
B88000213	100103237	1000X800x40	269,00
B88000212	100103250	1200X900x40	284,00
B88000225	100103246	1200X1000x40	284,50
B88000216	100103256	1400X900x40	306,00
B88000239	100103264	1500X900x40	315,00
B88000218	100103266	1600X900x40	322,00
B88000232	100103270	1800X900X40	338,50

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

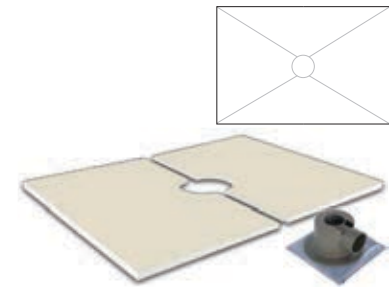

Square gratings

Square gratings			
KEA	SAP	Square grating	P/EU
B82902021	100089372	squared	15,51
B82902056	100114593	sun	42,70

Packaging
Presentation
1 grating/box
1 grating/box




Standard shower trays for linear grating

These shower trays feature a 40 mm thickness.
It includes the **imperband standard kit**.
Does not include **linear gratings**.

concept xps shower trays


LINEAR LAT Q Linear grating			
KEA	SAP	Square tray	P/EU
B88000296	100105151	900X900x40	610,00
B88000376	100114468	1000x1000x40	620,00
B88000299	100106439	1200x1200x40	812,00
B88000370	100114485	1500x1500x40	950,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

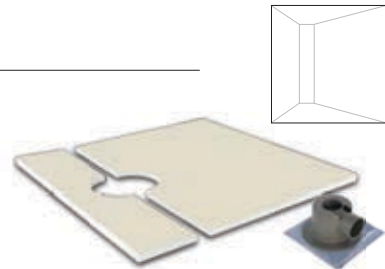


LINEAR CENT Q Linear grating			
KEA	SAP	Square tray	P/EU
B88000369	100114496	900X900x40	610,00
B88000363	100114467	1000x1000x40	620,00
B88000365	100114477	1200x1200x40	812,00
B88000366	100114484	1500x1500x40	950,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

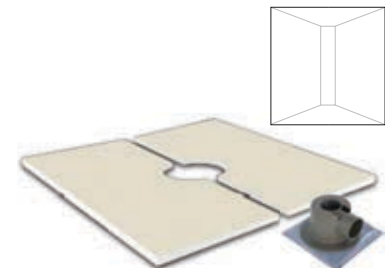


LINEAR LAT R Lateral grating			
KEA	SAP	Rectangular shower tray	P/EU
B88000303	100106437	1000X900x40	610,00
B88000295	100105150	1200X900x40	620,00
B88000304	100106438	1200X1000x40	625,00
B88000302	100106440	1400X900x40	640,00
B88000300	100106441	1500X900x40	675,00
B88000374	100114491	1600X900x40	690,00
B88000319	100108880	1800X900X40	710,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

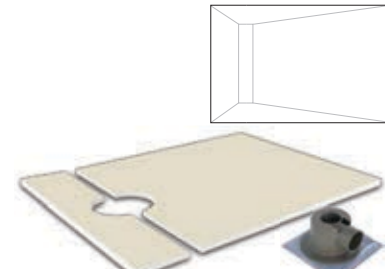

LINEAR CENT R Central grating			
KEA	SAP	Rectangular shower tray	P/EU
B88000387	100114470	1000X800x40	600,00
B88000388	100114479	1200X900x40	620,00
B88000373	100114474	1200X1000x40	625,00
B88000381	100114482	1400X900x40	640,00
B88000393	100114488	1500X900x40	675,00
B88000371	100114490	1600X900x40	690,00
B88000385	100114493	1800X900X40	710,00

Packaging
Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

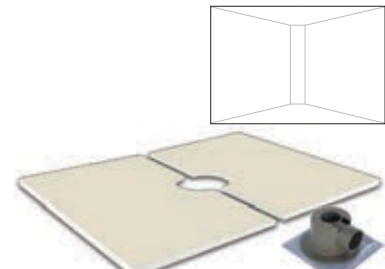

Linear gratings

Information referring to linear gratings is on page 126-127.



Refurbishing shower trays for square grating

These shower trays feature a 30 mm thickness.
It includes the **imperband refurbishing kit**.
Does not include the **square grating**.


concept xps shower trays

ESQ Corner grating

KEA	SAP	Square tray	P/EU
B88000260	100103297	900X900x30	294,00
B88000249	100103282	1000X1000x30	301,00
B88000256	100103295	1200X1200x30	325,00
B88000285	100103312	1500X1500x30	438,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

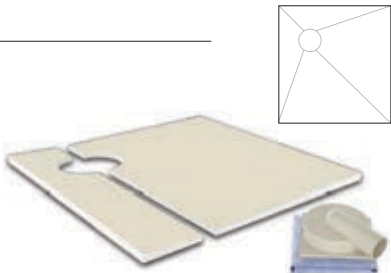


CENT Central grating

KEA	SAP	Square tray	P/EU
B88000257	100103296	900X900x30	294,00
B88000247	100103281	1000X1000x30	301,00
B88000252	100103294	1200X1200x30	325,00
B88000271	100103311	1500X1500x30	438,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

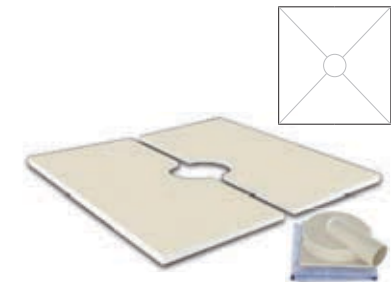


LAT Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000262	100103300	1200X900x30	302,50
B88000259	100103293	1200X1000x30	303,00
B88000264	100103306	1400X900x30	324,00
B88000279	100103314	1500X900x30	330,00
B88000282	100103316	1600X900x30	341,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

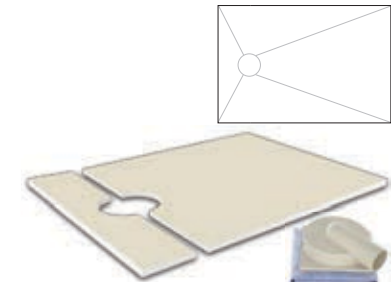


CENT Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000253	100103283	1000X800x30	287,00
B88000261	100103299	1200X900x30	302,50
B88000248	100103292	1200X1000x30	303,00
B88000277	100103305	1400X900x30	324,00
B88000283	100103313	1500X900x30	330,00
B88000272	100103315	1600X900x30	341,00
B88000269	100103319	1800X900x30	357,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

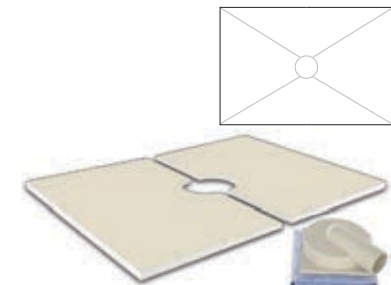

All the **concept xps** shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.

Refurbishing shower trays for linear grating

These shower trays feature a 30 mm thickness.
It includes the **imperband refurbishing kit**.
Does not include **linear gratings**.


concept xps shower trays

LINEAR LAT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000367	100114495	900X900x30	610,00
B88000380	100114466	1000X1000x30	620,00
B88000378	100114476	1200X1200x30	812,00
B88000439	100116128	1300X1300x30	950,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

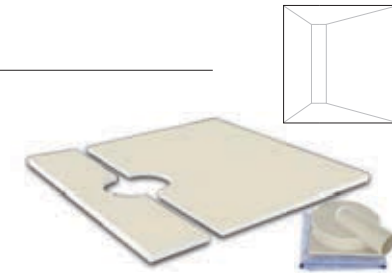


LINEAR CENT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000390	100114494	900X900x30	610,00
B88000362	100114465	1000X1000x30	620,00
B88000383	100114475	1200X1200x30	812,00
B88000392	100114483	1500X1500x30	950,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

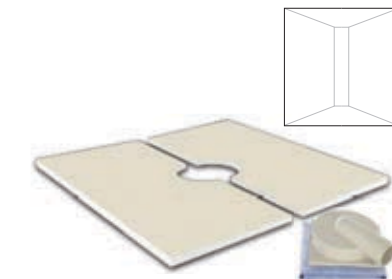


LINEAR LAT R Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000379	100114471	1000X900x30	610,00
B88000354	100111299	1200X900x30	620,00
B88000368	100114473	1200X1000x30	625,00
B88000384	100114481	1400X900x30	640,00
B88000375	100114487	1500X900x30	675,00
B88000361	100114464	1600X900x30	690,00
B88000349	100110584	1800X900x30	710,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

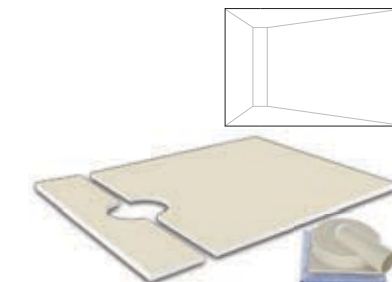


LINEAR CENT R Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000364	100114469	1000X800x30	600,00
B88000386	100114478	1200X900x30	620,00
B88000391	100114472	1200X1000x30	625,00
B88000377	100114480	1400X900x30	640,00
B88000389	100114486	1500X900x30	675,00
B88000372	100114489	1600X900x30	690,00
B88000382	100114492	1800X900x30	710,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

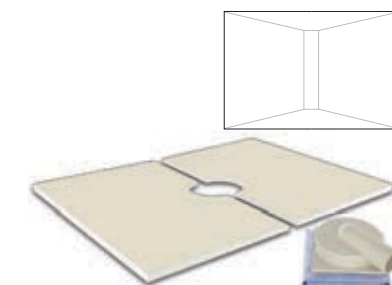

All the **concept xps** shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.



Bespoke shower trays


If you need a shower tray with certain dimensions or shape that cannot be found in our standard shower trays range, **butech** can make the shower tray with the shape and dimensions you need.

Just send us a drawing with the dimensions and shape you want for your shower tray and we will give you a price and a delivery date. If you agree, we will make your custom shower tray.

For making a square or rectangular shower tray, we need the following information:

- Shower tray dimensions:
 - Long side xP
 - Wide side yP
 - Thickness: choose among 30/40 mm
- Grating type
 - Square grating
 - Linear grating choose among 59.6/80/120 mm
- Drain position
 - Long side xS
 - Wide side yS

All dimensions must be entered in millimeters.

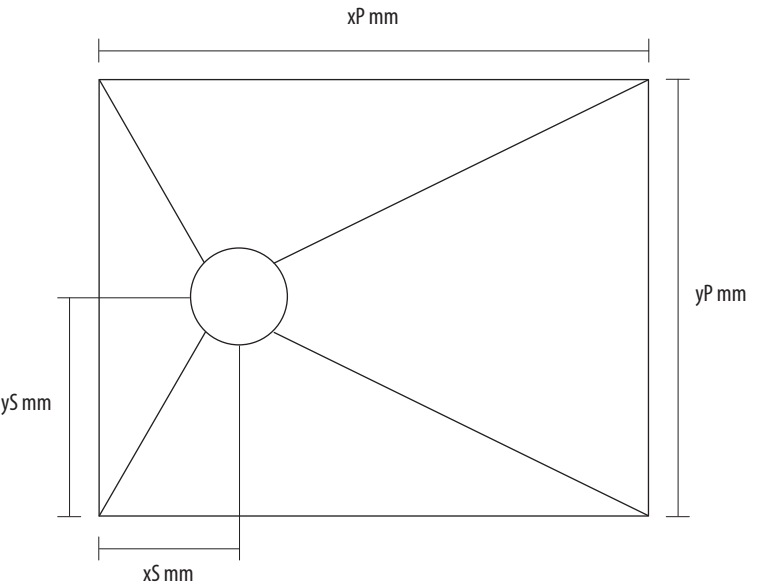

All custom drains include the **imperband kit** corresponding to the thickness of the chosen board.

Decorative grating is not included. Refer to page 126-127.

All the custom **concept xps** shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.

In case you need a shower tray with a non orthogonal shape, check with **butech** sales department.

Bespoke standard shower trays

These shower trays feature a 40 mm thickness.
It includes the **imperband standard kit**.
Does not include **square gratings**.



concept xps shower trays

ESQ Q Corner grating

KEA	SAP	Square tray	P/EU
B88000224	100103244	1-1000x40	335,00
B88000235	100103240	1001-1200x40	400,50
B88000219	100103254	1201-1400x40	466,00
B88000243	100103260	1401-1600x40	532,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit


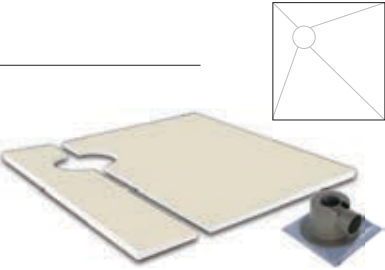


CENT Q Central grating

KEA	SAP	Square tray	P/EU
B88000205	100103242	1-1000X40	335,00
B88000203	100103238	1001-1200x40	401,00
B88000209	100103252	1201-1400x40	466,00
B88000229	100103258	1401-1600x40	532,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit


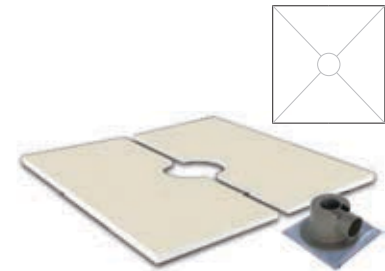


LAT R Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000211	100103245	1-1000X40	337,00
B88000222	100103241	1001-1200x40	338,50
B88000208	100103255	1201-1400x40	469,00
B88000231	100103261	1401-1600x40	535,00
B88000215	100103268	1601-1800X40	601,50
B88000228	100103272	1801-2000X40	668,00
B88000238	100103274	2001-2200X40	735,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

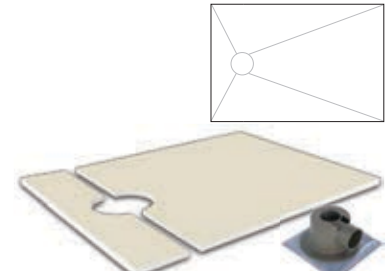



The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

CENT R Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000223	100103243	1-1000X40	337,00
B88000202	100103239	1001-1200x40	339,00
B88000241	100103253	1201-1400x40	467,00
B88000226	100103259	1401-1600x40	535,00
B88000221	100103269	1601-1800X40	602,00
B88000233	100103271	1801-2000X40	668,00
B88000242	100103273	2001-2200X40	735,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

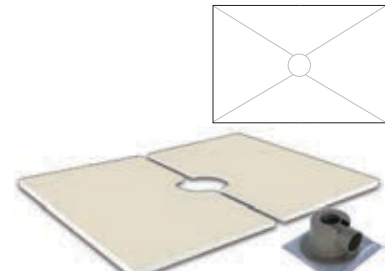

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

Square gratings

Square gratings

KEA	SAP	Square grating	P/EU
B82902021	100089372	squared	15,51
B82902056	100114593	sun	42,70

Packaging

Presentation
1 grating/box
1 grating/box



squared



sun

Bespoke standard shower trays for linear grating

These shower trays feature a 40 mm thickness.
It includes the **imperband standard kit**.
Does not include **linear gratings**.



concept xps shower trays

LINEAR LAT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000438	100116102	1-1000X40	620,00
B88000429	100116110	1001-1200x40	640,00
B88000416	100116118	1201-1400x40	660,00
B88000400	100116126	1401-1600x40	675,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit


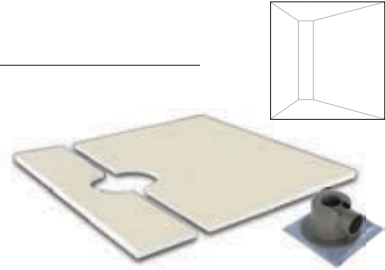


LINEAR CENT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000437	100116100	1-1000X40	620,00
B88000410	100116108	1001-1200x40	640,00
B88000419	100116116	1201-1400x40	660,00
B88000405	100116124	1401-1600x40	675,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit


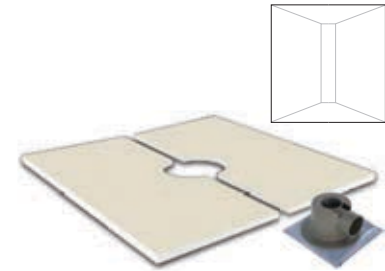


LINEAR LAT R Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000440	100116103	1-1000X40	620,00
B88000433	100116111	1001-1200x40	640,00
B88000434	100116119	1201-1400x40	660,00
B88000344	100110295	1401-1600x40	675,00
B88000343	100110164	1601-1800X40	680,00
B88000412	100116136	1801-2000X40	750,00
B88000415	100116140	2001-2200X50	800,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

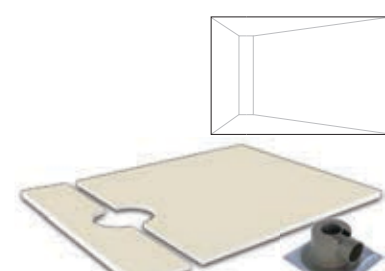



The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

LINEAR CENT R Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000441	100116101	1-1000X40	620,00
B88000399	100116109	1001-1200x40	640,00
B88000408	100116117	1201-1400x40	660,00
B88000403	100116125	1401-1600x40	675,00
B88000421	100116131	1601-1800X40	680,00
B88000424	100116135	1801-2000X40	750,00
B88000401	100116139	2001-2200X50	800,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

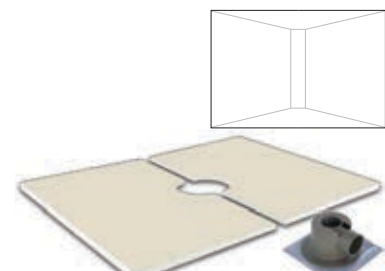

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

Linear gratings

Information referring to linear gratings is on page 126-127.



chrome texture

texture



squared

line

Bespoke refurbishing shower trays

These shower trays feature a 30 mm thickness.
It includes the **imperband refurbishing kit**.
Does not include **squaregratings**.

concept xps shower trays

ESQ Q Corner grating

KEA	SAP	Square tray	P/EU
B88000250	100103290	1-1000X30	354,00
B88000254	100103286	1001-1200X30	419,00
B88000263	100103303	1201-1400X30	485,00
B88000266	100103309	1401-1600X30	550,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

CENT Q Central grating

KEA	SAP	Square tray	P/EU
B88000251	100103288	1-1000X30	354,00
B88000244	100103284	1001-1200X30	419,00
B88000267	100103301	1201-1400X30	484,50
B88000275	100103307	1401-1600X30	550,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

LAT R Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000246	100103291	1-1000X30	355,50
B88000258	100103287	1001-1200X30	357,00
B88000268	100103304	1201-1400X30	487,00
B88000278	100103310	1401-1600X30	554,00
B88000265	100103317	1601-1800X30	620,00
B88000273	100103321	1801-2000X30	687,00
B88000270	100103323	2001-2200X30	754,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

CENT R Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000255	100103289	1-1000X30	356,00
B88000245	100103285	1001-1200X30	357,00
B88000274	100103302	1201-1400X30	485,00
B88000281	100103308	1401-1600X30	555,00
B88000276	100103318	1601-1800X30	620,00
B88000280	100103320	1801-2000X30	688,00
B88000284	100103322	2001-2200X30	755,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

All the **concept xps** shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.

Bespoke refurbishing shower trays for linear grating

These shower trays feature a 30 mm thickness.
It includes the **imperband refurbishing kit**.
Does not include **linear gratings**.

concept xps shower trays

LINEAR LAT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000413	100116098	1-1000X30	620,00
B88000404	100116106	1001-1200X30	640,00
B88000406	100116114	1201-1400X30	660,00
B88000432	100116122	1401-1600X30	675,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

LINEAR CENT Q Linear grating

KEA	SAP	Square tray	P/EU
B88000443	100116096	1-1000X30	620,00
B88000402	100116104	1001-1200X30	640,00
B88000420	100116112	1201-1400X30	660,00
B88000431	100116120	1401-1600X30	675,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

LINEAR LAT R Lateral grating

KEA	SAP	Rectangular shower tray	P/EU
B88000418	100116099	1-1000X30	620,00
B88000427	100116107	1001-1200X30	640,00
B88000409	100116115	1201-1400X30	660,00
B88000436	100116123	1401-1600X30	675,00
B88000435	100116130	1601-1800X30	680,00
B88000417	100116134	1801-2000X30	750,00
B88000425	100116138	2001-2200X30	800,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

LINEAR CENT R Central grating

KEA	SAP	Rectangular shower tray	P/EU
B88000442	100116097	1-1000X30	620,00
B88000407	100116105	1001-1200X30	640,00
B88000422	100116113	1201-1400X30	660,00
B88000423	100116121	1401-1600X30	675,00
B88000430	100116129	1601-1800X30	680,00
B88000411	100116133	1801-2000X30	750,00
B88000428	100116137	2001-2200X30	800,00

Packaging

Presentation
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit
Shower tray + imperband kit

The maximum length of the wide side of this type of tray is 1000 mm. For higher lengths, check with **butech** sales department.

All the **concept xps** shower trays have available a 50 mm thickness special piece to increase the height of the shower tray and cover sewer and drain. Check conditions with your sales representative from PORCELANOSA GRUPO.




Altea cabin

Shower cabin with circular tray with 100 cm radius and 200 cm height. Specially recommended for health resorts and outdoors.

This circular shower includes the following elements:

- Circular shower tray.
- Panels for circular walls.
- Drain system.
- Standard mounting elements.

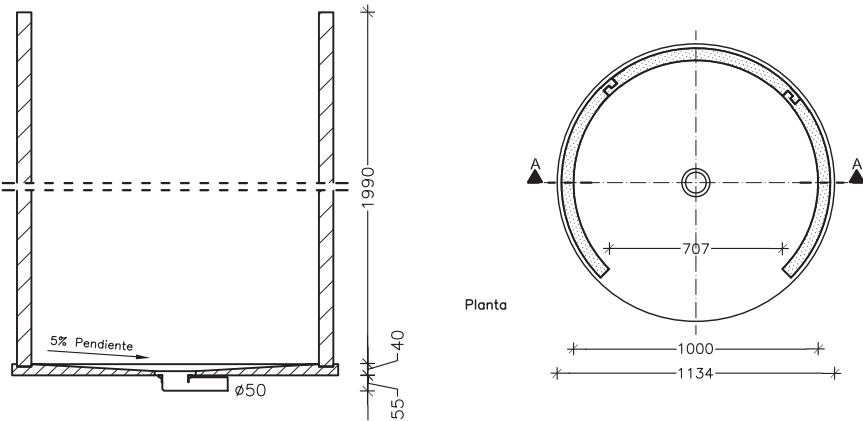

Altea concept shower

KEA	SAP		P/EU
B88000447	100116226	2.000 x 1000 x 1000	1,787.00


Decorative grating not included

Victoria cabin

Shower cabin with circular tray with 100 cm radius and 200 cm height. Specially recommended for bathroom refurbishings.

This circular shower includes the following elements:

- Circular shower tray
- Panels for circular walls
- Drain system.
- Standard mounting elements.

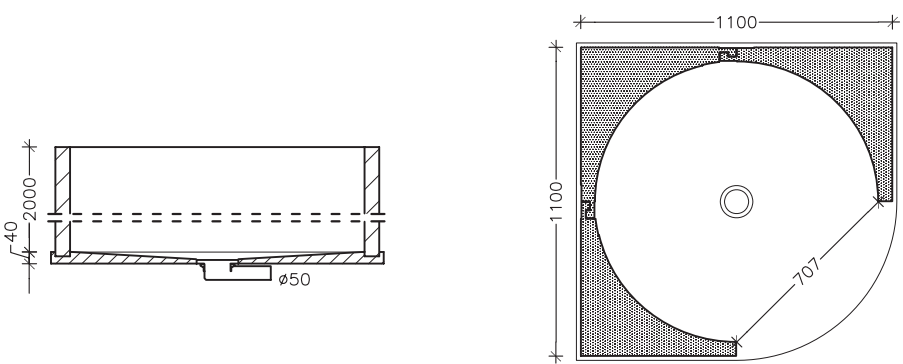

Victoria corner concept shower

KEA	SAP		P/EU
B88000445	100116227	1.100 x 1100 x 2000	1,995.00


Decorative grating not included

Niágara cabin

Snail shaped shower cabin with 59 cm entrance and 200 cm high. Specially recommended for health resorts and outdoors.

This snail-shaped shower includes the following elements:

- Shower tray.
- Panels for circular walls.
- Drain system.
- Standard mounting elements.

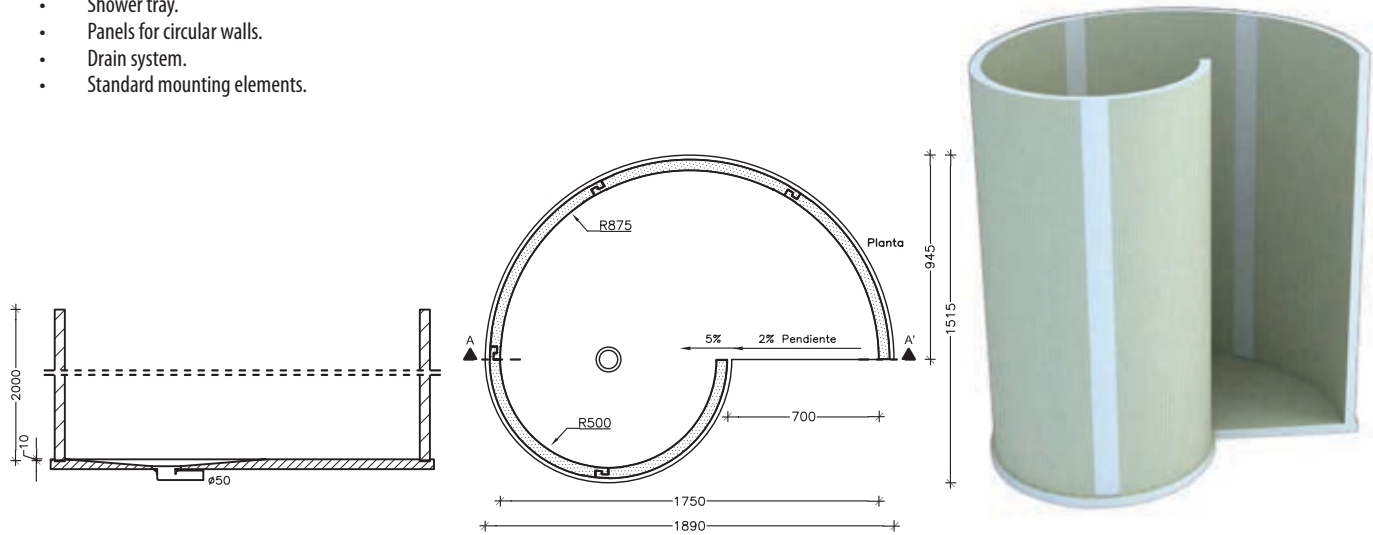


Niágara concept shower

KEA	SAP		P/EU
B88000448	100116228	1890 x1515 x 2000 right entrance	2,735.00

Decorative grating not included

concept benches

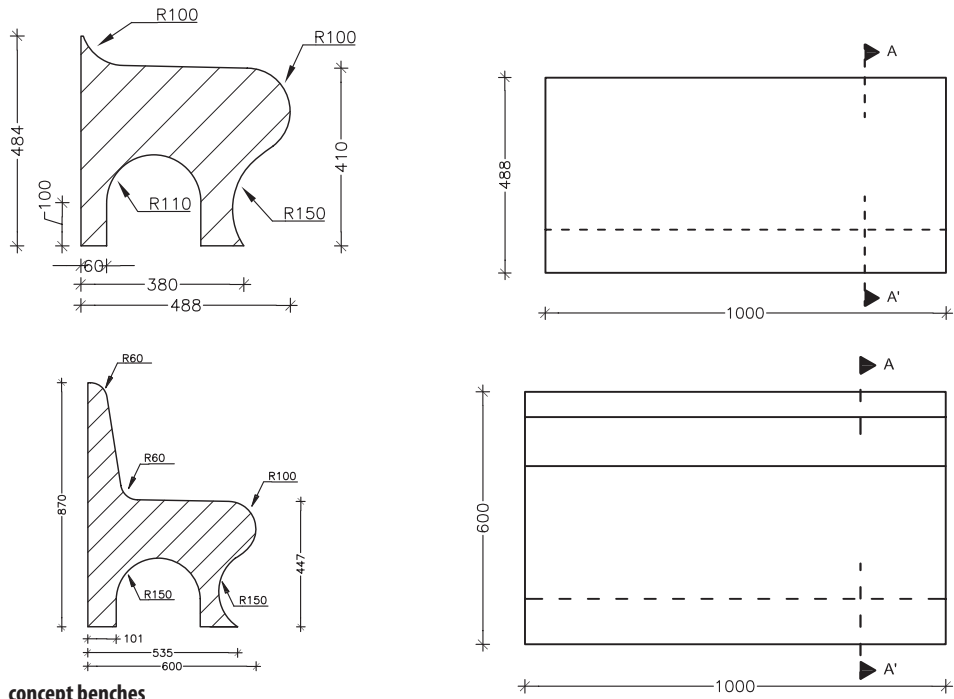

concept benches

KEA	SAP		P/EU
B88000446	100116223	1000X484X484 backless bench	313,50
B88000451	100116224	1000X600X870 backed bench	519,00


Iguazú cabin

Rectangular cabin, 180 cm long, 100 cm wide and 228.9 cm high, with 60 cm entrance. Specially recommended for health resorts.

This shower includes the following elements:


- Shower tray.
- Panels for walls.
- concept bench.
- Flat ceiling.
- Imperband kit (waterproofing + outlet).
- Standard mounting elements.

Taps, decorative grating, main door, manhole cover and plumbing not included.

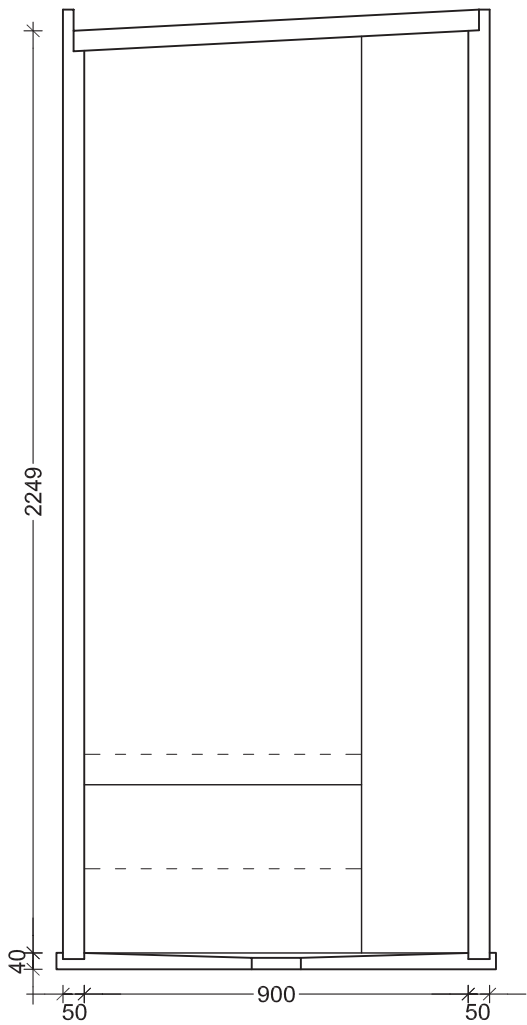

Iguazú vapor cabin

KEA	SAP		P/EU
B88000449	100116225	1800X1000X2300	5,040.00

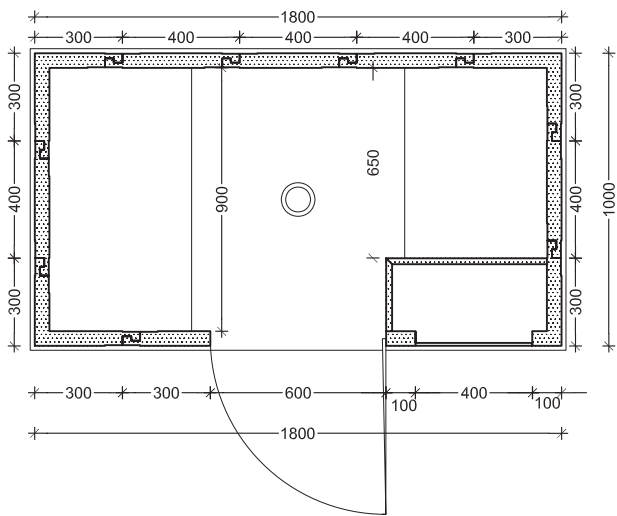

Product family

Product name

Adhesivos cementosos

flexitec n

flexitec n es un adhesivo cementoso tipo C2 TE, apto para colocación de gres porcelánico, sobre fondos de base cemento o soportes flexibles como el cartón-yeso. Especialmente recomendado por su excelentes condiciones de uso.

Adhesivo base cemento de elasticidad media para la colocación en capa fina de cerámicas absorbentes, gres y gres porcelánico. Tixotropico.

✓

Eligible

✗

Non-eligible

✱

Mixed with

d-stuk

✓

urbatek

✓

ston-ker

✗

gran formato

✓

cartón yeso

✗

piscinas

✓

exterior

Symbols for types of substrates

Product name

flexitec n

Product features

Características:

- Adhesivo cementoso monocomponente.
- Excelente adherencia. Deformabilidad media
- Mortero de textura fina, con óptimas condiciones de preparación amasado y aplicación.
- Alta adherencia inicial sin deslizamiento vertical.
- Tiempos de trabajo prolongados. Tiempo abierto mayor de 30 min.
- Espesor de aplicación de hasta 6 mm.
- Resiste la helada.
- Agua de amasado: 7,0 - 7,5 l por saco de 25 Kg

Aplicaciones recomendadas:

- Revestimientos interiores.
- Pavimentos porcelánicos interiores y exteriores.

Types of applications where the use of the product is recommended

Product Coverage

Consumo:

Baldosa 20 x 30 cm	3 kg / m²
Baldosa 30 x 30 cm	3 kg / m²
Baldosa 30 x 60 cm	4 kg / m²
Baldosa 44 x 44 cm	4 kg / m²
Baldosa 30 x 90 cm	5 kg / m²
Baldosa 44 x 66 cm	5 kg / m²

Materiales:

- Baldosas cerámicas absorbentes de formato grande.
- Baldosas cerámicas no absorbentes de formato mediano.
- Gres porcelánico (absorción de agua < 0,5% según EN-ISO 10545-3).

Types of materials where the use of the product is recommended

Product certifications and standards

Certificados / normativas:

Avis technique: CSTR 1061-222 MC 299
EN 12004 C2 TE

Soportes:

- Soleras y revocos de mortero de cemento.
- Placas de hormigón.
- Placas de cartón yeso.
- Sobre fondos de anhidrita o yeso, aplicar uniprim.

Types of substrates where the use of the product is recommended

Product name

flexitec n

REA

SAP

flexitec n blanco

flexitec n gris

P/EU

0,81 p/kg

0,77 p/kg

Embalaje

Presentación	Empaquet.
Saco 25 kg	1000 kg / pallet
Saco 25 kg	1000 kg / pallet

Type of packaging for the product

Product picture

Antes de utilizar este producto en alguna aplicación no indicada en este catálogo, realizar una prueba previa o consultar con la ficha técnica del producto.

62

Value

A

110	acid net
112	acid net 1L
112	acid net +

B

110 basic gel

112 basic gel 1L

74 bt-1000 n

75 bt-3000 n

121 bathroom drain

C

59 cerancol
101 cl-stuk
82 colorstuk 0-4
84 colorstuk 2-12
113 colorstuk cleaner
86 colorstuk especial n
88 colorstuk rapid n
114 colorstuk sealer
78 concealed façade fixing
146 concept panel xps
154 concept shower trays xps
167 concept shower xps

E

- 142 electric radiant floor heating
- 94 epotech
- 113 epotech cleaner
- 92 epotech aqua
- 90 epotech crystal
- 91 epotech gold & silver

F

62 flexitec n
63 flexitec n sp
77 fonolax
136 fonomix 15/15 n
137 fonomix 15/40 n
138 fonopac R
139 fonopac R eco
134 fonos (+)
69 fr-one especial
68 fr-one n

120 imperband
125 imperband refurbishing kit
124 imperband standard kit
118 imperbox

	L
130	lamitech n
105	level 1 n
106	level 1 pro
107	level 3
126	linear grid

N
114 non-slip tile

M
71 maxifluid

0
64 one-flex n
65 one-flex n sp

P
100 p-404
73 politech n
113 porce-clean

42 pro-corner B
42 pro-corner E
42 pro-corner mosaic
42 pro-corner R

48 pro-dilata CFC PVC
48 pro-dilata CFL PVC
48 pro-dilata CFM aluminium
48 pro-dilata CFM inox
49 pro-dilata CK

51 pro-flex

47 pro-level C aluminium
47 pro-level C chrome
47 pro-level M aluminium
47 pro-level R aluminium

34 pro-mate 2 inox V2A
34 pro-mate 2 inox V4A

35 pro-mate 3 aluminium
35 pro-mate 3 chrome

40 pro-mate 45 aluminium
40 pro-mate 45 brass
40 pro-mate 45 inox
41 pro-mate 45 PVC brillo
41 pro-mate 45 PVC II
41 pro-mate 45 PVC mate
45 pro-mate 45 top

36	pro-mate 5 aluminium
28/36	pro-mate 5 brass
36	pro-mate 5 chrome
21	pro-mate 5 chrome SW 168
21	pro-mate 5 chrome SW 500
24	pro-mate 5 gold
19	pro-mate 5 gold SW 168
19	pro-mate 5 gold SW 500
26	pro-mate 5 graphite
26	pro-mate 5 oxyde
23	pro-mate 5 SW Glass

38	pro-part aluminium
28/38	pro-part brass
38	pro-part chrome
24	pro-part gold
26	pro-part graphite
38	pro-part inox

38	pro-part Li aluminium
28/37	pro-part Li chrome
13	pro-part Li chrome SW 1500
15	pro-part Li crystal rock SW
17	pro-part Li crystal sand SW
24	pro-part Li gold
13	pro-part Li gold SW 1500

- 26 pro-part line
- 26 pro-part moon
- 26 pro-part ocean
- 26 pro-part oxyde

53 pro-plint aluminium
53 pro-plint aluminium R
53 pro-plint inox

52 pro-sanit S1
52 pro-sanit S3
52 pro-sanit U1
52 pro-sanit U2

54 pro-skirting aluminio
54 pro-skirting cromado

50 pro-step aluminium
50 pro-step chrome
50 pro-step W

- 46 pro-T aluminium
- 46 pro-T brass
- 46 pro-T chrome
- 46 pro-T inox

31 pro-telo aluminium
30 pro-telo carbono
31 pro-telo inox
28 pro-telo mosaic
31 pro-telo recto
30 pro-telo W chrome

R
70 rapimax n


S

- 98 s-107
- 99 s-107 n
- 96 self-leveling spacers
- 126 square grid
- 49 structural joints AT
- 49 structural joints BT
- 131 super-drain
- 66 super-flex S2
- 72 super-one n
- 109 super-prim
- 128 sylastic

	T
129	terrace drain
60	tioxcem
61	tioxcem plus

	U
104	unicem
76	unilax
108	uniprim

V
79 visible facade fixings

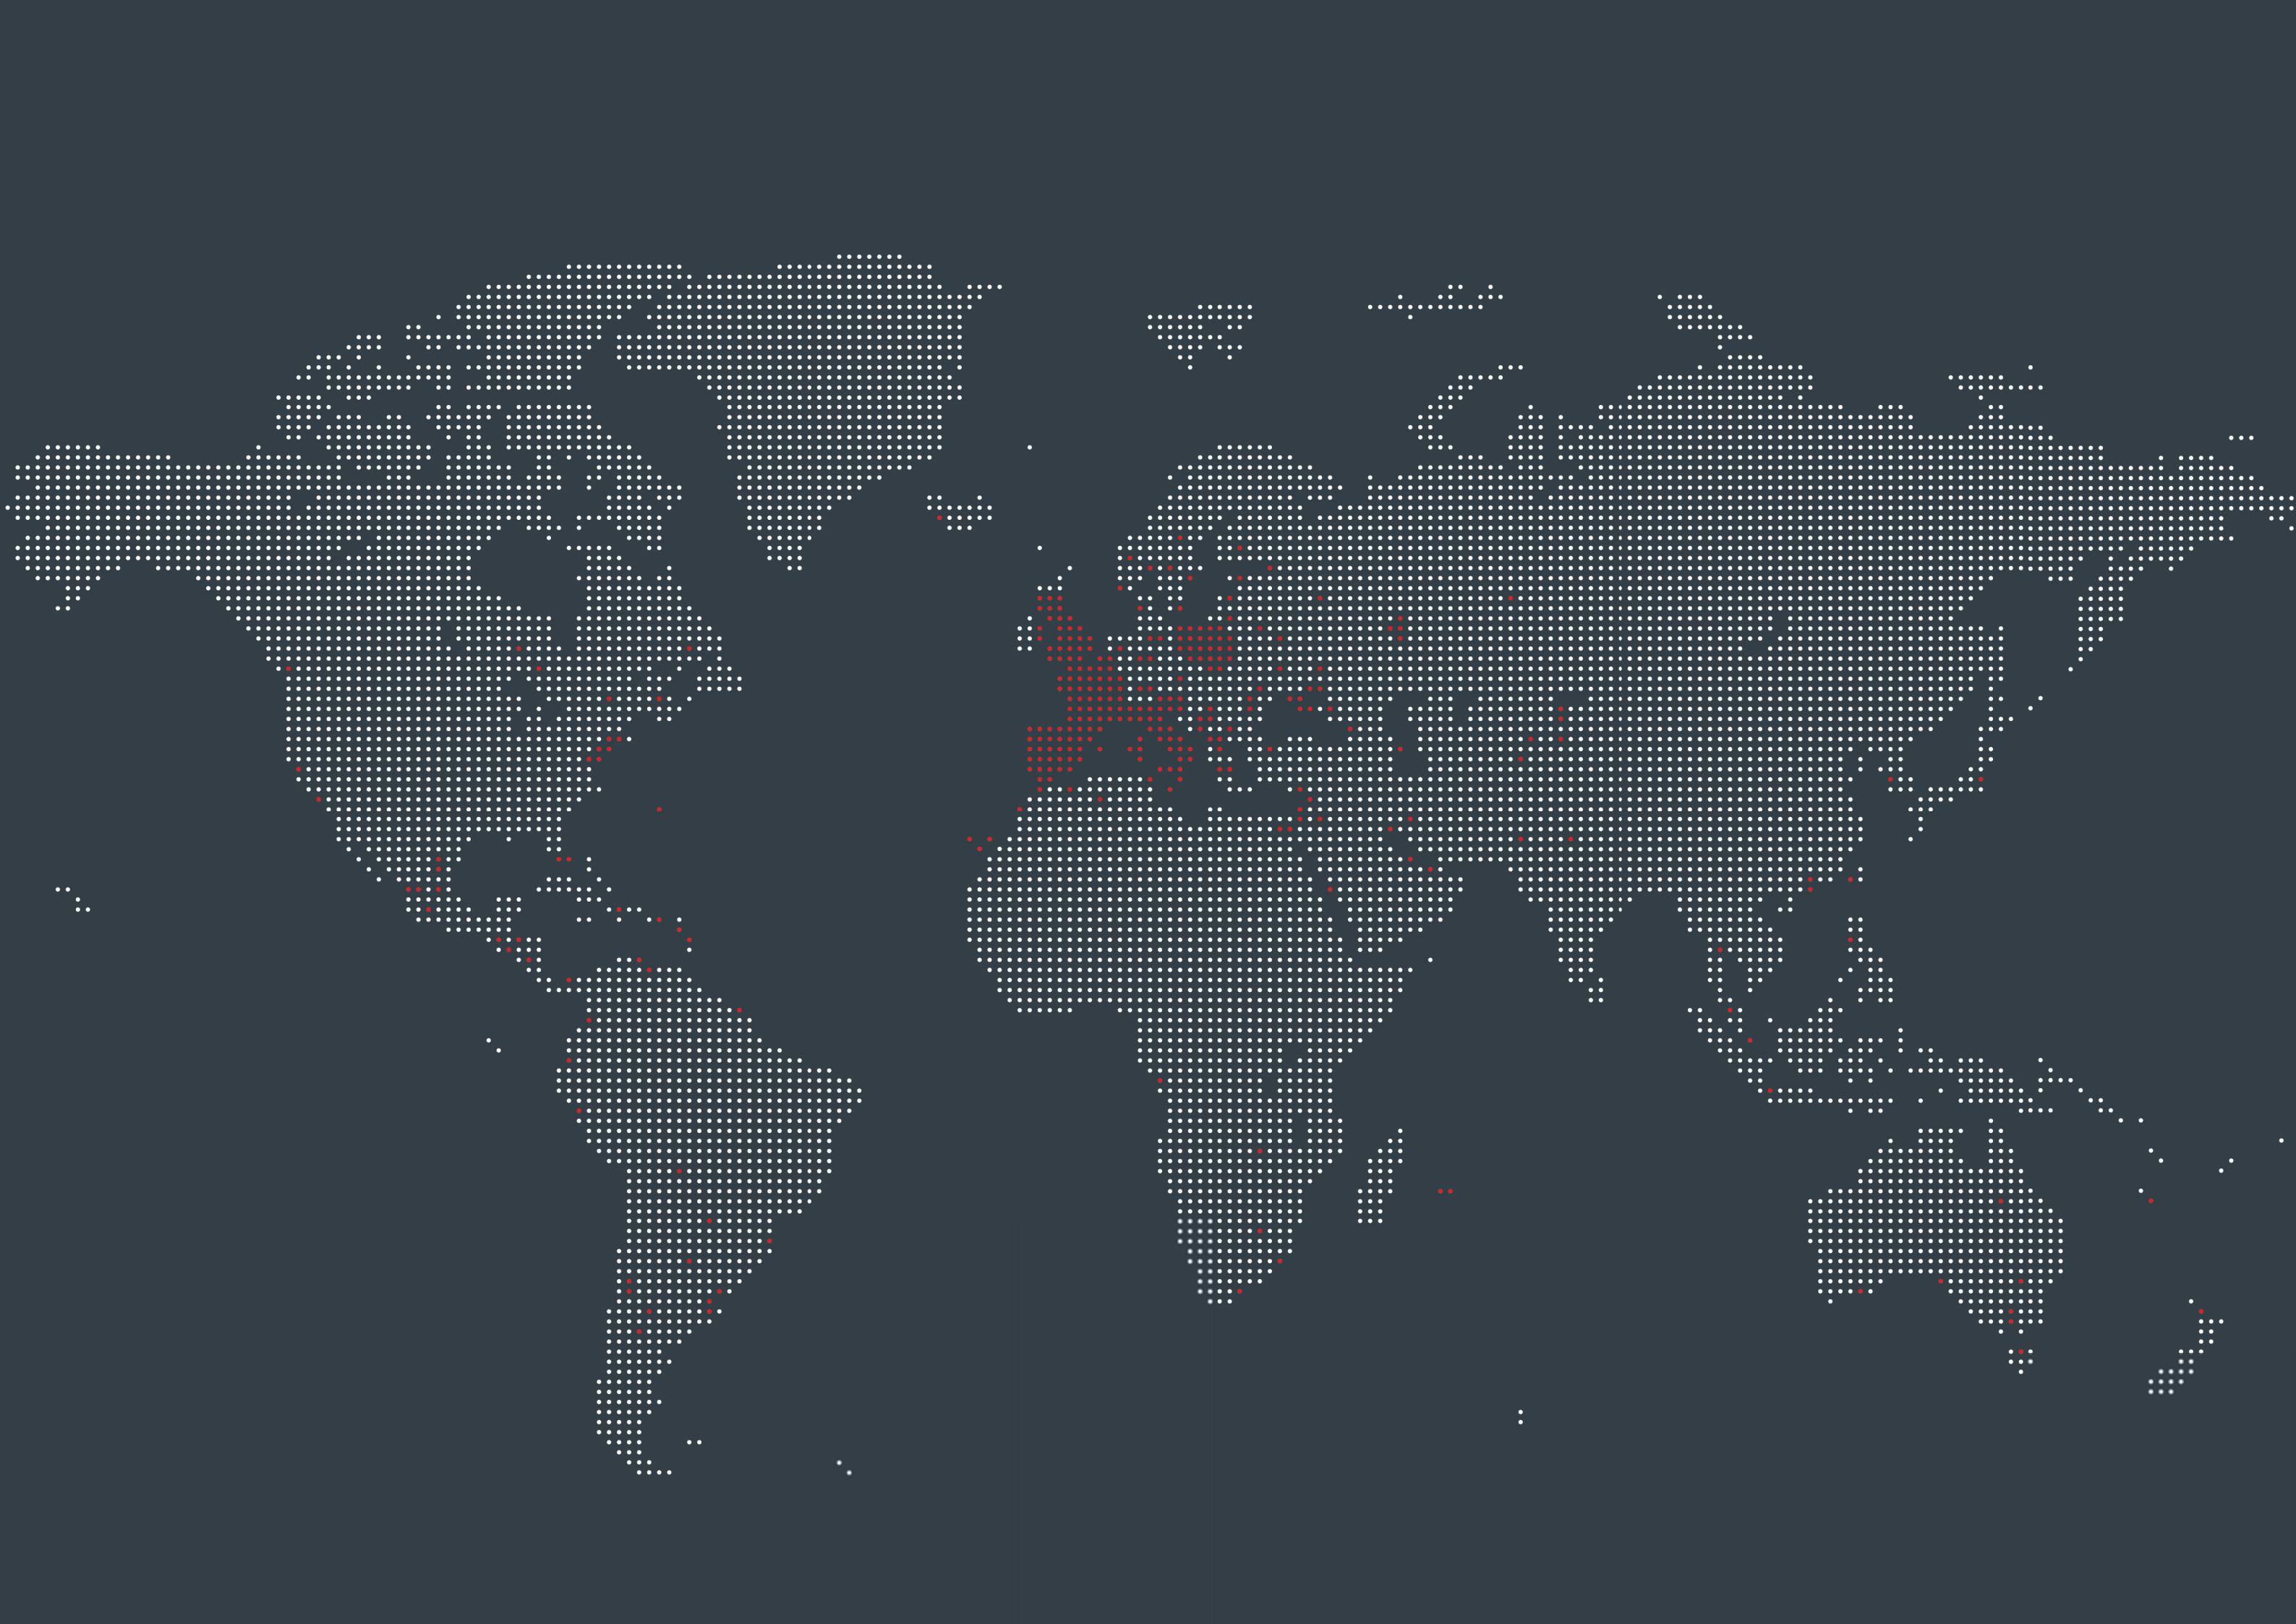

Showrooms España

Álava	JORGE FERNÁNDEZ	Vitoria-Gasteiz	Polígono de Jundiz. Paduleta, 53	+34 945 244 250	+34 945 229 321
	JORGE FERNÁNDEZ	Vitoria-Gasteiz	Los Herrán, 30	+34 945 254 755	+34 945 259 668
Albacete	OLIVARES MATERIALES DE CONSTRUCCIÓN	Villarrobledo	Avenida Reyes Católicos, 168	+34 967 138 105	+34 967 138 023
	PORCELANOSA	Albacete	Avda. Gregorio Arcos, 32 (Polígono Campollano)	+34 967 243 658	+34 967 193 465
Alicante	AZULEJOS JAVEA	Jávea	Liverpool, 4	+34 965 791 036	
	LLACER INSTALACIONES Y SERVICIOS	Denia	Pedreguer 10-12	+34 965 781 635	+34 965 789 821
	PORCELANOSA	Alicante	Polígono Las Atalayas, Parcela VI. Calle del Franco	+34 965 109 561	+34 965 106 965
	PORCELANOSA	Elche	Avenida Alicante,105	+34 966 610 676	+34 966 610 700
	PORCELANOSA	San Juan	Carretera Valencia, km 88	+34 965 656 200	+34 965 655 644
Almería	PORCELANOSA	Almería	Avenida Mediterráneo, 2º tramo	+34 950 143 567	+34 950 142 067
	PORCELANOSA	El Ejido	Carretera Nacional 340, km 411	+34 950 483 285	+34 950 486 500
	PORCELANOSA	Vícar	Parque Comercial Viapark, parcela 1	+34 950 325 575	+34 950 338 651
Asturias	PORCELANORTE S.L.	Gijón	Menéndez Pelayo 30	+34 984 396 462	
	PORCELANOSA	Oviedo	Polígono Espíritu Santo. Calle Dinamarca, s/n	+34 985 791 526	+34 985 985 963
Ávila	PAVIMARSA	Ávila	Pol. Ind. Vicolozano - Parcela 2	+34 920 259 820	+34 920 259 821
Badajoz	AZUAGA-CORVILLO VERA	Azuaga	Pol. Ind. Parcela 5	+34 924 892 579	+34 924 890 688
	GALLERY CERAMIC	Badajoz	Carretera N-V Madrid-Lisboa, km 399	+34 924 229 144	+34 924 229 143
	LLERENA-CERAMIC	Llerena	Calle Convento Santa Isabel, 2 Local Comercial	+34 924 108 318	
	PORCELANOSA	Mérida	Avenida Reina Sofia, 8	+34 924 330 218	+34 924 330 315
Baleares	MACODOR	Cala d’Or - Mallorca	Carretera Calonge - Cala d’Or, km 1,5	+34 971 658 210	
	MAGATZEM SES FORQUES	Llucmajor - Mallorca	Calle Doctor Fleming, 10	+34 971 662 114	+34 971 662 816
	PORCELANOSA	Andraitx - Mallorca	Calle Habana,2	+34 971 136 476	
	PORCELANOSA	Inca - Mallorca	Pagesos, s/n. Polígono Inca	+34 971 507 650	+34 971 507 656
	PORCELANOSA	Manacor - Mallorca	Carrer Via Palma, 102	+34 971 554 502	
	PORCELANOSA	Palma de Mallorca - Mallorca	Gran Vía Asima, 21. Polígono Son Castelló	+34 971 430 667	+34 971 297 094
	PORCELANOSA	Sant Antoni de Portmany - Ibiza	Polígono Monte Cristo, s/n. Carretera Ibiza	+34 971 317 292	+34 971 317 293
	PORCELANOSA	Soller - Mallorca	Carrer del Mar, 193	+34 971 630 219	
Barcelona	AMARGANT	Pineda de Mar	Carrer Santiago Rusiñol, 96	+34 937 671 416	+34 937 627 488
	AMARGANT	Sant Pol de Mar	Passeig Parc, 1	+34 937 600 112	+34 937 600 411
	ANTONI PONT	Gironella	Carrer Farguell, 31	+34 938 228 088	+34 938 250 786
	AZULEJOS SAN ANDRÉS	Barcelona	Plaça Mossen Clapes, 2-3	+34 933 455 102	+34 933 461 015
	CASANOVA	Sabadell	Avenida Rafael Casanova 24	+34 937 481 015	+34 937 274 834
	CASANOVA	Sant Fruitós de Bagés	Carretera de Manresa a Berga km 1. Naus 2-7	+34 938 770 625	+34 938 776 530
	COMERCIAL MAESTRO CANET	Canovelles	Poligon Can Castells, nau 7-8	+34 938 466 568	+34 938 409 216
	COMERCIAL SOLSAN	Palau Solita i Plegamans	Cami Reial, 109	+34 938 648 125	+34 938 649 617
	COMERCIAL STC	Sant Sadurní D’Anoia	Rambla Generalitat, 59	+34 931 593 137	+34 931 615 015
	CONSAN	Santpedor	Pol. Ind. Les Verges	+34 938 320 669	+34 938 320 669
	CORRETJA	Vic	Carrer Mas de Bigas, 8-26	+34 938 854 261	+34 938 894 733
	E. TORRENTS	Vilanova del Valles	Carrer Masnou, 5/N	+34 938 459 034	+34 938 459 913
	FOAP	Sant Cugat del Valles	Avinguda Rius i Taulet, 27	+34 936 740 503	+34 936 755 854
	FRADERA MATERIALS	Sant Celoni	Carrer Ramon i Cajal, 1	+34 938 671 512	+34 938 675 318
	GARRO	Sant Boi de Llobregat	Carretera Sta. Creu de Calafell, km 10,7	+34 936 545 952	+34 938 400 620
	HUJO DE FERNANDO ROCA	Molins de Rei	Carrer del Pla, 9	+34 936 681 434	+34 936 801 458
	J. PÉREZ AZNAR	Sant Viçens dels Horts	Carretera de Sant Boi, 168-170	+34 936 562 452	+34 936 562 452
	JOAN DOT	Torelló	Carrer Ter, 50	+34 938 504 646	+34 938 504 286
	JODUL	Taradell	Carretera de Vic, km 5,8	+34 938 800 800	+34 938 126 054
	LOFT CUINA	Cornellà	Carrer La Miranda, 6-8	+34 934 743 793	+34 934 741 305
	MA-CO	Cubelles	Carrer Penedes-Carrer La Selva Pol.Ind Les Salines	+34 938 954 141	+34 938 954 142
	MARESME GRES	Mataró	Carrer Sant Isidor, 78	+34 931 615 015	
	MATERIALS CASSERRES	Casseres	San Rafael	+34 938 213 770	
	ORMAT	Cabrera de Mar	Carretera de Vilassar-Argentona km.1	+34 937 591 139	+34 937 502 076
	PLANELL	Calaf	Carretera Manresa km 31	+34 938 698 750	+34 938 600 181
	PLANELL	Vilanova del Camí	Carretera Vilafranca 108-111	+34 938 060 240	+34 938 060 239
	PRAT MATERIALS I MAQUI-NARIA	Manresa	Mossen Jacint Verdaguer, 26	+34 938 741 903	+34 938 741 903

	PRAT MATERIALS I MAQUI-NARIA	Navàs	Carretera de Muijal, 50	+34 938 204 033	+34 938 204 098
	ROSA JORDANA RABETLLAT	Mataró	Carrer de Montserrat, 7	+34 937 903 089	+34 937 903 089
	SUMCO	St. Pere de Ribes	Carretera de Barcelona, C-246 km. 42,4	+34 938 933 066	+34 938 936 004
	PORCELANOSA	L’Hospitalet de Llobregat	Ciències, 65. Gran Vía l’Hospitalet	+34 932 642 500	+34 932 007 036
Burgos	BIGMAT FONTECHA	Burgos	Alcalde Martín Cobos,15. Nave 5 y 6	+34 947 485 153	+34 947 483 941
	GRUPO DISMAR DUERO	Aranda de Duero	Avenida Portugal, Parcela 17	+34 947 513 281	+34 947 513 349
	JORGE FERNÁNDEZ	Miranda de Ebro	Camino Fuente Basilio, s/n	+34 947 323 351	+34 947 314 589
Cáceres	BIGMAT CAYUELA	Moraleja	Avenida Extremadura, 26	+34 927 515 198	+34 927 147 266
	PORCELANOSA	Cáceres	Avenida Juan Pablo II, 130	+34 927 236 337	+34 927 236 205
Cádiz	ALMECOR	Olvera	Avda. Julian Besteiro, 29	+34 956 120 776	+34 956 120 776
	AZULGRIF	Villamartín	Calle Rosario, 9	+34 956 730 687	+34 956 730 911
	DOCURRI	Ubrique	Paseo del Prado 38-40	+34 956 462 263	+34 956 462 623
	PORCELANOSA	Algeciras	Carretera de Málaga, km 109	+34 956 635 282	+34 956 635 285
	PORCELANOSA	El Puerto de Santa María	Polígono El Palmar. Carretera Madrid-Cádiz, km 653,2	+34 956 540 084	+34 956 872 464
	PORCELANOSA	Jerez de la Frontera	Parque Empresarial, Av. De la Ilustración , 1	+34 956 187 160	+34 956 302 904
	PORCELANOSA	San Fernando	Polígono Tres Caminos, s/n	+34 956 592 360	+34 956 884 677
	PORCELANOSA	Santander	Avenida Parayas, s/n	+34 942 352 510	+34 942 352 638
	PORCELANOSA	Torrelavega	Boulevard Demetrio Herrero, 1	+34 942 835 026	+34 942 881 787
Castellón	PORCELANOSA	Castellón de la Plana	Asensi, 9	+34 964 239 162	+34 964 238 930
	PORCELANOSA	Villarreal	Carretera Vila-real-Puebla de Arenoso (CV-20) km 0,7	+34 964 506 800	+34 964 525 418
	PORCELANOSA	Vinaroz	Carretera N-340, km 1.050,1	+34 964 400 944	+34 964 400 650
Ceuta	BAEZA	Ceuta	Ampliación Muelle de Poniente, 96	+34 956 511 312	+34 956 511 309
Ciudad Real	PORCELANOSA	Alcazar de San Juan	Corredera, 56	+34 926 546 727	+34 926 546 727
	PORCELANOSA	Ciudad Real	Carretera de Carrión, 11	+34 926 251 730	+34 926 255 741
Córdoba	PORCELANOSA	Córdoba	Carretera N-IV, km 404. Polígono de Torrecilla	+34 957 760 024	+34 957 760 123
Cuenca	ALMACENES PAÑOS	Villanueva de la Jara	Camino de Rubielos, 8	+34 967 498 000	+34 967 498 000
	MATERIALES DE CONSTRUCCIÓN MARTÍNEZ ORTEGA	Casas de Haro	Calle Dos de Mayo, 28	+34 969 380 708	+34 969 380 708
	VICENTE DE LOS RIOS	Tarancón	Avda. del Progreso, 19	+34 969 321 323	+34 969 321 334
	VICOSAZ	Cuenca	Hermanos Becerril, 6 bajo	+34 969 233 200	+34 969 234 475
Gerona	ARC ARBUCIES CERAMIKUES	Arbucies	Pol. Ind. Cal Xic-Parc, 4	+34 972 162 364	+34 972 860 954
	BRECOR SL	Blanes	Carretera Tordera,79. Blanes	+34 972 336 062	+34 972 358 482
	CARMONA	Lloret de Mar	Carretera de Lloret_Vidreres 2,1	+34 972 372 710	+34 972 349 763
	FERRER CERVIÀ	Sarria de Ter	Avinguda de França, 192	+34 972 173 442	+34 972 173 456
	FRIAS MATERIALS	Vila-sacra	Carrer Castello, 72	+34 972 670 073	+34 972 673 071
	FULCARA BRUGUE XAVIER	Salt	Carrer Rafael Maso, 56	+34 972 234 591	+34 972 402 284
	GINESTA	Sant Feliu de Guixols	Carrer Santa Magdalena, 11	+34 972 320 529	+34 972 321 616
	GIROP	Girona	Carrer Llorà, 5	+34 972 393 200	+34 972 393 071
	MATERIALES CREIXELL	Esclanyà Begur	Carrer Palafrugel Regencos. Polígono industrial Riera Esclanya, 1	+34 972 300 628	+34 972 610 772
	MERCAMAT	Mont-ras	Carretera C-31 km. 329,8	+34 972 612 027	+34 972 302 146
	OLIVERAS	Cornellà del Terri	Carretera de Girona a Banyoles km 12,8	+34 972 594 131	+34 972 594 552
	OLIVERAS	Figuères	Carretera N-II km 759	+34 972 672 259	+34 972 672 255
	OLIVERAS	Les Prespes	Pol. Ind. Les Prespes. Parcel·la 20	+34 972 694 704	+34 972 693 003
	OLIVERAS	Palol d’Onyar-Quart	Carretera Comarcal C-250 km 4,3	+34 972 468 119	+34 972 468 123
	SERVIMAT INICIATIVES	Canet de la Tallada	Carretera C-31 km. 354	+34 972 780 524	+34 972 780 827
	TG NOVA ARQUITECTURA	Palamos	Avinguda Catalunya,91	+34 972 312 250	+34 972 312 249
Granada	TECMACER	Armillà	Avenida San Rafael (Junto Sprinter)	+34 958 253 081	+34 958 183 367
Guipúzcoa	JORGE FERNÁNDEZ	San Sebastián	Pol. Ind. Belartzta. Fernando Múgica, 15	+34 943 376 966	+34 943 376 841
Huelva	PORCELANOSA	Huelva	Carretera Tráfico Pesado, s/n. Polígono La Paz	+34 959 543 600	+34 959 237 951
Huesca	AINSA - COMERCIAL CAMPO-DARVE	Ainsa	Pol. Ind. Sobrarbe, Naves 11 y 12	+34 974 500 267	+34 974 500 865
	BERGES CENTRO COMERCIAL	Fraga	Avenida Aragón, 70	+34 974 471 439	+34 974 471 439
	PORCELANOSA	Huesca	Polígono Sepes. Calle Ronda la Industria 1-3 nave C	+34 974 242 738	+34 974 242 676
Jaén	PORCELANOSA	Jaén	Polígono Olivares. Carretera Bailén-Motril, km 323	+34 953 280 757	+34 953 284 035
La Coruña	NEIRA Y ORTEGAL, S.L.	Ferrol	Carretera Catabois, 258	+34 981 326 532	+34 981 324 951
	NEIRA Y ORTEGAL, S.L.	Ortigueira	Carretera C-642 s/n, Cuiña	+34 981 400 880	+34 981 400 883
	SUMINISTROS VIA-MAR, S.L.	A Coruña	Médico Rodríguez, 18-20	+34 981 279 431	+34 981 279 431
	SUMINISTROS VIA-MAR, S.L.	Betanzos	Avenida Fraga Iribarne, s/n	+34 981 772 190	+34 981 774 257
	PORCELANOSA	Santiago de Compostela	Polígono Comercial Costa Vella	+34 981 897 595	+34 981 530 901
	PORCELANOSA	Santiago de Compostela	Rua Clara Campoamor, 13-15 (Montouto) - Teo	+34 981 509 270	+34 981 819 334
	PORCELANOSA	Santiago de Compostela	General Pardiñas, 13-Bajo	+34 981 569 230	+34 981 569 230

La Rioja	RIOJACER	Logroño	Avenida de Burgos, 43-45	+34 941 286 021	+34 941 202 271
Las Palmas	PORCELANAS Y PAVIMENTOS CANARIOS	Las Palmas de Gran Canaria	Avenida Mesa y López, 63	+34 928 472 949	+34 928 472 944
León	PORCELANOSA	San Andrés del Rabanedo	Carretera León-Astorga, km 3,5	+34 987 801 570	+34 987 801 475
Lérida	FRANCISCO BELETA ARMEN-GOL	Cervera	Avinguda Catalunya, 110-112	+34 973 530 631	+34 973 530 631
	J. FARRÉ	Balaguer	Carrer Urgell, 39	+34 973 445 765	+34 973 445 072
	LLEIDA-PMP	Lleida	Poligono Industrial Neoparc - Carrer D'ïvars D'urgell, 20	+34 973603954	+34 973603950
	MATERIALS GERMANS MAURI	Lleida	Carrer Princep de Viana, 36	+34 973 232 139	+34 973 247 943
	MATERIALS JORDI VILAR	Solsona	Carretera Manresa, s/n km.50	+34 973 482 077	+34 973 482 373
	MATERIALS PIRINEU	La Seu d'Urgell	Carretera de Lleida, 28	+34 973 351 850	+34 973 353 410
	MOLLERUSA-PMP	Mollerusa	Avda.canal, 8 Baixos	+34 687542944	
	PREFABRICATS LLEIDA	Artesa de Segre	Carretera Agramunt, km. 0,5	+34 973 400 179	+34 973 400 123
	PRETENSADOS RIBERA	El Pont de Suert	Carretera N-230 km 124,5	+34 973 690 063	+34 973 690 400
	PRETENSADOS RIBERA	Vielha	Carretera França, 40 (Mig Aran)	+34 973 641 460	+34 973 642 271
	PRETENSATS CUÑAT	Agramunt	Carrer Capella, 6	+34 973 390 115	+34 973 392 810
	PRETENSATS SOLE	La Pobla de Segur	Avinguda Estació,38	+34 973 680 339	+34 973 680 291
	PRETENSATS SOLE	Tremp	Carrer Sant Jordi, 2	+34 973 651 588	
	PUJOL ELEMENTS	Lleida	Carrer Tarragona, 40	+34 973 202 350	+34 973 203 113
	TARREGA NOUMAG	Tarrega	Calle Júpiter,7 (Pol. Ind. La Canaleta)	+34 607 497 330	
Lugo	ALMACENES BAHIA, S.L.	Foz	Maestro Lugalde, 6	+34 982 140 957	+34 982 132 065
	ARIAS NADELA, S.L.	Lugo	Tolda de Castilla, s/n	+34 982 245 725	
	ESTABLECIMIENTOS REY, S.L.	Xove	Avda. Diputación, 88	+34 982 592 006	+34 982 592 071
Madrid	PORCELANOSA	Alcobendas	Parque Río Norte	+34 916 623 232	+34 916 624 607
	PORCELANOSA	Alcorcón	Carretera N-V, km 15,5. Parque Oeste de Alcorcón	+34 916 890 172	+34 916 890 170
	PORCELANOSA	Leganés	Avenida Recomba, 13. Poligono la Laguna Salida 53 - M50	+34 914 819 200	+34 916 930 292
	PORCELANOSA	Madrid	Ortega y Gasset, 62. Esquina Conde Peñalver	+34 914 448 460	+34 914 025 111
	PORCELANOSA	Madrid	Alcalá, 514	+34 917 545 161	+34 917 545 555
Málaga	PORCELANOSA	Antequera	Río de la Villa, 3 Polígono industrial	+34 952 701 819	+34 952 843 751
	PORCELANOSA	Málaga	Avenida Velázquez, 77	+34 952 241 375	+34 952 240 092
	PORCELANOSA	Marbella	Ricardo Soriano, 65	+34 952 826 868	+34 952 822 880
Murcia	PORCELANOSA	Caravaca de la Cruz	Avenida Carretera Granada, 20	+34 968 705 647	+34 968 705 648
	PORCELANOSA	Cartagena	Calle Belgrado, Parcela 81, Polígono industrial Cabezo Beaza	+34 968 529 302	+34 968 528 362
	PORCELANOSA	Lorca	Carretera de Granada, 127. Poligono Los Peñones	+34 968 478 130	+34 968 470 820
	PORCELANOSA	Murcia	Avenida Juan de Borbón, s/n. Parque Comercial Thader	+34 968 879 527	+34 968 831 725
	PORCELANOSA	Yecla	Avenida de la Paz, 195	+34 968 718 048	+34 968 718 048
Navarra	CERÁMICAS CECILIO CHIVITE	Cintruéni go	Pol. Ind. s/n. Variante N-113	+34 948 811 973	+34 948 815 249
	MONTEJO CERÁMICAS	Multiva Baja	Polígono Carretera Tajonar, Calle-A, Naves 2- 4	+34 948 239 065	+34 948 230 503
	MONTEJO CERÁMICAS	Pamplona	Navas de Tolosa, s/n	+34 948 224 000	+34 948 226 424
	MONTEJO CERÁMICAS	Tudela	Carretera Tudela -Tarazona, Polígono Centro de Servicios de Tudela	+34 948 848 365	+34 948 848 573
Orense	BLANCO QUINTAS	Ourense	Nosa señora da Sainza, 48	+34 988 391 114	+34 988 250 413
	JOSE R. PITEIRA, S.L.	Carballiño	Avenida Julio Rodríguez Soto, 63	+34 988 271 071	+34 988 274 780
Palencia	CANTALAPIEDRA	Palencia	Calle La Puebla, nº 2	+34 979 706 421	+34 979 702 652
Pontevedra	ALMACENES CANDA, S.L.	Lalín	Calle Monserrat, 36-39	+34 986 780 184	+34 986 782 301
	ARCOLAR 2000, S.L.	Silleda	Rua de Venezuela, 40	+34 986 580 114	+34 986 592 513
	BLANCO QUINTAS	Mos	Monte Faquiña s/n	+34 986 288 041	+34 986 486 316
	PREFABRICADOS DENA, S.L.	Dena - Meaño	Rua de Galicia, 24	+34 986 743 121	+34 986 745 131
	PREFABRICADOS DENA, S.L.	O Grove	Calle Alexandre Boveda, 82	+34 986 702 041	+34 986 733 415
	SANEAMIENTOS ROSALES, S.L.	Seixo, Marín	Avenida Doctor Otero Ulloa, 1	+34 986 702 041	+34 986 702 080
	SANEAMIENTOS ROSALES, S.L.	Vigo	García Barbón, 139 - B	+34 986 228 806	
Salamanca	PORCELANOSA	Villares de la Reina	Polígono Villares. Carretera Salamanca - Valladolid, km 2,2	+34 923 243 811	+34 923 123 414
Segovia	SEGOCER	El Espinar	Carretera Madrid - La Coruña, km 64	+34 921 172 426	+34 921 171 828
	SEGOCER	Segovia	José Zorrilla, 134	+34 921 444 122	
Sevilla	HERNÁNDEZ CARBALLO	Lora del Río	Betis s/n	+34 955 800 473	+34 955 801 439
	PORCELANOSA	Sevilla	Calle Tipografía, s/n. Polígono Industrial La Negrilla. (Autovía A-92 dirección Granada)	+34 954 260 540	+34 954 528 681
	PORCELANOSA	Tomares	San Roque, s/n. Polígono El Manchón	+34 954 152 792	+34 954 153 188
Soria	MC ODORICIO	Soria	Polígono las Casas-Il. Calles A y J, Parcela 201	+34 975 233 228	+34 975 232 188
Sta. Cruz Tenerife	AFELSA	Los Llanos de Aridane	Las Rosas, s/n	+34 922 461 112	+34 922 461 166
	AFELSA	Santa Cruz de la Palma	Abenguareme, 3	+34 922 412 143	+34 922 420 012
	PORCELANAS Y PAVIMENTOS CANARIOS	Santa Cruz de Tenerife	Avenida 3 de Mayo, 18	+34 922 209 595	+34 922 209 596

Tarragona	COMERCIAL LLAURADO	Mora La Nova	Carretera de Tivissa, s/n	+34 977 400 387	+34 977 400 052
	COMERCIAL STC	El Vendrell	Carrer Terrissaires, 1	+34 977 661 951	
	COMERCIAL STC	Reus	Plaça De les Oques, 8	+34 977 312 502	+34 977 317 211
	CONSTRUCCIONS CIURO	Roda de Bara	Acceso a Roda de Bara km 1	+34 977 802 951	+34 977 802 012
	EXCAVACIONS SANS	Montblanc	Avinguda General Prim, 6	+34 977 862 998	+34 977 861 435
	EXPOMAT ALCOVER	Alcover	Calle Tramuntana, s/n (Polígono Roques Roges)	+34 977 760 476	
	MATERIALS GISBERT	Tarragona	Carrer Francesc Macia, 4	+34 977 242 363	
	MATERIALS GISBERT	Tortosa	Carretera Gandesa km 3,5	+34 977 500 306	+34 977 501 550
	MONSERRATE ESTIL CERAMIC	Cambrils	Poligon industrial Belianes nau 5. Carretera Cambrils-Montbrió	+34 977 364 900	+34 977 364 953
	RAMON MAGRIÑA BATALLA	Valls	Carrer Montblac, 14	+34 977 600 210	+34 977 603 302
Teruel	VIUDA DE ANTONIO FONT	El Vendrell	Carrer de Valls 12	+34 977 660 794	+34 977 662 217
	GARGÓN	Teruel	Polígono La Paz, Parcela 143-149	+34 978 609 661	+34 978 607 980
Toledo	BIGMAT ALOTRANS SL	Illescas	Avda de las Naciones, 17	+34 925 532 011	+34 925 513 055
	PORCELANOSA	Toledo	Pol. Ind. Santa María de Benquerencia, Calle del Río Marchés,123	+34 925 232 402	+34 925 232 406
Valencia	PORCELANOSA	Albuixech	Avenida del Mediterráneo, Parcela 6. Polígono industrial del Mediterráneo	+34 961 417 227	+34 961 402 389
	PORCELANOSA	Sedaví	Avenida Mediterráneo, s/n. Zona Comercial de Sedaví	+34 963 185 021	+34 963 180 094
	PORCELANOSA	Valencia	Colón, 56	+34 963 530 230	+34 963 531 688
Valladolid	CANTALAPIEDRA	Valladolid	Carretera de Soria A-24, km 5,5	+34 983 217 010	+34 983 200 921
Vizcaya	BILBU	Amorebieta	Barrio Boroa, s/n	+34 946 731 158	+34 946 733 265
	BILBU	Bilbao	Iturriaga, 78	+34 944 113 018	+34 944 128 637
	BILBU	Bilbao	Alameda Recalde, 39 - 41	+34 944 218 625	+34 944 218 879
Zamora	GONZALEZ Y GONZALEZ BERMAR S.L	Benavente	Polígono Industrial Benavente 2	+34 980 633 484	+34 980 637 552
	PORCELANOSA	Zamora	Avenida Cardenal Cisneros, s/n	+34 980 519 283	+34 980 529 404
Zaragoza	PORCELANOSA	Zaragoza	Parque Comercial Puerto Venecia	+34 976 930 800	+34 976 930 603
	PORCELANOSA	Zaragoza	Autovía de Logroño, km 2	+34 976 403 131	+34 976 300 094
	PORCELANOSA	Zaragoza	Plataforma Logística PLA-ZA, Calle Taormina, 2	+34 876 269 500	+34 876 269 389

Showrooms Internacional

Albania	ALBA CERAMICA	Tirana	+355 4 83 00 084	+355 4 83 00 084
	ALBA CERAMICA PORCELANOSA GRUPO	Tirana	+355 4 22 33 817	+355 4 22 33 817
Alemania	CERAMICAS OHG	München	+49 (0) 89 318 280 0	+49 (0) 89 318 280 20
	CROONEN FLIESENHANDEL GmbH	Hamburg - Lurup	+49 (0) 40 / 83383 377	+49 (0) 40 / 83383 301
	FLIESEN THOMAS Fliesengroßhandel GmbH	Burgstädt	+49 (0) 3724 / 1856 0	+49 (0) 3724 / 1856 70
	GÖTZ & MORIZ GmbH	Freiburg	+49 (0) 76 145 180	+49 (0) 76 145 711 2
	KÖBIG FRANKFURT, Haus der Fliesen Hanauer	Frankfurt	+49 069 405 00 36	+49 069 405 00 370
	J. N. KÖBIG GmbH - Koblenz	Koblenz	+49 (0) 26 198 169 20	+49 (0) 26 198 169 10
	J. N. KÖBIG GmbH - Mainz	Mainz	+49 061 316 943 10	+49 061 316 942 75
	J. N. KÖBIG GmbH - Wiesbaden	Wiesbaden-Biebrich	+49 (0) 611 27810	+49 (0) 611 25674
	MÜHL 24 - Kranichfeld	Kranichfeld	+49 (0) 36 450 330	+49 (0) 36 450 332 89
	SCHMIDT-RUDERSDORF GmbH & Co	Bergisch Gladbach	+49 (0) 2204 / 4007 0 771	+49 (0) 3320 / 854715
	SCHMIDT-RUDERSDORF- Bonn	Bonn-Buschdorf	+49 02 28 - 55 916-0	
	SCHMIDT-RUDERSDORF- Leverkusen	Leverkusen	+49 02 14 - 8 68 13 0	+49 02 14 - 8 68 13 13
	SCHMIDT-RUDERSDORF- Würselen	Würselen	+49 0 24 05 - 41 38 50	+49 0 24 05 - 41 38 55
	TAXIS - Bruchsal	Bruchsal	+49 (0) 72 518 005 0	+49 (0) 72 518 005 40
	TAXIS - Crailsheim	Crailsheim	+49 (0) 7951 301 0	+49 (0) 7951 301 100
	TAXIS - Kehl	Kehl / Rhein	+49 (0) 78 519 383 16	+49 (0) 78 519 383 20
	TAXIS - Reutlingen	Reutlingen	+49 (0) 71 219 884 0	+49 (0) 71 219 884 40
	TAXIS - Stuttgart	Stuttgart	+49 (0) 71 189 003 121	+49 (0) 71 189 003 104
	TAXIS - Schweningen	VS-Schwenningen	+49 (0) 77 206 927 0	+49 (0) 77 206 927 35
	W. LINNENBECKER GmbH	Bad Salzflen	+49 (0) 5222 / 5301 221	+49 (0) 5222 / 5301 209
	W. LINNENBECKER GmbH & Co. KG	Berlin	+49 (0) 30 / 756 888	+49 (0) 30 / 756 88 756
	W. LINNENBECKER GmbH & Co. KG	Bottrop	+49 (0) 2041 / 7958 13	+49 (0) 2041 / 7958 10
Arabia Saudi	KHALED AL ANSARI SHOWROOM	Al ahsa (Al-Sharqiyya)	+966 3 5892888	+966 3 5817043
	MANART AL ANDALOS EST	Jeddah	+966 2 629 3402	+966 2 629 3416
	MANART AL ANDALOS EST	Riyadh	+966 1 282 1500	
Argentina	BARUGEL, AZULAY & CIA	Buenos Aires	+54 11 4704 1500	
	BLAISTEN S.A.	Buenos Aires	+54 11 463 620 00	+54 11 463 614 86
Armenia	SACO & ARARAT-SALON BOMOND	Yerevan	+37 410 55 08 99	+37 410 51 75 81
Australia	ACE STONE & TILES	Brisbane	+61 7 5493 3344	+61 7 5493 3117
	EARP BROS TILE - NEWCASTLE	Newcastle	+61 2 4925 4555	+61 2 4962 2926
	EARP BROS TILE - SYDNEY	Sydney	+61 2 9410 3222	+61 2 9410 2011
	EARP BROS TILE - MELBOURNE	Melbourne	+61 3 9328 8598	+61 3 9348 9996
	ITALIA CERAMICS	Adelaide	+61 8 8336 2366	+61 8 8336 9016
	MIDDLE SWAN TRADING	Osborne Park	+61 8 9445 1777	+61 8 9446 3127
Austria	BEINKOFER BEI HOLTER	Hall	+43 (0) 5223 5046910	+43 (0) 5223 5046919
	BEINKOFER	Linz	+43 732 776 543 0	+43 732 776 543 60
	BEINKOFER	Linz	+43 (0) 732 6552550	+43 (0) 732 65525520
	BEINKOFER BEI HOLTER	Salzburg	+43 (0) 662 469096920	+43 (0) 662 469094289
	BEINKOFER BEI HOLTER	Wels	+43 (0) 7242 25253210	+43 (0) 7242 25253250
	BEINKOFER BEI BÄDERPARADIES	Wien	+43 (0) 1 52242200	+43 (0) 1 522422020
	BEINKOFER BEI HOLTER	Wien	+43 (0) 1 61516006900	+43 (0) 1 61516006909
	FLIESEN CENTER TIROL	Insbruck	+43 (0) 512 364444	
	FLIESENFÜHRER HANDELS GmbH	Wien	+43 1 5971 533 0	+43 1 5971 533 28
	TENNE BRUCK	Bruck/Mur	+43 3862 588 44	+43 3862 588 44-22
	FLIESEN TENNE	Graz	+43 316 262 524 0	+43 316 262 524 22
	TENNE LIBNITZ KINDERMANN BAD & HEIZTECHNIK	Leibnitz	+43 3452 707-65	+43 3452 707-29
	TENNE VÖSENDORF	Vösendorf	+43 1 699 33 33	+43 1 699 33 33-22
	TENNE WIEN 22 BADKULT-NORT	Wien	+43 1 20 20 520	+43 1 20 20 520-20

Azerbaiján	AKSESUAR INSAAT	Baku	+994 12 546 74 86	+994 12 546 74 86
	AKSESUAR PORCELANOSA GRUPO	Baku	+994 12 596 25 48 · +994 12 497 31 03	+994 12 447 43 83
Bahráin	AL ABBAS GALLERY	Manama	+973 741 919	+973 741 747
Bélgica	PGB CERAMICA NV	Heist-op-den-Berg	+32 (0)15 253366	+32 (0)15 253367
Bielorrusia	Domiert	Minsk	+375 17 259 60 33	+375 17 259 6212
	POLCAR IMPEX	Gomel	+375 2327 76919	+375 2327 76757
	POLCAR IMPEX	Minsk	+375 1721 78785	+375 1721 75632
Bolivia	ELEMENTO DISEÑO & ARQUITECTURA	Santa Cruz	+591 3 364 7313	+591 3 347 6226
Bosnia-Herzegovina	BROTIS d.o.o.	Citluk	+387 633 21500	+387 366 50950
	LUK d.o.o.	Banja Luka	+387 51 379 261/262	+387 51 370 887
	LUK d.o.o.	Bijeljina	+387 55 228 100	+387 55 228 101
	LUK d.o.o.	Sarajevo	+387 33 777 888	+387 33 777 889
Brasil	PORCELANOSA BRASIL REVESTIMENTOS LTDA	Campo Largo	+55 (41) 3392 1500	+55 (41) 3392 1400
	ELIS-GE EOOD	Sofia	+359 2 860 60 60	
	ELIS-GE EOOD	Varna	+395 52 500 555	
	NIKMAR	Petrich	+359 866 321 111	+359 745 234 64
	NIKMAR	Sofia	+395 888 143 313	
	NIKMAR	Sofia	+359 2 868 93 95	
Canadá	FONTILE DISTRIBUTORS	Vancouver	+604 683 9358	+604 683 6758
	Porcelanosa Calgary	Calgary	(587) 349-2290	
Chile	ATIKA	Santiago de Chile	(56 2) 2488 3000	(56 2) 2488 3001
	BUDNIK HERMANOS S.A.	Santiago de Chile	+562 398 0100	+562 212 3058
	PORCELANOSA GRUPO CHILE	Las Condes	+569 5 653 4306	
China	EURO BUILDING MATERIAL SUPPLIES (EURO)	Shanghai	021-64682083	
	GUA XIA	Harbin	-	
	JIA ZHI YUN	Tianjin	022-27839766	
	JIASHUIA	Shanghai		
	JING LI TIAN	Wuhan	027-83568709	
	JONG GONG	Dalian		
	JU CHENG	Xian	029-85364486	
	MEI LI MING JIA	Changchun	0431-84555263	
	MEIKALONG	Shanghai	021-32510621	
	MING DU SHI JIA	Taizhou	0576-81891333	
	PIN GE	Xian	029-68755405	
	PO YICK BUILDING MATERIALS Co. Ltd.	Beijing	+86 10 8527 1313	+86 10 6422 9976
	FUZHOU JINAN PO YICK BUILDING MATERIALS SHOP	Fuzhou	+86 591 8805 5823	+86 591 8805 5823
	PO YICK BUILDING MATERIALS Co. Ltd. (FAFA)	Guangzhou	+86 20 2200 8228	+86 20 2200 8230
	PO YICK BUILDING MATERIALS Co. Ltd. (MAFO)	Guangzhou	+86 20 8701 8223	+86 20 8701 8226
Chipre	GUANGZHOU PO YICK DECORATION DESIGN CO LTD SHANGHAI BRANCH	Shanghai	+86 21 6438 3735	+86 21 6428 1607
	BAO LU SHA PO YICK BUILDING MATERIALS Co. Ltd.	Shenyang	+86 24 8563 7137	+86 24 8563 7137
	PO YICK BUILDING MATERIALS Co. Ltd. (BAILIMA)	Shenzhen	+86 755 8240 7728	+86 755 8240 7738
	PO YICK BUILDING MATERIALS Co. Ltd. (HONGHU LU)	Shenzhen	+86 755 2562 0359	+86 755 2562 0344
	XIAMEN PO YICK BUILDING MATERIALS SHOP	Xiamen	+86 952 3755123	+86 591 88055823
	SAN RONG	Hangzhou	0571-86085805	
	TUO LI KONG JIAN	Qingdao		
	WU XING SHANG JIANG	Dalian	0411-84642028	
	WU XING SHANG JIANG	Shenyang	024-64671727	
	YI JIA	Fuzhou	0591-87144372	
	Porcelanosa Grupo Shanghai	Shanghai	021 54255610	
	Porcelanosa Grupo Tianjin	Tianjin	18622088585	
Colombia	MAOURIS OIKOSET	Nicosia	22444555	
	MEPAS LTD	Girne	9039 2815 2964	9039 2815 5651
	THE ENGINEERING AND COMMERCIAL ASSOCIATION (EKA)	Limassol	+357 2585 4444	+357 2585 4545
	PROSEIN	Barranquilla	+57 5 3006208	
Croacia	PORCELANOSA GRUPO COLOMBIA	Bogotá	+57 743 5566	
		Bogotá	+571 310 02 45	
	SPINA	Porec	+385 52 451 348	+385 52 434 005
	SPINA	Pula	+385 52 219 002	+385 52 219 118
	SPINA	Rijeka	+385 51 741 300	+385 51 741 298
	SPINA	Split	+385 21 668 991	+385 21 668 992
	SPINA	Varazdin	+385 42 303 707	+385 42 303 709
	SPINA	Zagreb	+385 13 492 552	+385 13 492 560

Ecuador	ARKETIP'S CA	Guayaquil	+593 422 467 52	+593 422 403 96
	ARKETIP'S CA	Quito	+593 422 498 39	+593 225 573 99
	TERRAZOS DE LOS ANDES	Quito	2 241 2284	
EE.UU.	PORCELANOSA ANAHEIM	Anaheim	+1 714 772 3183	+1 714 772 9851
	PORCELANOSA SAN FRANCISCO	San Francisco	+1 415 593 7763	+1 415 593 7664
	PORCELANOSA SAN JOSE	San Jose	+1 408 467 9400	+1 408 467 9410
	PORCELANOSA WEST HOLLYWOOD	West Hollywood	+1 310-300-2090	
	PORCELANOSA RIVERSIDE	Riverside	+1 203 698 7618	+1 203 698 7619
	PORCELANOSA MIAMI	Miami	+1 305 715 7153	+1 305 592 6999
	PORCELANOSA POMPANO BEACH	Pompano Beach	+1 954 968 7666	+1 954 968 7699
	PORCELANOSA ATLANTA	Atlanta	3057157153	
	PORCELANOSA CHICAGO	Chicago	+1 312 204 6220	+1 312 204 6240
	PORCELANOSA ROCKVILLE	North Bethesda	+1 301 294 8193	
	PORCELANOSA BOSTON - BOSTON DESIGN CENTER	Boston	+1 617-963-7666	
	PORCELANOSA EAST BRUNSWICK	East Brunswick	+1 732 613 1915	+1 732 613 9181
	PORCELANOSA PARAMUS	Paramus	+1 201 712 0556	+1 201 599 1520
	PORCELANOSA RAMSEY	Ramsey	+1 201 995 1310	+1 201 995 1960
	PORCELANOSA NYDC	New York	+1 212 252 7370	
	PORCELANOSA WESTBURY	Westbury	+1 516 338 0097	+1 516 338 0098
	PORCELANOSA DALLAS	Dallas	+1 214 377 2327	+1 214 234 1340
Egipto	MAHGOUB TRADING & IMPORTING	El Cairo	+20 2 57 12 565	+20 2 57 39 344
Emiratos Árabes Unidos	GALAXY BUILDING MATERIALS TRADING	Abu Dhabi	+971 2 2222191	+971 2 6354665
	GALAXY TRADING	Al Khabisi (Dubai)	+971 42696882	
Eslovaquia	CERSA	Bratislava	421244442833	421244642113
	ELKEM	Kosice	055 7281 611	055 7281 617
	VODOARM	Kosice	055/6222660	055/6222654
Eslovenia	MAVI Maribor d.o.o.	Maribor	+386 2 23 50 316	+386 2 23 50 312
Estonia	PLAADIPUNKT	Tallinn	+372 650 0720	+372 650 0723
Federación Rusa	4STYLE	Novosibirsk	+7 (383) 303 15 46	
	ARTISAN	Moscow	+7 (495) 742 40 40	
	DOM PLITKI	Moscow	+7 (499) 317 13 81	
	BOMOND	Volgograd	+7 (8442) 944 709	
	BOMOND	Grozny	+7 (8712) 224 546	
	DOM APEX	Khabarovsk	(4232) 30 06 88	
	DOM APEX	Vladivostok	+7 (4232) 300 688	
	DOM LAVERNA	St. Petersburg	+7 (812) 327 94 09	
	DOM LAVERNA	St. Petersburg	+7 (812) 7777 030	
	DOM LAVERNA	St. Petersburg	+7 (812) 329 56 65	
	KERAMIKA & KERAMONGRANIT		+7 (4012) 370 460	
	MASTER DOM	Moscow	(499) 120 00 77	
	MASTER DOM	Moscow	(499) 120 00 77	
	SALON BOMOND	Rostov Na Donu	+7 (863) 266 50 34	
	SALON BOMOND	Krasnodar	+7 (862) 234 10 75	
	SALON BOMOND	Sochi	+7 (8622) 612 317	
	SALON BOMOND	Pyatigorsk	+7 (8793) 975 544	
	SALON ELITNOY KERAMIKI NOVUS	St. Petersburg	+7 (812) 325 12 45	
	SALON UNDERGROUND	Moscow	+7 (495) 253 69 32	
	SALON VALENCIA	Stavropol	+7 (8652) 298 151	
	T. D. MODERN	Makhachkala	+7 (8722) 676 569	
	ZODIAC	St. Petersburg	+7 812 994 79 49	
	ZODIAC	Khimki	+7 (495) 747 31 69	
	ZODIAC	Moscow	+7 (495) 984 28 57	
	ZODIAC	Moscow	+7 (495) 730 97 97	
	ZODIAC	Mytisch	+7 (495) 221 75 00	
Filipinas	CASA EUROPA INC.	Taguig (Manila)	+63 2 519 3515	
Finlandia	LAATTAPISTE ESPOO	Espoo (Suomenoja)	+358 (0)207 880 750	
	LAATTAPISTE HÄMEENLINNA	Hämeenlinna	+358 (0)207 414 770	
	LAATTAPISTE HYVINKÄÄ	Hyvinkää	+358 (019) 455 830	
	LAATTAPISTE JOENSUU	Joensuu	+358 (0)207 880 880	
	LAATTAPISTE JYVÄSKYLÄ	Jyväskylä	+358 (0)207 433830	
	LAATTAPISTE KOTKA	Kotka	+358 (0)102 314 100	
	LAATTAPISTE KOUVOLA	Kouvola	+358 (0)20 7880 760	

	LAATTAPISTE KUOPIO	Kuopio	+358 (0)17-266 3500	
	LAATTAPISTE LAHTI	Lahti	+358 (03) 875 950	
	LAATTAPISTE LAPPEENRANTA	Lappeenranta	+358 (0)207 880 720	
	LAATTAPISTE MIKKELI	Mikkeli	+358 (015) 212 055	
	LAATTAPISTE OULU	Oulu	+358 (0)20 7880 780	
	LAATTAPISTE PORI	Pori	+358 (0)207 288 320	
	LAATTAPISTE PORVOO	Porvoo	+358 (019) 5766767	
	LAATTAPISTE TURKU	Raisio	+358 0207 288 300	
	LAATTAPISTE RAUMA	Rauma	+358 (0)207 288 310	
	LAATTAPISTE ROVANIEMI	Rovaniemi	+358 (016) 310 403	
	LAATTAPISTE SALO	Salo	+358 (02) 733 1494	
	LAATTAPISTE SAVONLINNA	Savonlinna	+358 (015) 522 178	
	LAATTAPISTE SEINÄJOKI	Seinäjoki	+358 (0)207 880 700	
	LAATTAPISTE TAMPERE	Tampere	+358 (03) 3142 3300	
	LAATTAPISTE VAASA	Vaasa	+358 (0)207 880 740	
	LAATTAPISTE OY	Vantaa	+358 9 878031	+358 9 890832
Francia	ART ET STYLES	Biguglia	+33 (0)495 589 898	+33 (0)495 305 318
	ART ET STYLES	Ajaccio	+33 (0)495 221 999	+33 (0)495 231 547
	PORCELANOSA MEAUX	Meaux	+33 (0)160 092828	+33 (0)160 093131
	PORCELANOSA NICE	Nice	493041963	
	PORCELANOSA CANNES/MANDELIEU	Mandelieu La Napoule	+33 (0)493 477 360	+33 (0)493 477 402
	PORCELANOSA MARSEILLE	Aubagne	+33 (0)442 624 330	+33 (0)442 624 339
	PORCELANOSA PLAN DE CAMPAGNE	Les Pennes Mirabeau	+33 (0)442 466 120	+33 (0)442 466 129
	PORCELANOSA CAEN	Mondeville	+33 (0)231 820 000	+33 (0)231 820 019
	PORCELANOSA DIJON	Chenôve	+33 (0)380 588 701	+33 (0)380 588 595
	PORCELANOSA BESANÇON	Besançon	+33 (0)381 416 363	+33 (0)381 416 369
	PORCELANOSA BREST	Brest	+33 (0)298 025 100	+33 (0)298 415 401
	PORCELANOSA NÎMES	Nimes	+33 (0)466 282 780	+33 (0)466 282 781
	PORCELANOSA BORDEAUX	Merignac	+33 (0)556 124 848	+33 (0)556 124 849
	PORCELANOSA MONTPELLIER	Pérols	+33 (0)467 503 600	+33 (0)467 501 121
	PORCELANOSA RENNES	Saint Grégoire - Rennes	+33 (0)223 200 808	+33 (0)299 369 688
	PORCELANOSA TOURS	Chambray les Tours	+33 (0)247 808 787	+33 (0)247 808 789
	PORCELANOSA LA BAULE	Guerande	+33 (0)240 607 273	+33 (0)240 110 659
	PORCELANOSA NANTES	Orvault	+33 (0)228 073 950	+33 (0)228 073 957
	PORCELANOSA ORLEANS	Olivet	+33 (0)238 496 961	+33 (0)238 496 969
	PORCELANOSA ANGERS	Beaucouzé	+33 (0)241 738 100	+33 (0)241 733 721
	PORCELANOSA LORIENT	Lorient	+33 (0)297 875 000	+33 (0)297 370 607
	PORCELANOSA VANNES	Vannes	+33 (0)297 460 292	+33 (0)297 461 210
	PORCELANOSA LILLE	Lezennes	+33 (0)320 340 340	+33 (0)320 340 341
	PORCELANOSA MULHOUSE	Wittenheim	+33 (0)389 570 260	+33 (0)389 570 261
	PORCELANOSA STRASBOURG	Vendenheim	+33 (0)388 209 212	+33 (0)388 209 107
	PORCELANOSA LYON	Champagne Au Mont d'Or	+33 (0)478 668 151	+33 (0)478 432 003
	PORCELANOSA LE MANS	La Chapelle Saint Aubin	+33 (0)243 236 520	+33 (0)243 240 512
	PORCELANOSA MELUN	Vert Saint Denis	+33 (0)160 565 747	+33 (0)160 569 080
	PORCELANOSA ROUEN	Sotteville les Rouen	+33 (0)235 650 655	+33 (0)235 650 656
	PORCELANOSA MONTIGNY	Montigny - Les Cormeilles	+33 (0)139 311979	+33 (0)139 311492
	PORCELANOSA PARIS PORTE D'ORLEANS	Arcueil	+33 (0)149 121 257	+33 (0)149 121 258
	PORCELANOSA LA ROCHE S/YON	La Roche sur Yon	+33 (0)251 241 217	+33 (0)251 242 399
	PORCELANOSA POITIERS	Chasseneuil Du Poitou	+33 (0)549 119 787	+33 (0)549 119 788
	PORCELANOSA COIGNIERES	Coignières	+33 (0)130 491280	+33 (0)130 491328
	PORCELANOSA TOULOUSE SAS	Toulouse	05 34 56 57 60	05 34 56 57 86
	STUDIO PORCELANOSA	Paris	01.42.84.84.00	01.42.84.84.01
Georgia	LUXOR SHOP	Tbilisi	+995 32332960	+995 32001368
Ghana	ROUGE INTERIORS	Dzorwulu-Accra	+223 302 734752	
Gibraltar	LIFESTYLE DESIGN STUDIO LTD	Gibraltar	35020066390	
Grecia	AURORA BAGNO	Attica	+30 2105 594 520	+30 2105 594 521
	HATZ GROUP	Glifada	+30 2310 752 902	+30 2310 753 564
	PORCELANA	Atenas	210 9607010	210 9607013
	PORCELANA	Atenas	210 5156163	210 5156164
	PORCELANA	Atenas	2299041090	2299041095
	PORCELANA	Ioannina	26510 92735-7	26510 92738
	PORCELANA	Kastoria	2467044174	

	PORCELANA	Katerini	2351076941	2351076940
	PORCELANA	Kefalonia	2671068360	26710 68 361
	PORCELANA	Larisa	2410561280	
	PORCELANA	Larisa	2410 619999	2410 617444
	PORCELANA	Lefkada	26450 72100	26450 29130
	PORCELANA	Nafpaktos	2634038393	26710 68 361
	PORCELANA	Patra	2610524000	2610523532
	PORCELANA	Patra	2610647474	2610242010
	PORCELANA	Rhodes	2241003315	2241003316
	PORCELANA	Serres	2321036157	
	PORCELANA	Thessaloniki	2310700861	2310700861
	PORCELANA	Thessaloniki	2310753003	2310753003
	PORCELANA	Thessaloniki	2310474767	2310 474403
	PORCELANA	Trikala	2351076941	
Guadalupe	GUADELOUPE CERAMIQUE	Baie Mahault	590 266 261	590 266 412
Guayana Francesa	ETS HENRY LE GAC	Cayenne	+594 302 719	+594 300 713
Hong Kong	TAI YICK BUILDING MATERIALS	Kowloon	+852 23 956 670	+852 23 957 831
Hungria	PALATINUS FURDOSZOBASZALONOK	Békéscsaba	+36 66 328 432	+36 66 328 432
	PALATINUS FURDOSZOBASZALONOK	Budapest	+36 1-430-04-17	+36 1-387-91-36
	PALATINUS FURDOSZOBASZALONOK	Drebecen	+36 52 531 476	+36 52 536 822
	PALATINUS FURDOSZOBASZALONOK	Eger	+36 0636-312-013	+36 0636-313-270
	PALATINUS FURDOSZOBASZALONOK	Gyöngyös	+36 37-500-162	+36 37-500-163
	PALATINUS FURDOSZOBASZALONOK	Kecskemét	+36 76 412 272	+36 76 509 204
	PALATINUS FURDOSZOBASZALONOK	Miskolc	+36 46-412-741	+36 46-416-256
	PORCAHUNGARY KFT	Budapest	+36 1 237 08 78	
Iraq	AKSESUAR INSAAT ERBIL	Erbil	+964 750 835 0055	+964 66 210 1900
Irlanda	O.B. HEATING, PLUMBING, BATHROOMS & TILES	Cork	+353 0 214 310 000	+353 0 214 310 003
	TILESTYLE LTD	Dublin	+00 353 1 8555200	+00 353 1 8557471
Islandia	ALFABORG EHF	Reykjavik - 4	+354 568 6755	+354 568 1277
Israel	AL-KHAYAL (BAYTOUNA)	Bethlehem St. (West Bank)	+972 2 277 7279	+972 2 274 4026
	AMOZI NAGAR IMP.MARK.OGEN LTD	Raanana	+972 9 760 1501	+972 9 741 1997
	AS OZ	Jerusalem	+972 2 6483015	+972 2 6781482
	BAR-AMI 1990 LTD	Jerusalem	+972 2 531 3444	+972 2 538 3740
	HEZI BANK	Bney Brak	+972 3 616 6641	+972 4 904 6643
	KAMARIKA	Upper Galily	+972 4 680 1010	+972 4 680 0318
	KIMCHI	Beersheva	+972 8 628 2060	+972 8 623 2369
	TOPOLSKI & CO LTD	Haifa	+972 4 904 0496	+972 4 904 0455
Italia	MIDIL-CERAMICHE S.A.S	Andria	+39 08 835 66466	+39 08 835 49260
	Ceramiche dueP s.r.l.	Cassino	(+39) 077625142	
	PORCELANOSA LOMBARDIA	Corsico	+39 02 458 64310	+39 02 458 64415
	PORCELANOSA	Sassuolo	+39 05 368 06677	+39 05 368 02184
	PORCELANOSA ROMA	Roma	+39 06 888 9977	+39 06 888 7056
Jersey	PASTELLA GROUP	St. Saviour	01534 870167	01534 723199
Jordania	AYMAN ABDALLAT & PARTNERS CO.	Amman	+9626-5504592/92/93/95	+9626-5514149
Kosovo	N P KERASAN	Prishtina	+381 38 602 667	+381 38 602 667
Kuwait	HASSAN ABUL HASSAN SADIQ	Safat	+965 262 4466	+965 265 1444
Letonia	TORMANIS UN PARTNERI	Riga	+371 784 5361	+371 784 5360
Libano	GEAHCHAN GROUP	Beirut	+961 1 480520	961 1 496607
	PORCELANOSA GROUP BEIRUT	BEIRUT	+961 1480520	+961 1 496607
Libia	BEN ALI GROUP	Benghazi	21612220618	
	MANART AL ANDALOS EST	Berka benhazi	21861229605	
Lituania	IRIS LTD	Alytus	+370 315 55969	+370 315 55968
Malta	FREE PHONE TAXI (STYLISH BAHTROOM)	St Julian	35621382512	
	ROGER SATARIANO & SONS LTD	Birkirkara	+356 21 442 769	+356 21 497 017
Marruecos	CERAMEX	Casablanca	+212 945 3646166	+212 5223 395363
	FACENOR S.A.	Tanger	+212 39 941 910	+212 39 945 445
	GLOBE CERAMIQUE SA	Casablanca	+212522394301	+212522394303
	SANITAIRE 2000	Casablanca	+212 22 363 225	+212 22 394 100
Martinica	JOSEPH COTTRELL S.A.	Lamentin	+596 509 810	+596 506 524
México	DESIGN CENTER INTERLOMAS	Interlomas	+55 36 05 00 64 · +55 36 05 00 65 · +55 36 05 00 67	
	PORCELANOSA MÉXICO	México DF	+55 5831 7340	
	PORCELANOSA MÉXICO	Valle Dorado	+55 2620 0186 · +55 5831 7340 · 01 800 833 23 02	

Moldavia	PLIMED	Chisinau	+373 2 2501252/54/55/56	+373 2 2716824
Mónaco	Porcelanosa Monaco	Monaco	37793502387	
Mongolia	ZUUNNAIMAN SUVRAGA CO.LTD	Ulaanbaatar	+976 (11) 3414 217	
Noruega	NORFLIS VEST	Bergen	47 55948260	
Omán	ROYAL TILES CO	Muscat	+968 9586 8897	
Países Bajos	PGN CERAMICA B.V.	Amsterdam	+32 (0)15 253366	+32 (0)15 253367
Panamá	EURO CER S.A.	Punta Pacifica	+507 21 53660	
Perú	ARQ-STUDIO	Lima	+51 143 5729	
	ARQ-STUDIO	Lima	+511 372 3462	
	ARQ-STUDIO	Lima	+511 421 7106	
	CASSINELLI	Lima	+51 14 513 712	+51 15 612 757
	PORCELANOSA GRUPO PERÚ	San Isidro	+519 4600 7828	
Polonia	ADARI	Bielsko Biala	+48 33 822 0449	+48 33 822 0449
	ADARI	Gliwice	+48 32 232 2155	+48 32 232 2155
	ADARI	Katowice	+48 32 258 9574	+48 32 258 9574
	AKCESS	Bialystok	+48 85 6643436	+48 85 6643434
	AND-BUD	Lublin	081 469 9617	
	AND-BUD	Rzeszów	017 785 1020	
	AND-BUD	Tarnobrzeg	015 823 0148	
	ANICAR	Warszawa	+48 22 843 70 98	
	ANICAR	Warszawa	0226 730 371	
	ANICAR	Warszawa	+48 22 658 08 05	
	ART CERAMIKA	Gliwice	+48 32 339 8200	+48 32 339 8209
	CAMERO DESIGN	Radom	+48 48 385 14 00	
	CERAMIKA PRIMUS	Radom	+48 48 381 0287	+48 48 381 0290
	CERMAG POZNAN (BYDGOSZCZ)	Bydgoszcz	+48 52 348 93 43	+48 52 348 93 54
	CERMAG POZNAN (GORZÓW WLKP)	Gorzów Wlkp	+48 95 721 41 08	+48 95 721 41 08
	CERMAG POZNAN (KOLOBRZEG)	Kolobrzeg	+48 94 355 18 88	+48 94 355 18 80
	CERMAG POZNAN (LESZNO)	Leszno	+48 65 529 63 63	+48 65 529 63 63
	CERMAG POZNAN (OLSZTYN)	Olsztyn	+48 89 534 41 21	
	CERMAG POZNAN (OSTRÓW WLKP)	Ostrów Wlkp	+48 62 735 81 12	+48 62 737 28 91
	CERMAG POZNAN	Poznan	+48 61 835 97 50-54	+48 61 830 23 78
	CERMAG POZNAN (SOPOT)	Sopot	+48 58 550 4235	+48 58 550 5459
	CERMAG POZNAN (WARSZAWA)	Warszawa	+48 22 252 57 39	+48 22 252 57 39
	CERMAG POZNAN (WROCLAW)	Wroclaw	+48 717 820 021	+48 717 820 031
	EGEN	Lublin	+48 81 441 58 42	+48 81 441 80 74
	EXCLUSIVE	Kielce	+48 41 345 75 49	
	F.H. BOZ S.A.	Rzeszów	+48 17 850 0315	+48 17 850 0341
	FUMINO	Lodz	+48 426373767	
	GRES	Lodz	0814 450 301	
	GRESTON	Warszawa	+48 022 720 5525	+48 022 720 5524
	KWADRAT	Olsztyn	089 539 1646	
	MAX FLIZ	Kraków	+48 01 229 07060	+48 01 229 07060
	MAX FLIZ	Wroclaw	0784 980 809	
	P.H.U. CERAMED	Bielsko Biala	+48 33 829 8770	+48 33 829 8773
	P.H.U. FUGA	Czestochowa	+48 343682944	+48 343682944
	SANIMEX	Gliwice	0322 708 029	
	SANIMEX	Katowice	+48 32 735 27 14	
	SANIMEX	Rybnik	+48 32 424 44 34	
	STEMAR	Gorzów Wlkp	0957 204 555	
	STEMAR	Poznan	616425802	
	STEMAR	Szczecin	+48 91 453 17 82	
	WOIS SP Z.O.O	Warszawa	+48 22 6127213	+48 22 6127216
Portugal	DCMT-DECORAÇÃO E MATERIAIS DE CONST.LDA	BRAGANÇA	+ 351 273333849	+351 273333848
	FLAVIGRES, S.A.	CHAVES	+351 276 341102	+351 276 341736
	FURMAT - MATERIAIS DE CONSTRUÇÃO, LDA	Ponta Delgada	+351 296 629 277	
	HEITOR CAMPOS AMOEDO LDA	MONÇÃO	+351 251652474	+351 251652446
	MATA S.A	FUNCHAL	+351 291930110	+351 291936412
	PORCELANOSA VISEU	Viseu	+351 232 430440	+351 232 430449
	PORCELANOSA LISBOA	Lisboa	+351 218 313 020	+351 218 313 029
	PORCELANOSA PORTO	Porto	+351 226 166 600	+351 226 161 959

Puerto Rico	THE TILE SHOP	Guaynabo	+1 787 720 2030	+1 787 790 2030
	THE TILE SHOP	San Juan	+1 787 775 2030	+1 787 707 0138
Qatar	UNITED SUPPLIES	Qatar	+974 46 85 164	+974 46 85 165
Reino Unido	PORCELANOSA SOUTH EAST	Reading	08444 818 954	08444 818 964
	PORCELANOSA WESTERN	Bristol	0117 959 71 51	0117 959 71 55
	PORCELANOSA SOUTH EAST	Peterborough	08444 818 957	08444 818 967
	PORCELANOSA WESTERN	Exeter	01392 215 552	01392 215 557
	PORCELANOSA SOUTH EAST	Watford	08444 818 951	08444 818 961
	PORCELANOSA SCOTLAND	Glasgow	0141 533 1000	0141 533 1007
	PORCELANOSA NORTH WEST	Manchester	0161 817 33 00	0161 817 33 01
	PORCELANOSA NORTH WEST	Warrington	01925 237 807	01925 237 888
	PORCELANOSA SOUTH EAST	Fulham	08444 818 952	08444 818 962
	PORCELANOSA SOUTH EAST	London	08444 818 959	08444 818 969
	PORCELANOSA SCOTLAND	Edinburgh	0131 335 38 83	0131 335 38 84
	PORCELANOSA SOUTH EAST	Norwich	08444 818 958	08444 818 968
	PORCELANOSA SCOTLAND	Newcastle Upon Tyne	0191 272 5224	0191 272 2986
	PORCELANOSA MIDLANDS	Nottingham	0115 983 65 00	0115 983 65 65
	PORCELANOSA WESTERN	Cardiff	0292 0465 166	0292 0465 156
	PORCELANOSA YORKSHIRE	Doncaster	01302 30 47 13	01302 30 47 15
	PORCELANOSA YORKSHIRE	Sheffield	01142 29 01 90	0114 255 22 65
	PORCELANOSA MIDLANDS	Cannock	01543 223025	01543 462959
	PORCELANOSA SOUTH EAST	Southampton	08444 818 956	08444 818 966
	PORCELANOSA SOUTH EAST	Croydon	08444 818 953	08444 818 963
	PORCELANOSA MIDLANDS	Solihull	0121 746 64 64	0121 746 64 65
	PORCELANOSA YORKSHIRE	Leeds	01132 20 60 90	0113 24 34 024
República Democrática del Congo	SOCIETE PANACHE	Kinshasa	+243 884 1677	+243 983 13893
	CARABELA S.R.L.	Bávaro	+ 1 809 466 0020	+ 1 809 466 2006
	CARABELA S.R.L.	La Romana	+ 1 809 556 3606 / 809 550 9006	+ 1 809 221 7416
	CARABELA S.R.L.- PORCELANOSA	Santiago	+ 1 809 971 1234	+ 1 809 971 6728
	CARABELA S.R.L.	Santo Domingo	+ 1 809 544 2560	+ 1 809 541 0818
Reunión	L'ESPACE BAIN DOUCHE	Saint Denis	+262 212 100	+262 212 101
	L'ESPACE BAIN DOUCHE	Saint Pierre	+262 353 536	+262 266 394
Rumanía	DELTA STUDIO PITESTI	Pitesti	0248/222.798	
	DELTA STUDIO BRASOV	Brasov	0368/402.049	
	DELTA STUDIO CONCEPT STORE	Bucarest	021/411.25.46	
	DELTA STUDIO MILITARI	Bucarest	031/405.82.17	
	DELTA STUDIO CONSTANTA	Constanta	0241/520.707	
	DELTA STUDIO IASI	Iasi	0232/431.963 ; 0730.586.938	
	DELTA STUDIO PIATRA NEAMT	Piatra-Neam?	0233/234.518	
	DELTA STUDIO PLOIESTI	Ploiesti	0244/514.791 ; 0723.541.737	
	GLAMOUR	Bucarest	0321 22932101	
	Porcelines	Bucarest	+40 756 093 720	
	SSAB IMPEX	Bacau	+40 234 513 957	+40 234 518 436
	SSAB IMPEX	Bucarest	+40 214 113 009	+40 214 120 097
Serbia	CERAMIC BY PORCELANOSA	Belgrado	+381 11 3343026	+381 11 3343297
	RACA COMPLETE	Novi Sad	+381 21 451 534	+381 21 472 0668
Singapur	FERNANDO MARTIN BENITO	Singapur	+65 97801472	+65 64621620
Sudáfrica	CLASSIC TRADING	Durban	+27 31 577 8382	+27 31 577 7056
	CLASSIC TRADING	Johannesburg	+27 11 656 0400	+27 11 656 0403
Suecia	KAKELPALATZET I BROMMA AB	Bromma	+46(0)8-56 487 831	+46(0)8-988 620
	KAKELPALATZET I BÄCKEBOL AB	Göteborg	+46(0)31-571 478	+46(0)31-571 477
	KAKELPALATZET I KATRINEHOLM AB	Katrineholm	+46(0)150-51 740	+46(0)150-51 775
	KAKELPALATZET I MOLNDAL (Central)	Möln dal	+46(0)31-776 50 51	+46(0)31-86 39 62
	KAKELPALATZET I NYKÖPING AB	Nyköping	+46(0)155-200 999	+46(0)155-211 244
	KAKELPALATZET I UDDEVALLA AB	Uddevalla	+46(0)522-64 54 00	+46(0)0522-64 54
Suiza	ARGECOM SA	Aubonne	+41(0)21 807 10 10	+41(0)21 808 61 02
	NEW FORM SWISS SAGL	Mendrisio	41919227356	
Surinam	NV RONANS TRADING	Paramaribo (Tourtonnelaan)	+597 451070	+597 450066

Tailandia	BOONTHAVORN CERAMIC (RATCHADAPISEK)	Bangkok	+66 2275-0029	+66 2275-2057
	BOONTHAVORN CERAMIC CO. LTD. (PIN-KLAO)	Bangkok	+66 2441-3075	+66 2441-4049
	BOONTHAVORN CERAMIC CO. LTD. (KASET NAVAMIN)	Bangkok	+66 2791-2777	+66 2943-9058
	BOONTHAVORN CERAMIC CO. LTD. (PATTAYA)	Bangkok	+66 38 052 222	+66 38 052 221
	BOONTHAVORN CERAMIC CO. LTD. (SUARNNABHUMI)	Bangkok	+66 2316-0429	+66 2750-0682
	BOONTHAVORN CERAMIC CO. LTD. (RANGSIT)	Pathumthane	+66 2902-0171	+66 2902-0184
	BOONTHAVORN CERAMIC CO. LTD. (HUAHIN)	Prachuabkirikun	+66 3252-2555//+66 5488-4144	+66 3252-0141
	BOONTHAVORN CERAMIC CO. LTD. (TONBURI-PAKTOR)	Samutsakon	+66 2896-4471-2	+66 2896-4473
Taiwan	NEW CENTURY CONSTRUCTIONAL	Kaohsiung	+886 7 384 8834	+886 7 387 1043
	NEW CENTURY CONSTRUCTIONAL	Taichung	+886 4 2372 8166	+886 4 2376 2818
	NEW CENTURY CONSTRUCTIONAL	Tainan	+886-7-3848834	
	NEW CENTURY CONSTRUCTIONAL	Taipei	73845135	
Túnez	ETTAAMIR NEGOCE	Tunis	+21670939459/ +21670939479	21670939379
Turquía	YÜTAS	Istambul	+90 2 1227 44720	+90 2 1227 20874
Ucrania	AGROMAT INTERIER	Lviv	(32) 272-87-21	
	CERAMIC CITY	Kiev		
	CERAMIC FASHION	Donetsk	(062) 381 23 31	
	CERAMIC FASHION	Kharkiv		
	CERAMIC FASHION	Kyiv	(044) 281 07 27	
	CERAMIC FASHION	Kyiv	(044) 246 79 79	
	CERAMIC FASHION	Lugansk	(642) 93-24-13	
	CERAMIC FASHION	Rivne	(362) 64 56 05	
	EUROPA	Dnipropetrovsk	(0562) 31-27-53	
	EUROPA	Kharkiv	(572) 23 59 95	
	FIRMENIY SALON PORCELANOSA GRUPO	Odessa	(482) 37 85 40	
	KERAM MISTO	Lviv	(32) 293 98 89	
	NAUTILUS	Donetsk	(062) 387 58 58	
	SALON KARMEN	Lviv	+380 32 244 40 55	+380 32 252 70 94
	SALON MILLENNIUM CONCEPT	Kyiv	(044) 279 60 60	
Uzbekistán	PREMIUM CONCEPT	Tashkent	+998(71) 256 29 05	
Venezuela	PROSEIN	Caracas	(+582) 1223 929 11	(+582) 1223 994 60
	PROSEIN EL BOSQUE	Caracas	(+582) 1276 256 01	
	PROSEIN LA CASTELLANA	Caracas	(+582) 1226 564 19	



butech®
PORCELANOSA Grupo

